

200W, 5V - 100V Surface Mount Transient Voltage Suppressor

FEATURES

- AEC-Q101 qualified
- Photo Glass passivated junction
- Low power loss, high efficiency
- Ideal for automated placement
- Excellent clamping capability
- Typical I_R less than $1\mu A$ above 10V
- Meets ISO 7637-2 (Pulse 1/2a/2b/3a/3b)
- 200 watts peak pulse power capability with a 10 / 1000 μs waveform ($V_{WM} \geq 60V$, $P_{PPM} = 175W$)
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

| KEY PARAMETERS | | |
|-------------------------------|------------|------|
| PARAMETER | VALUE | UNIT |
| V_{WM} | 5 - 100 | V |
| V_{BR} (uni-directional) | 6.8 - 117 | V |
| P_{PPM} | 200 | W |
| T_{JMAX} | 175 | °C |
| Package | SOD-123W | |
| Configuration | Single die | |



APPLICATIONS

- Protect sensitive circuit from damage by high voltage transients
- Lighting, ESD transient voltage protection of IC, system
- Inductive switching load protection of IC, system
- Electrical Fast Transient Immunity protection of IC, system



SOD-123W

MECHANICAL DATA

- Case: SOD-123W
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.016g (approximately)



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ unless otherwise noted)

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|-----------|-------------|------|
| Non-repetitive peak impulse power dissipation with 10/1000us waveform ⁽¹⁾ | P_{PPM} | 200 | W |
| Steady state power dissipation at $T_L = 25^\circ C$ ⁽²⁾ | P_{tot} | 1 | W |
| Forward Voltage @ $I_F = 12A$ for Uni-directional only ⁽³⁾ | V_F | 3.5 | V |
| Junction temperature | T_J | -55 to +175 | °C |
| Storage temperature | T_{STG} | -55 to +175 | °C |

Notes:

1. Non-repetitive Current Pulse Per Fig.3 and derated above $T_A = 25^\circ C$ Per Fig.2
2. Units mounted on PCB (5mm x 5mm Cu pad test board)
3. Pulse test with $PW = 0.3ms$

| THERMAL PERFORMANCE | | | |
|--|-----------------|------------|-------------|
| PARAMETER | SYMBOL | TYP | UNIT |
| Junction-to-lead thermal resistance | $R_{\theta JL}$ | 33 | °C/W |
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 100 | °C/W |
| Junction-to-case thermal resistance | $R_{\theta JC}$ | 34 | °C/W |

Thermal Performance Note: Units mounted on PCB (5mm x 5mm Cu pad test board)

| ORDERING INFORMATION | | |
|------------------------------------|----------------|----------------------|
| ORDERING CODE⁽¹⁾ | PACKAGE | PACKING |
| SMFxAH | SOD-123W | 10,000 / Tape & Reel |

Notes:

1. “x” defines voltage from 5V (SMF5.0AH) to 100V (SMF100AH)

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Part number | Marking code | Breakdown voltage $V_{BR}@I_T$ (V) (Note 1) | | Test current I_T (mA) | Working stand-off voltage V_{WM} (V) | Maximum reverse leakage current $I_R@V_{WM}$ (μA) (Note 1) | Maximum peak impulse current I_{PPM} (A) $t_p = 10/1000\mu\text{s}$ | Maximum clamping voltage $V_C@I_{PPM}$ (V) $t_p = 10/1000\mu\text{s}$ |
|-------------|--------------|--|------|-------------------------------|--|--|--|--|
| | | Min | Max | | | | | |
| SMF5.0AH | 2W5P0 | 6.4 | 7.0 | 10 | 5 | 800 | 21.7 | 9.2 |
| SMF6.0AH | 2W6P0 | 6.67 | 7.37 | 10 | 6 | 800 | 19.4 | 10.3 |
| SMF6.5AH | 2W6P5 | 7.22 | 7.98 | 10 | 6.5 | 500 | 17.9 | 11.2 |
| SMF7.0AH | 2W7P0 | 7.78 | 8.6 | 10 | 7.0 | 200 | 16.7 | 12.0 |
| SMF7.5AH | 2W7P5 | 8.33 | 9.21 | 1 | 7.5 | 100 | 15.5 | 12.9 |
| SMF8.0AH | 2W8P0 | 8.89 | 9.83 | 1 | 8.0 | 50 | 14.7 | 13.6 |
| SMF8.5AH | 2W8P5 | 9.44 | 10.5 | 1 | 8.5 | 10 | 13.9 | 14.4 |
| SMF9.0AH | 2W9P0 | 10.0 | 11.1 | 1 | 9.0 | 5 | 13.0 | 15.4 |
| SMF10AH | 2W010 | 11.1 | 12.3 | 1 | 10 | 5 | 11.8 | 17.0 |
| SMF11AH | 2W011 | 12.2 | 13.5 | 1 | 11 | 1 | 11.0 | 18.2 |
| SMF12AH | 2W012 | 13.3 | 14.7 | 1 | 12 | 1 | 10.1 | 19.9 |
| SMF13AH | 2W013 | 14.4 | 15.9 | 1 | 13 | 1 | 9.3 | 21.5 |
| SMF14AH | 2W014 | 15.6 | 17.2 | 1 | 14 | 1 | 8.6 | 23.2 |
| SMF15AH | 2W015 | 16.7 | 18.5 | 1 | 15 | 1 | 8.2 | 24.4 |
| SMF16AH | 2W016 | 17.8 | 19.7 | 1 | 16 | 1 | 7.7 | 26.0 |
| SMF17AH | 2W017 | 18.9 | 20.9 | 1 | 17 | 1 | 7.2 | 27.6 |
| SMF18AH | 2W018 | 20.0 | 22.1 | 1 | 18 | 1 | 6.8 | 29.2 |
| SMF20AH | 2W020 | 22.2 | 24.5 | 1 | 20 | 1 | 6.2 | 32.4 |
| SMF22AH | 2W022 | 24.4 | 26.9 | 1 | 22 | 1 | 5.6 | 35.5 |
| SMF24AH | 2W024 | 26.7 | 29.5 | 1 | 24 | 1 | 5.1 | 38.9 |
| SMF26AH | 2W026 | 28.9 | 31.9 | 1 | 26 | 1 | 4.8 | 42.1 |
| SMF28AH | 2W028 | 31.1 | 34.4 | 1 | 28 | 1 | 4.4 | 45.4 |
| SMF30AH | 2W030 | 33.3 | 36.8 | 1 | 30 | 1 | 4.1 | 48.4 |
| SMF33AH | 2W033 | 36.7 | 40.6 | 1 | 33 | 1 | 3.8 | 53.3 |
| SMF36AH | 2W036 | 40.0 | 44.2 | 1 | 36 | 1 | 3.4 | 58.1 |
| SMF40AH | 2W040 | 44.4 | 49.1 | 1 | 40 | 1 | 3.1 | 64.5 |
| SMF43AH | 2W043 | 47.8 | 52.8 | 1 | 43 | 1 | 2.9 | 69.4 |
| SMF45AH | 2W045 | 50.0 | 55.3 | 1 | 45 | 1 | 2.8 | 72.7 |
| SMF48AH | 2W048 | 53.3 | 58.9 | 1 | 48 | 1 | 2.6 | 77.4 |
| SMF51AH | 2W051 | 56.7 | 62.7 | 1 | 51 | 1 | 2.4 | 82.4 |
| SMF54AH | 2W054 | 60.0 | 66.3 | 1 | 54 | 1 | 2.3 | 87.1 |
| SMF58AH | 2W058 | 64.4 | 71.2 | 1 | 58 | 1 | 2.1 | 95 |
| SMF60AH | 2W060 | 66.7 | 73.7 | 1 | 60 | 1 | 1.8 | 96.8 |
| SMF64AH | 2W064 | 71.1 | 78.6 | 1 | 64 | 1 | 1.7 | 103 |
| SMF70AH | 2W070 | 77.8 | 86 | 1 | 70 | 1 | 1.55 | 113 |
| SMF75AH | 2W075 | 83.3 | 92.1 | 1 | 75 | 1 | 1.45 | 121 |
| SMF78AH | 2W078 | 86.7 | 95.8 | 1 | 78 | 1 | 1.4 | 126 |
| SMF85AH | 2W085 | 94.4 | 104 | 1 | 85 | 1 | 1.3 | 137 |
| SMF90AH | 2W090 | 100 | 111 | 1 | 90 | 1 | 1.2 | 146 |
| SMF100AH | 2W100 | 111 | 123 | 1 | 100 | 1 | 1.08 | 162 |

Notes:

1. Pulse test with $PW = 30\text{ms}$

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Pulse Power or Current vs. Initial Junction Temperature

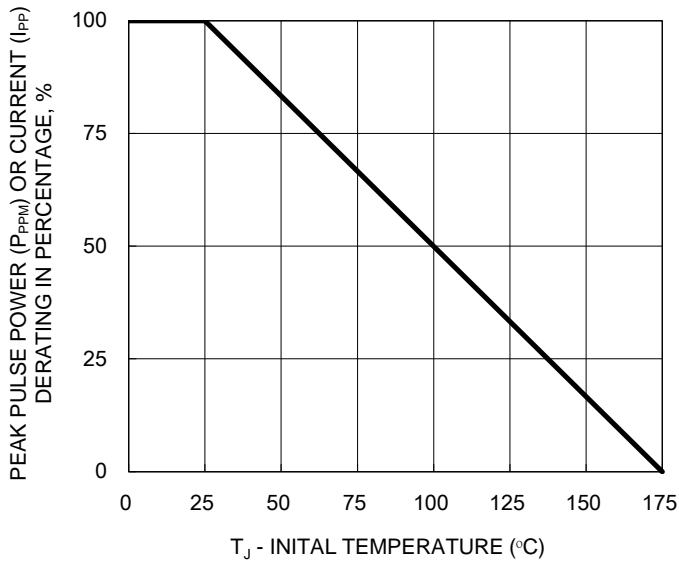


Fig.2 Steady State Power Derating

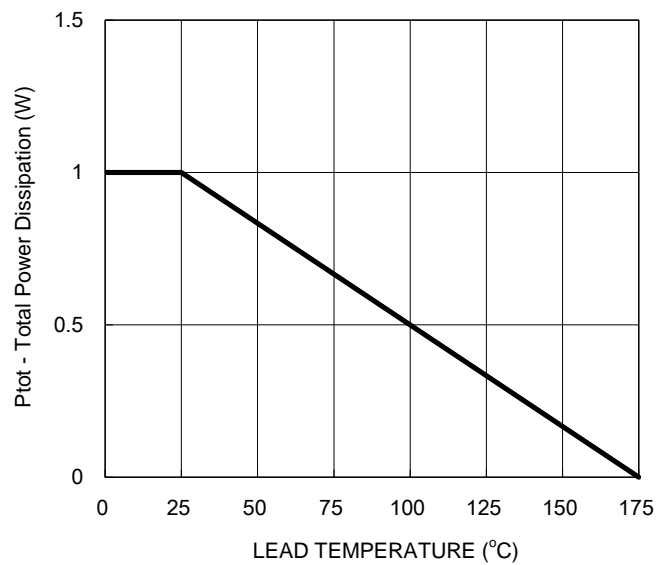


Fig.3 Clamping Power Pulse Waveform



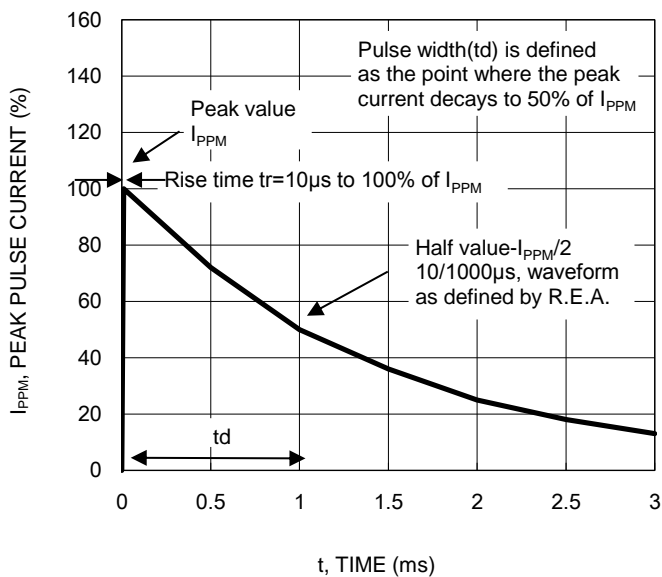


Fig.4 Typical Junction Capacitance

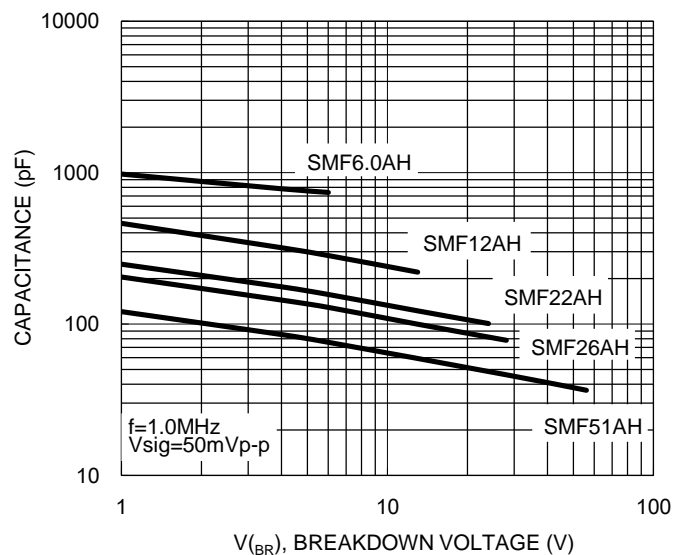


PACKAGE OUTLINE DIMENSIONS

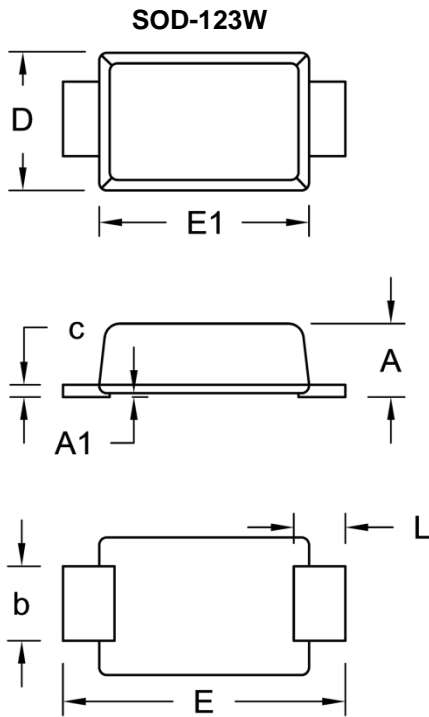

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.90 | 1.02 | 0.035 | 0.040 |
| A1 | 0.00 | 0.10 | 0.000 | 0.004 |
| b | 0.90 | 1.05 | 0.035 | 0.041 |
| c | 0.10 | 0.22 | 0.004 | 0.009 |
| D | 1.70 | 1.90 | 0.067 | 0.075 |
| E | 3.60 | 3.80 | 0.142 | 0.150 |
| E1 | 2.60 | 2.90 | 0.102 | 0.114 |
| L | 0.50 | 0.85 | 0.020 | 0.033 |

SUGGESTED PAD LAYOUT

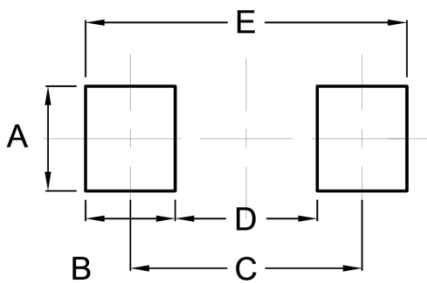

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.40 | 0.055 |
| B | 1.20 | 0.047 |
| C | 3.10 | 0.122 |
| D | 1.90 | 0.075 |
| E | 4.30 | 0.169 |

MARKING DIAGRAM



P/N = Marking Code
 YW = Date Code
 F = Factory Code