

## 200W, 5V - 100V Surface Mount Transient Voltage Suppressor

### FEATURES

- Photo Glass passivated junction
- Low power loss, high efficiency
- Ideal for automated placement
- Excellent clamping capability
- Typical  $I_R$  less than  $1\mu A$  above 10V
- Meets ISO 7637-2 (Pulse 1/2a/2b/3a/3b)
- 200 watts peak pulse power capability with a 10/1000 $\mu s$  waveform ( $V_{WM} \geq 60V$ ,  $P_{PPM} = 175W$ )
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$V_{WM}$	5 - 100	V
$V_{BR}$ (uni-directional)	6.8 - 117	V
$P_{PPM}$	200	W
$T_{JMAX}$	175	°C
Package	SOD-123W	
Configuration	Single die	



### APPLICATIONS

- Protect sensitive circuit from damage by high voltage transients
- Lighting, ESD transient voltage protection of IC, system
- Inductive switching load protection of IC, system
- Electrical Fast Transient Immunity protection of IC, system

### MECHANICAL DATA

- Case: SOD-123W
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.016g (approximately)



SOD-123W



### ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Non-repetitive peak impulse power dissipation with 10/1000 $\mu s$ waveform <sup>(1)</sup>	$P_{PPM}$	200	W
Steady state power dissipation at $T_L = 25^\circ C$ <sup>(2)</sup>	$P_{tot}$	1	W
Forward Voltage @ $I_F = 12A$ for Uni-directional only <sup>(3)</sup>	$V_F$	3.5	V
Junction temperature	$T_J$	-55 to +175	°C
Storage temperature	$T_{STG}$	-55 to +175	°C

#### Notes:

1. Non-repetitive Current Pulse Per Fig.3 and derated above  $T_A = 25^\circ C$  Per Fig.2
2. Units mounted on PCB (5mm x 5mm Cu pad test board)
3. Pulse test with  $PW = 0.3ms$

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	33	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	100	°C/W
Junction-to-case thermal resistance	$R_{\theta JC}$	34	°C/W

**Thermal Performance Note:** Units mounted on PCB (5mm x 5mm Cu pad test board)

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE<sup>(1)</sup></b>	<b>PACKAGE</b>	<b>PACKING</b>
SMFxA	SOD-123W	10,000 / Tape & Reel

**Notes:**

1. “x” defines voltage from 5V (SMF5.0A) to 100V (SMF100A)

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)								
Part number	Marking code	Breakdown voltage $V_{BR}@I_T$ (V) (Note 1)		Test current $I_T$ (mA)	Working stand-off voltage $V_{WM}$ (V)	Maximum reverse leakage current $I_R@V_{WM}$ ( $\mu\text{A}$ ) (Note 1)	Maximum peak impulse current $I_{PPM}$ (A) $t_p = 10/1000\mu\text{s}$	Maximum clamping voltage $V_C@I_{PPM}$ (V) $t_p = 10/1000\mu\text{s}$
		Min	Max					
SMF5.0A	2W5P0	6.4	7.0	10	5	800	21.7	9.2
SMF6.0A	2W6P0	6.67	7.37	10	6	800	19.4	10.3
SMF6.5A	2W6P5	7.22	7.98	10	6.5	500	17.9	11.2
SMF7.0A	2W7P0	7.78	8.6	10	7.0	200	16.7	12.0
SMF7.5A	2W7P5	8.33	9.21	1	7.5	100	15.5	12.9
SMF8.0A	2W8P0	8.89	9.83	1	8.0	50	14.7	13.6
SMF8.5A	2W8P5	9.44	10.5	1	8.5	10	13.9	14.4
SMF9.0A	2W9P0	10.0	11.1	1	9.0	5	13.0	15.4
SMF10A	2W010	11.1	12.3	1	10	5	11.8	17.0
SMF11A	2W011	12.2	13.5	1	11	1	11.0	18.2
SMF12A	2W012	13.3	14.7	1	12	1	10.1	19.9
SMF13A	2W013	14.4	15.9	1	13	1	9.3	21.5
SMF14A	2W014	15.6	17.2	1	14	1	8.6	23.2
SMF15A	2W015	16.7	18.5	1	15	1	8.2	24.4
SMF16A	2W016	17.8	19.7	1	16	1	7.7	26.0
SMF17A	2W017	18.9	20.9	1	17	1	7.2	27.6
SMF18A	2W018	20.0	22.1	1	18	1	6.8	29.2
SMF20A	2W020	22.2	24.5	1	20	1	6.2	32.4
SMF22A	2W022	24.4	26.9	1	22	1	5.6	35.5
SMF24A	2W024	26.7	29.5	1	24	1	5.1	38.9
SMF26A	2W026	28.9	31.9	1	26	1	4.8	42.1
SMF28A	2W028	31.1	34.4	1	28	1	4.4	45.4
SMF30A	2W030	33.3	36.8	1	30	1	4.1	48.4
SMF33A	2W033	36.7	40.6	1	33	1	3.8	53.3
SMF36A	2W036	40.0	44.2	1	36	1	3.4	58.1
SMF40A	2W040	44.4	49.1	1	40	1	3.1	64.5
SMF43A	2W043	47.8	52.8	1	43	1	2.9	69.4
SMF45A	2W045	50.0	55.3	1	45	1	2.8	72.7
SMF48A	2W048	53.3	58.9	1	48	1	2.6	77.4
SMF51A	2W051	56.7	62.7	1	51	1	2.4	82.4
SMF54A	2W054	60.0	66.3	1	54	1	2.3	87.1
SMF58A	2W058	64.4	71.2	1	58	1	2.1	95
SMF60A	2W060	66.7	73.7	1	60	1	1.8	96.8
SMF64A	2W064	71.1	78.6	1	64	1	1.7	103
SMF70A	2W070	77.8	86	1	70	1	1.55	113
SMF75A	2W075	83.3	92.1	1	75	1	1.45	121
SMF78A	2W078	86.7	95.8	1	78	1	1.4	126
SMF85A	2W085	94.4	104	1	85	1	1.3	137
SMF90A	2W090	100	111	1	90	1	1.2	146
SMF100A	2W100	111	123	1	100	1	1.08	162


**Notes:**

1. Pulse test with PW = 30ms


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Pulse Power or Current vs. Initial Junction Temperature**

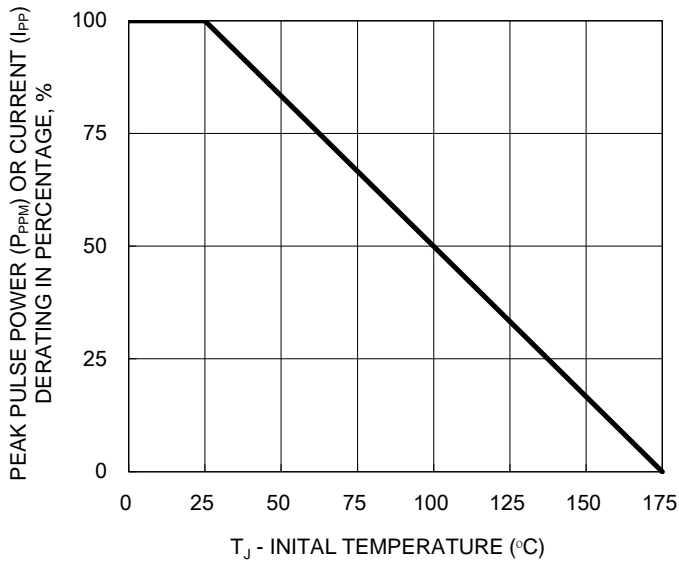


**Fig.2 Steady State Power Derating**

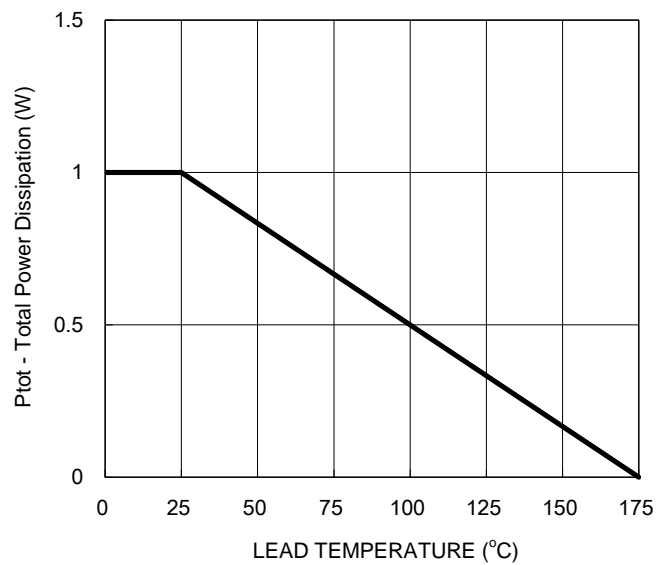


**Fig.3 Clamping Power Pulse Waveform**

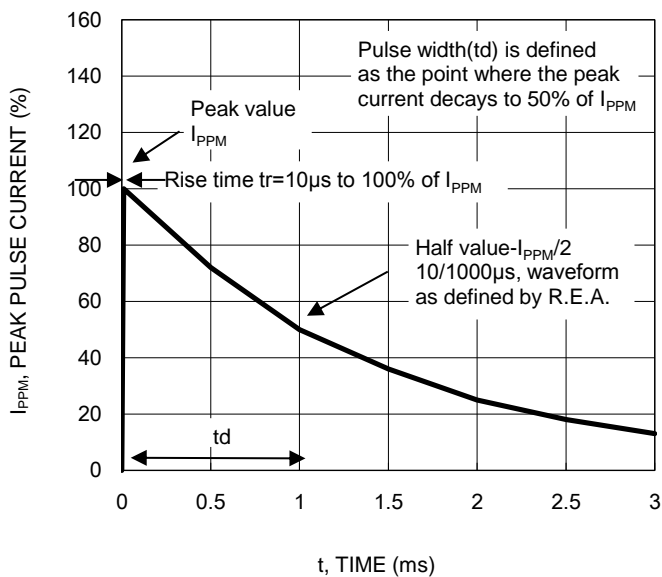

**Fig.4 Typical Junction Capacitance**

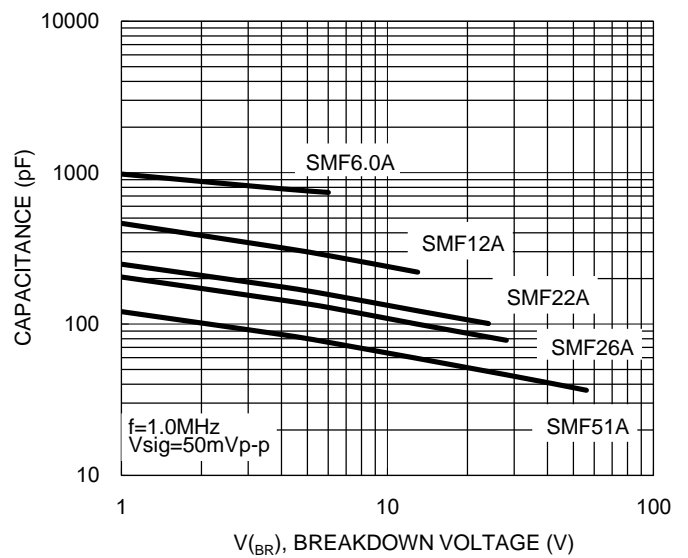


**PACKAGE OUTLINE DIMENSIONS**

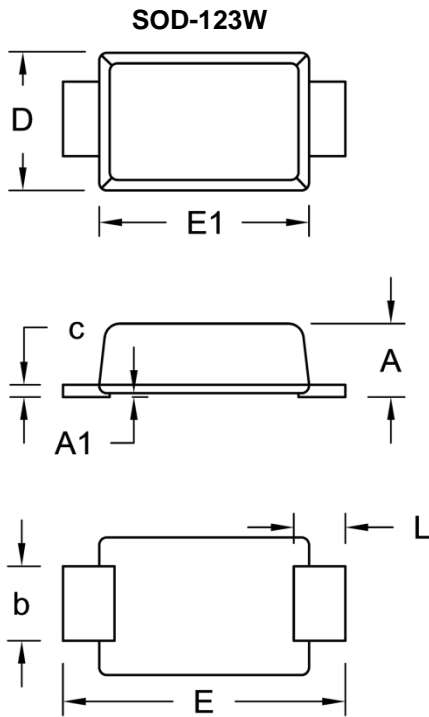

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.90	1.02	0.035	0.040
A1	0.00	0.10	0.000	0.004
b	0.90	1.05	0.035	0.041
c	0.10	0.22	0.004	0.009
D	1.70	1.90	0.067	0.075
E	3.60	3.80	0.142	0.150
E1	2.60	2.90	0.102	0.114
L	0.50	0.85	0.020	0.033

**SUGGESTED PAD LAYOUT**

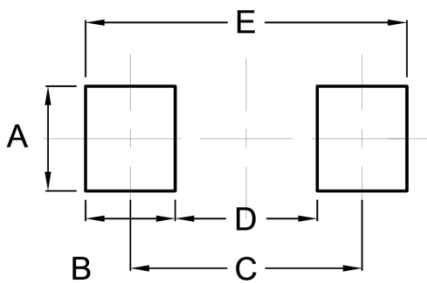

Symbol	Unit (mm)	Unit (inch)
A	1.40	0.055
B	1.20	0.047
C	3.10	0.122
D	1.90	0.075
E	4.30	0.169

**MARKING DIAGRAM**



P/N = Marking Code  
 YW = Date Code  
 F = Factory Code