




TOP VIEW



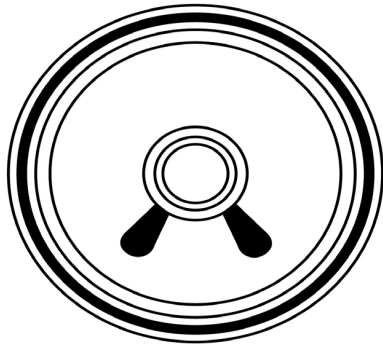

SIDE VIEW

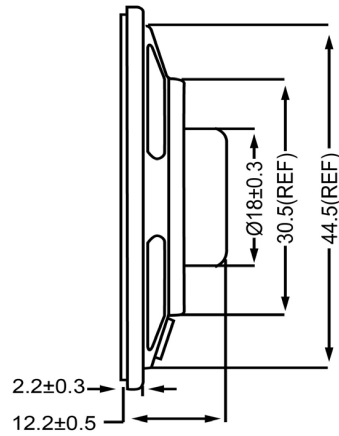

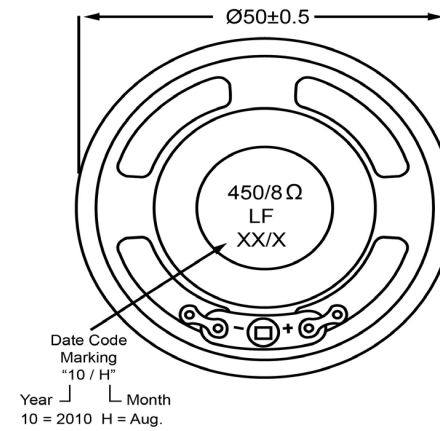BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		2/5/2014	J.S			
Resonant Frequency	450	(Hz)									
Frequency Range	450 ~ 5,000	(Hz)									
SPL @ 10cm	85	(dBA)									
Impedance	8	(Ohm)									
Cone Material	Paper										
Nominal Power	1	(W)									
Max Power	1.5	(W)									
Mount Type	Flush Mount										
Operating Temperature	- 20 ~ + 60	°C									
Storage Temperature	- 20 ~ + 60	°C									
Weight	14.8	(g)									
 DB UNLIMITED			 DB UNLIMITED			Dynamic Speaker			SP500408-1		
						Drawn by: G.W. Date: 10/31/2013 Checked by: C.E. Date: 10/21/2013 Approved by: J.S Date: 2/5/2014					

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.