

SPO™ Low Loss, Low PIM Coaxial Cables

Flexible, Low PIM, Jumper Cables

- -160dBc PIM for optimal system performance
- Super flexible for ease of installation
- Corrugated copper outer conductor providing greater than 100dB Shielding
- Durable black polyethelene outer jacket suitable for outdoor use

Low PIM

Major Carrier Approved!


ISO 9001 Certified



SPO-250, SPO-375, SPO-500 50 Ohm low loss, low PIM cable assemblies


- Available in any required connector configuration and length
- Large selection of standard configurations for quick delivery
- Check inventory at StockCheck on our website
- 100% tested for static and dynamic PIM, VSWR and insertion loss
- Serial marker band includes PIM, VSWR and IL test data which is retained and accessible on the Times website
- 10 year Times Microwave warranty

Typical VSWR

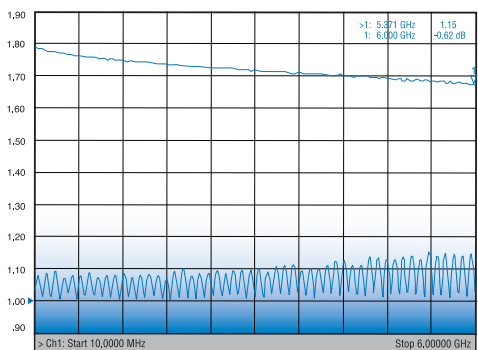


SPO250NMNM1.0M

Dynamic PIM Test Results

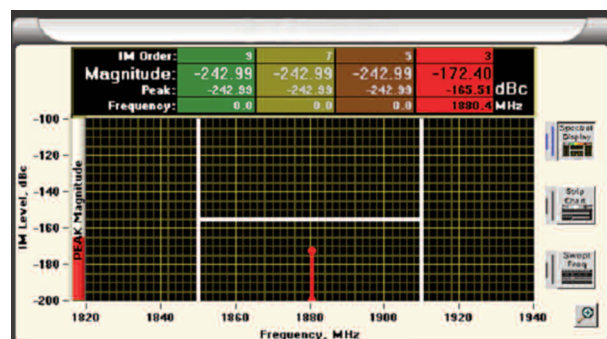

SPO™ Coaxial Cables

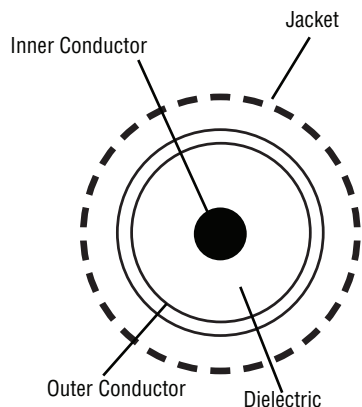

Cable Construction

Inner Conductor:

- SPO-250: Solid bare copper
- SPO-375: BCCAL
- SPO-500: BCCAL

Dielectric: Foam Polyethylene

Outer Conductor: Seam welded corrugated copper tube


Jacket: UV and sunlight resistant black polyethylene

Physical Specifications	SPO-250		SPO-375		SPO-500	
Jacket: Extruded Polyethylene; OD: in(mm)	0.300	(7.7)	0.425	(10.8)	0.525	(13.4)
Outer Conductor: Corrugated Copper Tube; OD: in(mm)	0.250	(6.3)	0.380	(9.6)	0.472	(12.1)
Dielectric: Foam PE; OD: in(mm)	0.190	(4.8)	0.285	(7.1)	0.370	(9.4)
Center Conductor: Solid BCCAL; OD: in(mm)	0.075	(1.9)	0.110	(2.8)	0.142	(3.6)
Bend Radius: in(mm)	1.0	(25)	1.7	(2.3)	2.0	(51)
Bending Moment: ft-lbs (N-m)	1.84	(2.5)	2.07	(2.8)	3.25	(4.4)
Tensile Strength: lb (kg)	150	(68.2)	175	(79.5)	210	(95.5)
Flat Plate Crush Strength: lb/in (kg/mm)	100	(1.8)	100	(1.8)	110	(2.0)
Weight: lbs/1000 ft (kg/km)	46	(67)	78	(120)	140	(210)
Environmental Specifications						
Installation Temperature Range °F/°C	-25/+60°C		-25/+60°C		-25/+60°C	
Storage Temperature Range °F/°C	-70/+85°C		-70/+85°C		-70/+85°C	
Operating Temperature Range °F/°C	-40/+85°C		-40/+85°C		-40/+85°C	
Electrical Specifications						
Velocity of Propagation: %	84		84		84	
Impedance: Ohms	50		50		50	
Capacitance: pF/ft (pF/m)	24.2	(79.4)	24.3	(79.7)	25.2	(82.7)
Inductance: μH/ft (uH/m)	0.61	(0.200)	0.61	(0.200)	0.63	(0.205)
Shielding Effectiveness: dB	>100		>100		>100	
Center Conductor DC Resistance: Ohms/1000 ft/(km)	3.00	(9.84)	1.30	(4.26)	0.82	(2.70)
Shield DC Resistance: Ohms/1000 ft (km)	2.00	(6.56)	1.52	(4.98)	1.00	(3.28)
Attenuation & Average Power @ MHz	dB/100 ft (dB/100m) kW		dB/100ft (dB/100m) kW		dB/100ft (dB/100m) kW	
450	4.1	(13.3)	1.01	2.8	(9.1)	2.11
700	5.1	(17.1)	0.81	3.5	(11.5)	1.67
850	5.7	(18.7)	0.73	3.9	(12.8)	1.50
1900	8.9	(29.2)	0.47	6.0	(21.0)	0.97
2100	9.4	(30.8)	0.45	6.4	(21.0)	0.92
2300	9.9	(32.5)	0.43	6.7	(22.0)	0.87
2400	10.1	(33.1)	0.42	6.9	(22.6)	0.85
4900	15.0	(49.2)	0.28	10.5	(34.4)	0.57
5800	16.5	(54.1)	0.26	11.6	(38.0)	0.52
10.9	(35.8)	0.63				
Connectors (solder body) (connectors with BLK suffix packed 100 pieces per bulk pack)						
N Male Straight	TC-SPO250-NM-LP (3190-6053BLK)		TC-SPO375-NM-LP (3190-6059BLK)		TC-SPO500-NM-LP (3190-6004BLK)	
N Male Right Angle	TC-SPO250-NM-RA-LP (3190-6055BLK)		TC-SPO375-NM-RA (3190-6061BLK)		TC-SPO500-NM-RA-LP (3190-6065BLK)	
N Female	TC-SPO250-NF-LP (3190-6054BLK)		TC-SPO375-NF-LP (3190-6060BLK)		TC-SPO500-NF-LP (3190-6005BLK)	
7-16 DIN Male Straight	TC-SPO250-716M-LP (3190-6056BLK)		TC-SPO375-716M-LP (3190-6062BLK)		TC-SPO500-716M-LP (3190-6066BLK)	
7-16 DIN Male Right Angle	TC-SPO250-716M-RA-LP (3190-6058BLK)		TC-SPO375-716M-RA-LP (3190-6064BLK)		TC-SPO375-716M-RA-LP (3190-6068BLK)	
7-16 DIN Female Straight	TC-SPO250-716-F-LP (3190-6057BLK)		TC-SPO375-716F-LP (3190-6063BLK)		TC-SPO500-716F-LP 3190-6067BLK	
SMA Male Straight	TC-SPP250-SM-LP (3190-6182BLK)		N/A		N/A	

- Jumpers available in any length with most popular connector combinations
- iBwave VEX files available at www.iBwave.com

SPO™ Coaxial Cables

Smart Part Number Key for Low PIM Jumpers

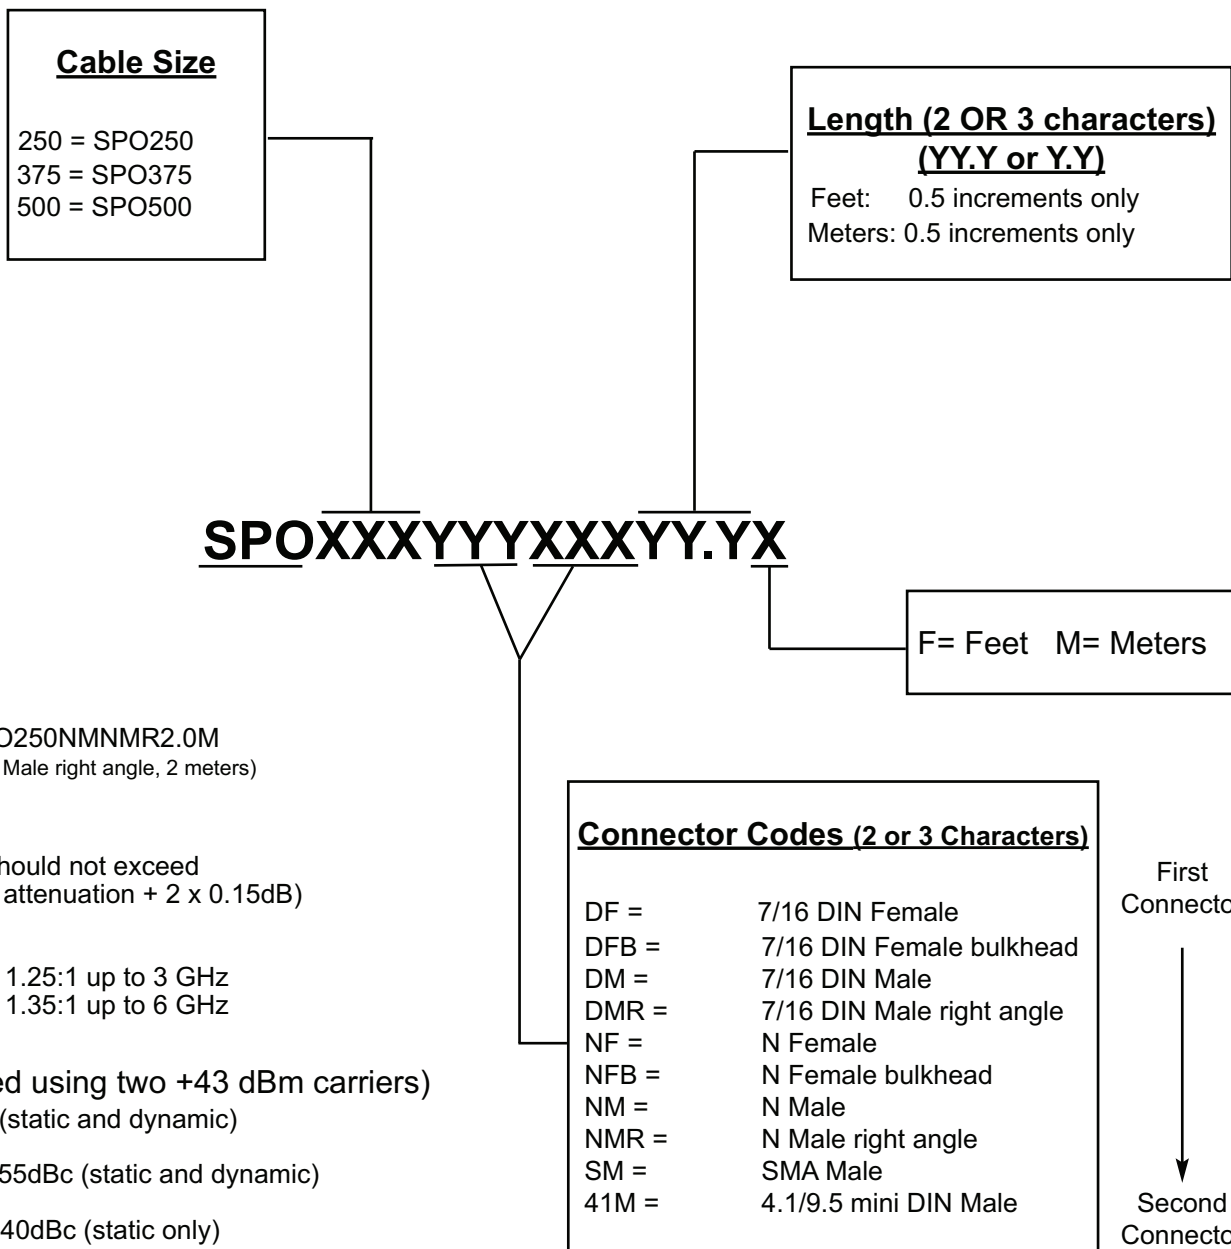

Electrical:

- Insertion Loss should not exceed (1.1 x published attenuation + 2 x 0.15dB)
- VSWR
Maximum of 1.25:1 up to 3 GHz
Maximum of 1.35:1 up to 6 GHz

PIM: (measured using two +43 dBm carriers)

- IM₃: < -160dBc (static and dynamic)
- IM₃: SMA's < -155dBc (static and dynamic)
- IM₃: QMA's < -140dBc (static only)

**Many assembly configurations are available from stock.
Refer to the on-line [StockCheck](#) for specific configurations.**