


SQF-SLM 650

SATA III (6.0Gb) Half Slim SSD

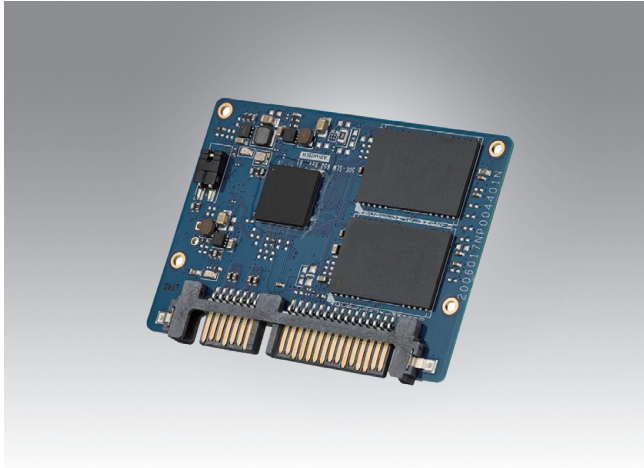

Features

- SATA 3.2 Compliant
- AES-256 Support & TCG-OPAL Compliant
- Support HW Write Protection
- Supports LDPC & RAID ECC
- GUI management tool & software API package
- Multiple Temperature Range Product Selection
- High Endurance sTLC Product Selection



Specifications

Connect Type	Standard 7+15-pin SATA connector
Flash type	3D TLC
Capacity	64GB ~ 1TB
Transfer Mode	SATA III (Up to 6Gb/s)
Max. Power Consumption	Read: 1.35 W, Write: 1.75 W
Sustained R/W Performance (*)	up to 550/ 520 MB/sec
Operating Temperature	Commercial Temperature: 0 to +70 °C Minus Temperature: -20 to +85 °C Extended Temperature: -40 to +85 °C
Shock Resistance	1,500 G, peak / 0.5 ms
Vibration Resistance	20 G, peak / 80 ~ 2000 Hz
Dimensions (mm)	54.0 x 39.0 x 4.0

(*) These values are for reference only; they may change according to the flash memory used.

Ordering Information

PN	Description
SQF-SLMV1-64GSDC	SQF SATA Slim 650-D 64G 3D TLC (BiCS5) (0-70°C)
SQF-SLMV2-128GSDC	SQF SATA Slim 650-D 128G 3D TLC (BiCS5) (0-70°C)
SQF-SLMV2-256GSDC	SQF SATA Slim 650-D 256G 3D TLC (BiCS5) (0-70°C)
SQF-SLMV2-512GSDC	SQF SATA Slim 650-D 512G 3D TLC (BiCS5) (0-70°C)
SQF-SLMV4-1TDSDC	SQF SATA Slim 650-D 1T 3D TLC (BiCS5) (0-70°C)
SQF-SLMV1-64GSDM	SQF SATA Slim 650-D 64G 3D TLC (BiCS5) (-20-85°C)
SQF-SLMV2-128GSDM	SQF SATA Slim 650-D 128G 3D TLC (BiCS5) (-20-85°C)
SQF-SLMV2-256GSDM	SQF SATA Slim 650-D 256G 3D TLC (BiCS5) (-20-85°C)
SQF-SLMV2-512GSDM	SQF SATA Slim 650-D 512G 3D TLC (BiCS5) (-20-85°C)
SQF-SLMV4-1TDSM	SQF SATA Slim 650-D 1T 3D TLC (BiCS5) (-20-85°C)
SQF-SLMV1-64GDSDE	SQF SATA Slim 650-D 64G 3D TLC (BiCS5) (-40-85°C)
SQF-SLMV2-128GDSDE	SQF SATA Slim 650-D 128G 3D TLC (BiCS5) (-40-85°C)
SQF-SLMV2-256GDSDE	SQF SATA Slim 650-D 256G 3D TLC (BiCS5) (-40-85°C)
SQF-SLMV2-512GDSDE	SQF SATA Slim 650-D 512G 3D TLC (BiCS5) (-40-85°C)
SQF-SLMV4-1TDSDE	SQF SATA Slim 650-D 1T 3D TLC (BiCS5) (-40-85°C)