



# SR22W SERIES

## SCHOTTKY BARRIER RECTIFIER



VOLTAGE 20~60 Volt CURRENT 2 Ampere

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications in order to optimize board space
- Low power loss, high efficiency
- High surge capacity
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### MECHANICAL DATA

- Case: SMA(W) molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.002 ounces, 0.068 grams

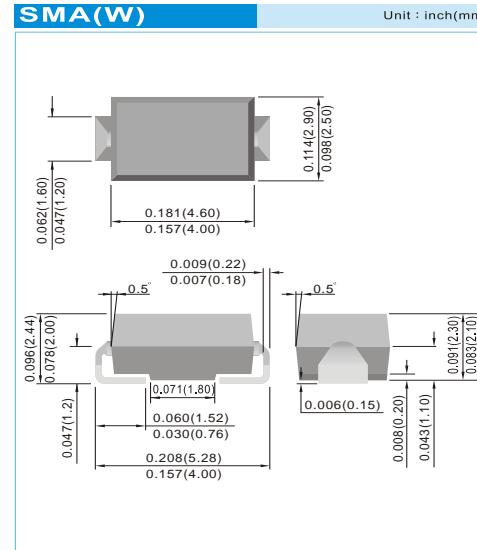

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load.

PARAMETER	SYMBOL	SR22W	SR23W	SR24W	SR26W	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	60	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	42	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	60	V
Maximum Average Forward Current (see Fig.4)	$I_{F(AV)}$	2.0				A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	50				A
Maximum Forward Voltage at 2.0A ( Note 1)	$V_F$	0.5		0.7	V	
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J=25^{\circ}\text{C}$ $T_J=100^{\circ}\text{C}$	$I_R$	0.5 20		0.1 20	mA	
Typical Thermal Resistance ( Note 2)	$R_{\theta JL}$ $R_{\theta JA}$	25 100			$^{\circ}\text{C} / \text{W}$	
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +125		-55 to +150	$^{\circ}\text{C}$	

#### NOTES:

1. Pulse Test with PW =300 $\mu$ sec, 1% Duty Cycle.
2. Mounted on PCB 6x5mm copper pad areas.



## SR22W SERIES

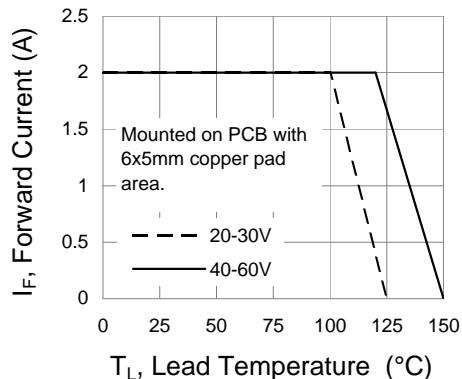


Fig.1 Forward Current Derating Curve

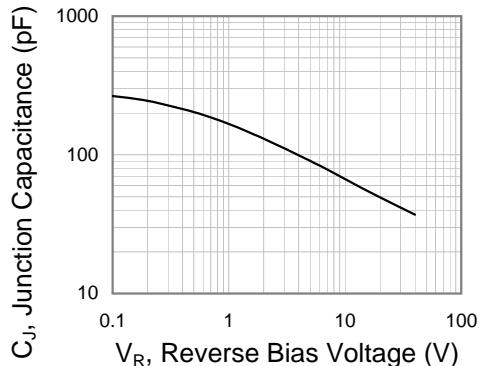


Fig.2 Typical Junction Capacitance

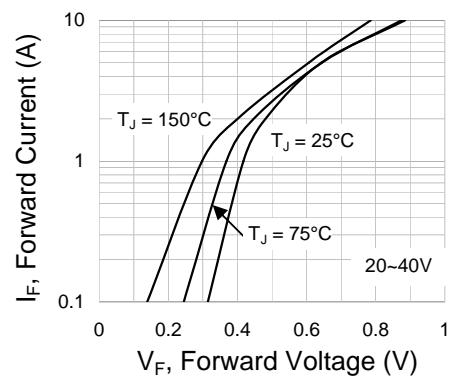


Fig.3 Typical Forward Characteristics

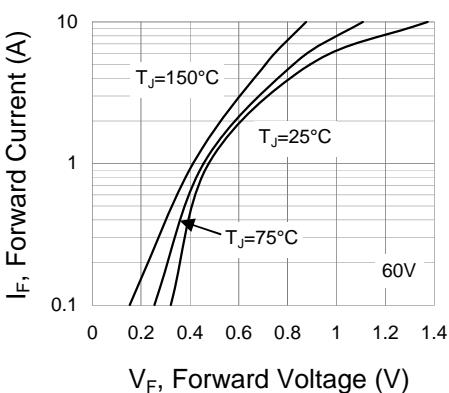


Fig.4 Typical Forward Characteristics

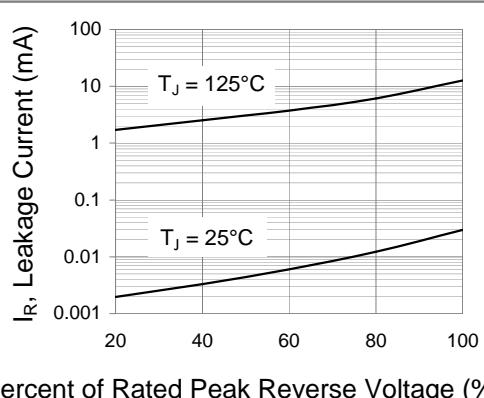


Fig.5 Typical Reverse Characteristics


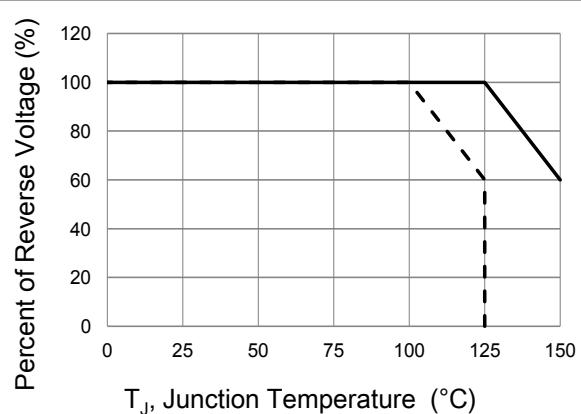


Fig.6 Operating Temperature Derating Curve



## SR22W SERIES

### MOUNTING PAD LAYOUT

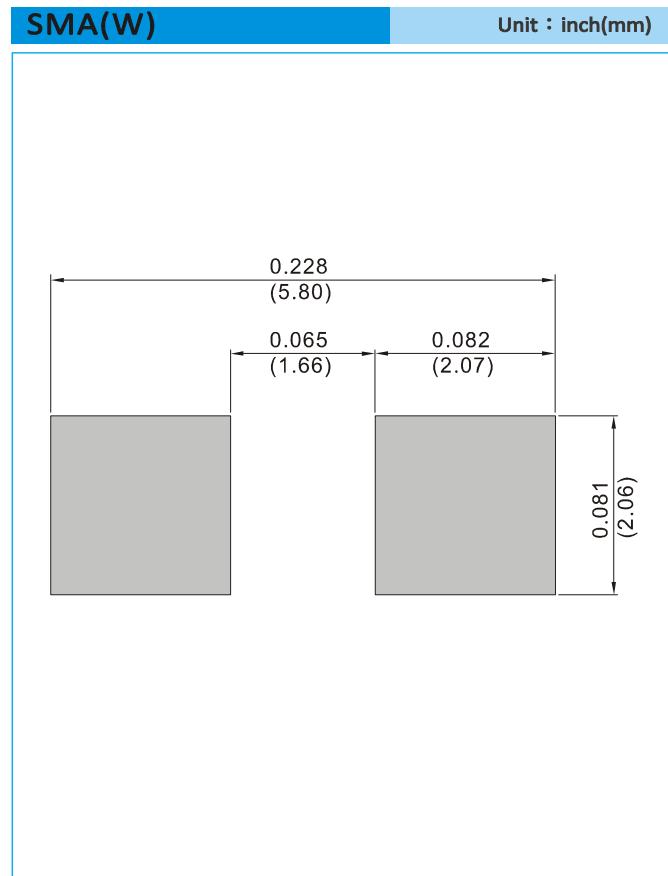

### ORDER INFORMATION

- Packing information
  - T/R - 7.5K per 13" plastic Reel
  - T/R - 1.8K per 7" plastic Reel



## SR22W SERIES

### Part No\_packing code\_Version

SR22W\_R1\_00001

SR22W\_R2\_00001

For example :

**RB500V-40\_R2\_00001**



Packing Code XX				Version Code XXXXX		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			