

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 50 Volts CURRENT 50 Ampere

FEATURES


- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * High switching capability
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: To-247 molded plastic
- * Epoxy: Device has UL flammability classification 94V-0
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 6.10 grams



TO-247

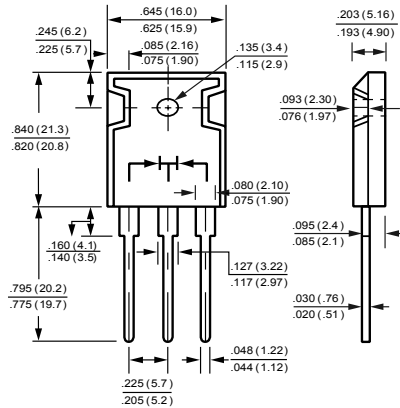

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	SR5020C	SR5030C	SR5035C	SR5040C	SR5045C	SR5050C	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	35	40	45	50	Volts
Maximum RMS Voltage	V_{RMS}	14	21	25	28	32	35	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	35	40	45	50	Volts
Maximum Average Forward Rectified Current at Derating Case Temperature	I_O	50						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	400						Amps
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	1.2						°C/W
	$R_{\theta JA}$	24						
Operating Temperature Range	T_J	150						°C
Storage Temperature Range	T_{STG}	-55 to + 150						°C

ELECTRICAL CHARACTERISTICS (@TA=25 °C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SR5020C	SR5030C	SR5035C	SR5040C	SR5045C	SR5050C	UNITS	
Maximum Instantaneous Forward Voltage at 25.0A DC	V_F	.65						.75	Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	I_R	@ $T_A = 25^\circ C$						1.0	mA
		@ $T_A = 100^\circ C$						10	mA

- NOTES : 1. Thermal Resistance : Heat-sink mounted.
2. Suffix "A" = Common Anode.
3. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

RATING AND CHARACTERISTICS CURVES (SR5020C THRU SR5050C)

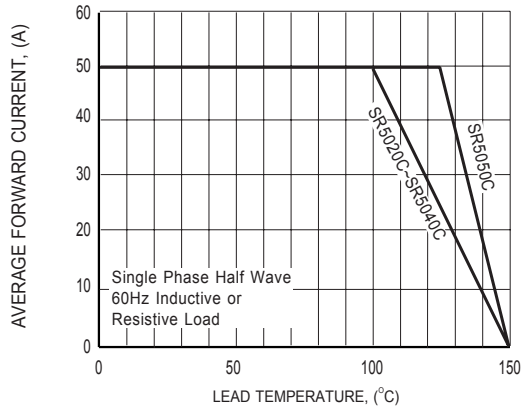


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

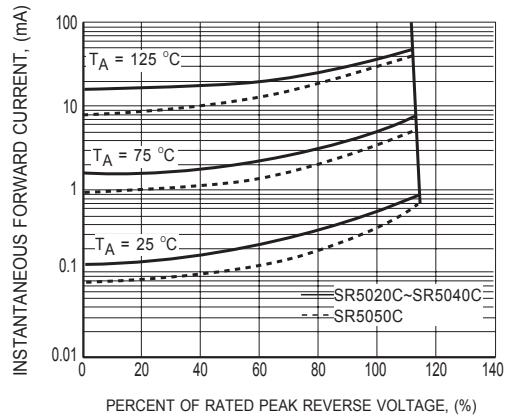


FIG.2 TYPICAL REVERSE CHARACTERISTICS

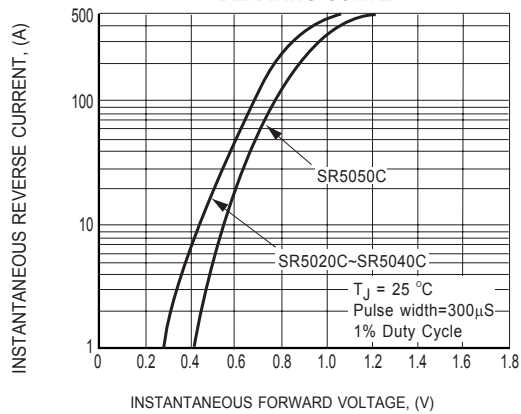


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

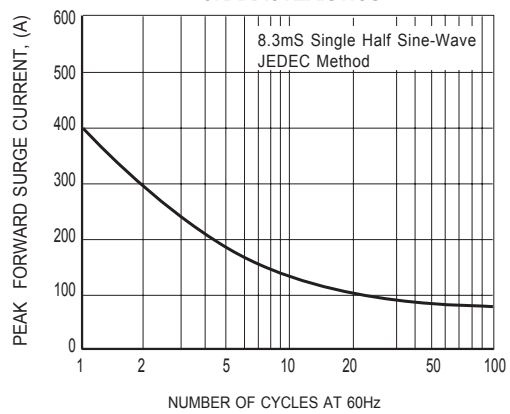


FIG.4 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT