

## Datasheet

## GNSS

### GNSS active antenna

#### Features:

Frequency 1575-1602 MHz  
Polarization RHCP  
LNA Gain 28dB  
Current consumption 10-15mA  
Cable RG-174 with SMA

#### Applications:

- GPS & Glonass
- Navigation
- Location Based Services
- Fleet management



**GNSS Antenna**



## Electrical Specifications

### Antenna Characteristics

Frequency (MHz)	1575.42 ± 3	1602 ± 8
Return Loss (dB)	< -10	< -10
Gain (dBi) @Zenith (28mm × 28mm GND)	-0.5	2.5
Polarization	RHCP	RHCP

## LNA Characteristics

Frequency (MHz)	1575.42 ± 3	1602 ± 8
Gain (dB)	28 ± 3	
Noise Figure (dB) @3.0V	1.5 Typ.	
Current Consumption (mA) @3.0V	10~15	
Operation Voltage (V)	2.7~5.0	
Output Impedance (Ω)	50	
ESD (kV)	2.5 HBM	

## Total Characteristics

Frequency (MHz)	1575.42 ± 3	1602 ± 8
Gain (dB) at Zenith	27.5 ± 3 – (Cable Loss)	30.5 ± 3 – (Cable Loss)
Output Impedance (Ω)	50	
VSWR	2.0 Max.	

\*Note : Cable Loss : 1.4 dB/M (Max.)

**Mechanical Specifications**

**Environmental**



Temperature Range (°C)	-40 to 85
Humidity	Non-condensing 65°C 95% RH
IP Rating	IPX7

RoHS Compliant

Part Number	Length (mm)	Weight (g)	Connector Type	Cable Type	Radome
ST0326-41-001-A	50	62.7	SMA	RG-174	ABS


**Mechanical Drawing**

Unit : mm

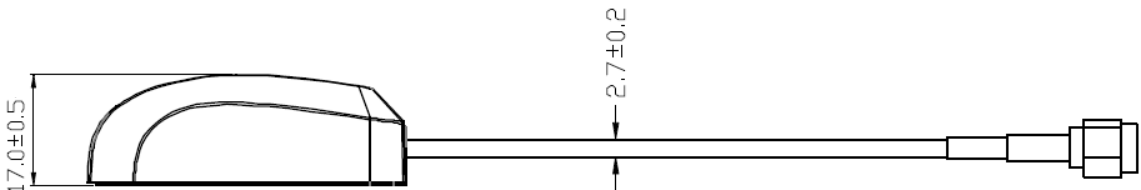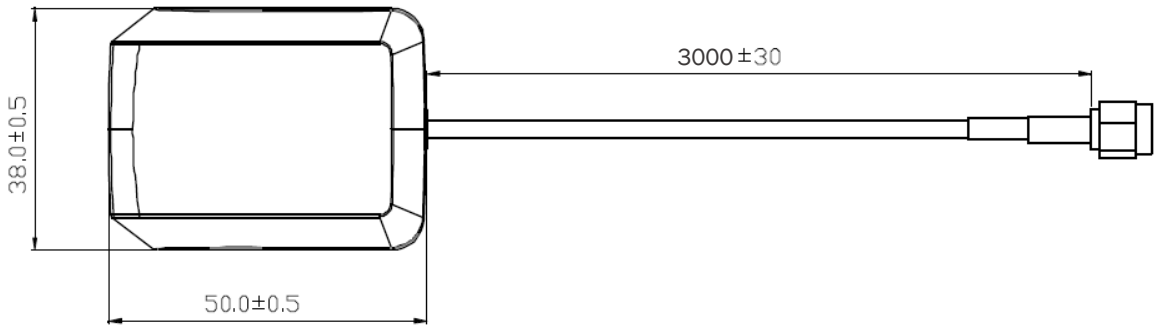


ST0326-41-001-A

## Antenna Return Loss

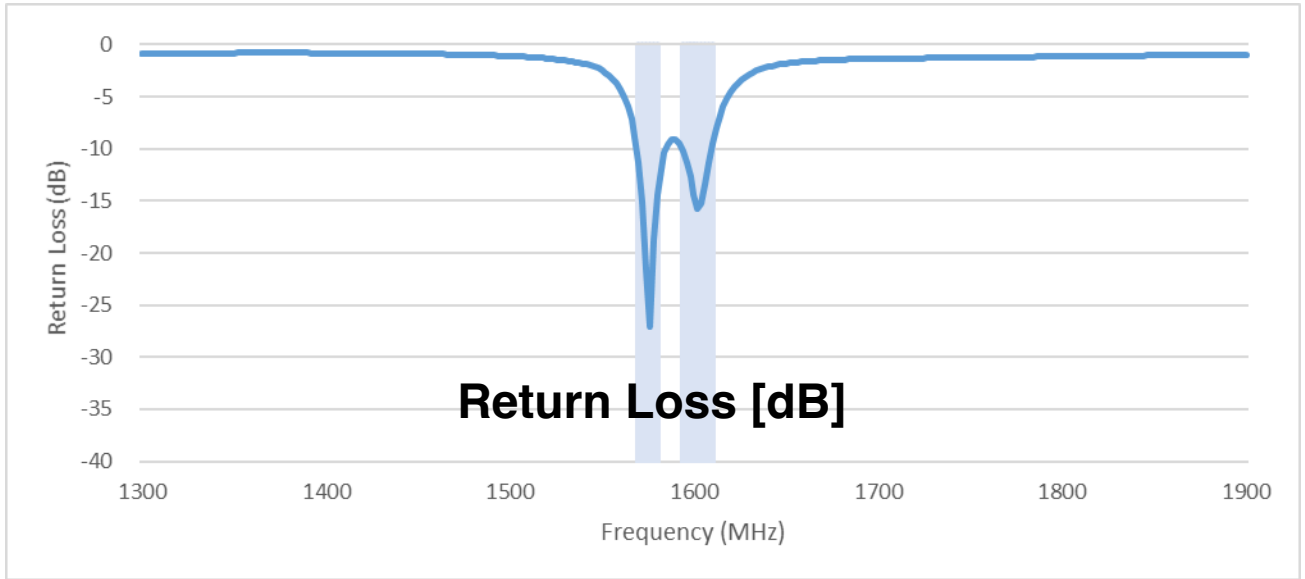

Blue background represents frequency response.

## LNA Gain

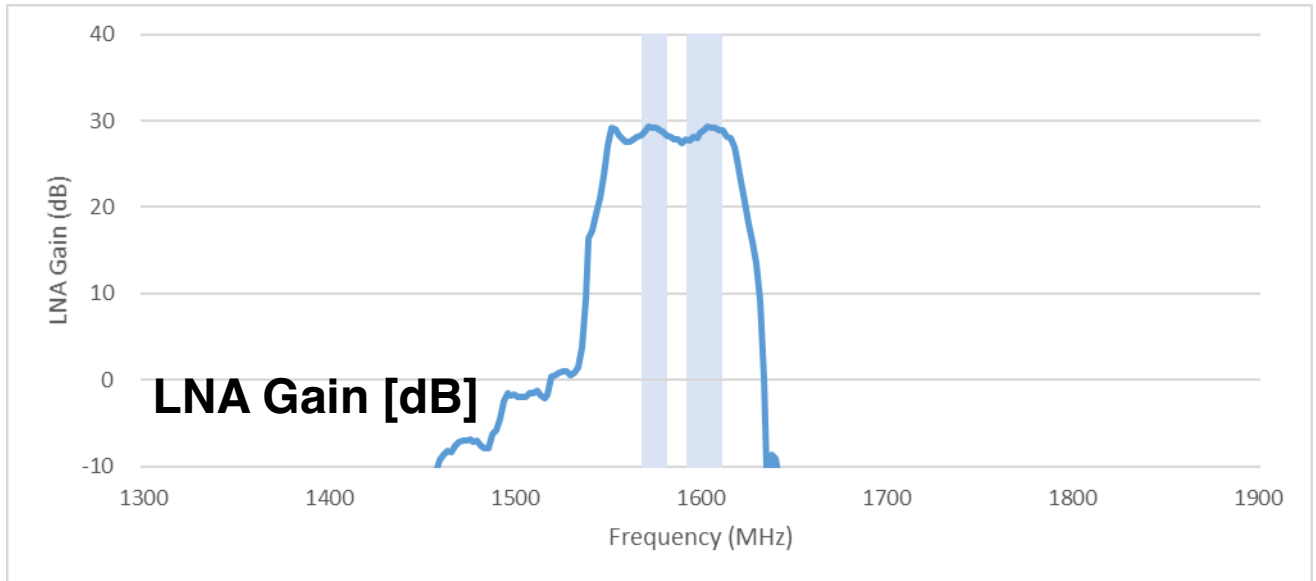

Blue background represents frequency response.