

Datasheet

0.69-0.96GHz & 1.7-5GHz

Internal Antenna



90 × 15 × 0.85mm

PCB Antenna

Features:

High performing full 4G LTE / 5G NR band antenna with coaxial cable OD1.37mm for indoor applications.

Applications:

- CPE - Router, Set-top boxes & Gateway
- IoT devices
- 4G LTE & 5G NR Mesh
- Smart Metering
- Robotics



Electrical Specifications

Antenna Characteristics

Antenna Type	Radiation Pattern	Polarization	Max. Input Power	Impedance
PCB Antenna	Omni	Linear	1W	50Ω
Frequency (GHz)	0.698~0.96	1.71~2.17	2.3~2.69	3.3~5
Return Loss (dB)	< -6	< -6	< -6	< -6
Peak Gain (dBi)	4.2	2.1	3.3	4.2
Average Gain (dB)	-3.0	-3.1	-2.6	-3.0
Average Efficiency (%)	50	49	55	51

Mechanical Specifications

Environmental


Temperature Range (°C)	-40 to 85
Humidity	Non-condensing 65°C 95% RH

RoHS Compliant

Part Number	Dim. (mm)	Weight (g)	Conn. Type	Cable Type	Material	Adhesive
ST0425-20-401-A	90 × 15 × 0.85	3.6	I-PEX MHF 1	Ø 1.37	FR-4	3M 467


Mechanical Drawing

Unit : mm

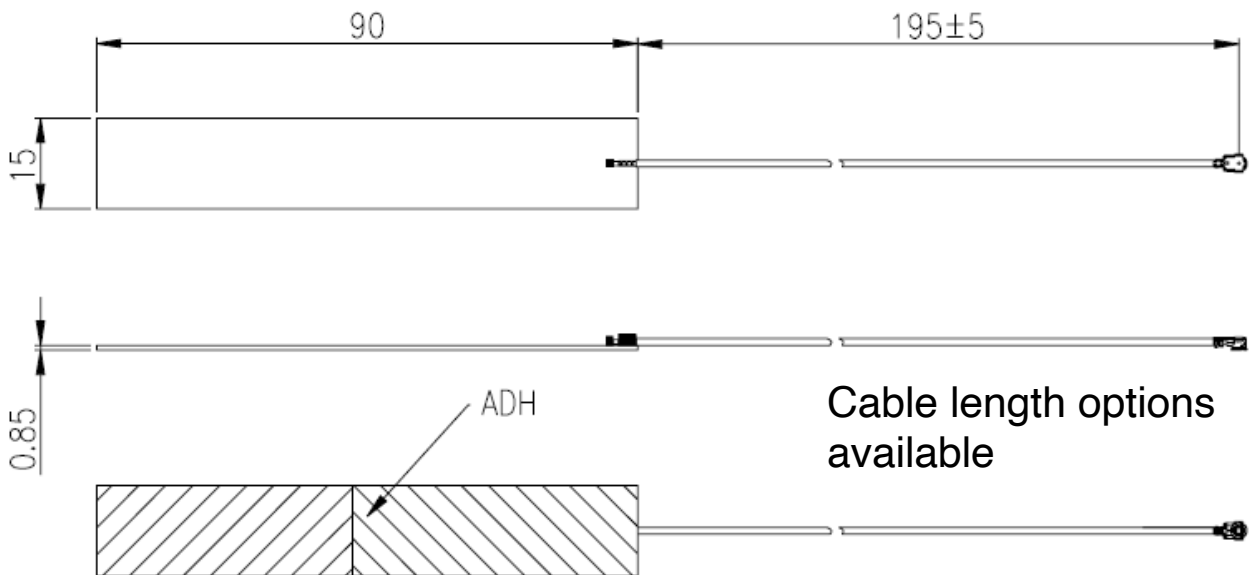


ST0425-20-401-A


Charts In Free Space

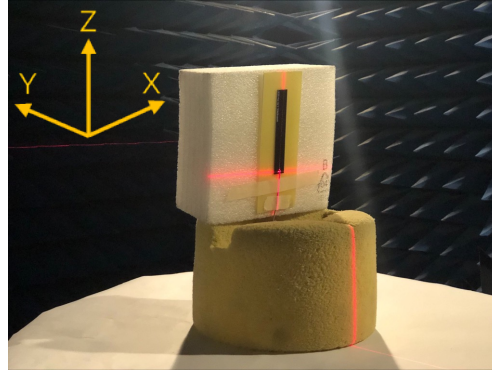

Test setup, measurement performed in 3D anechoic chamber.



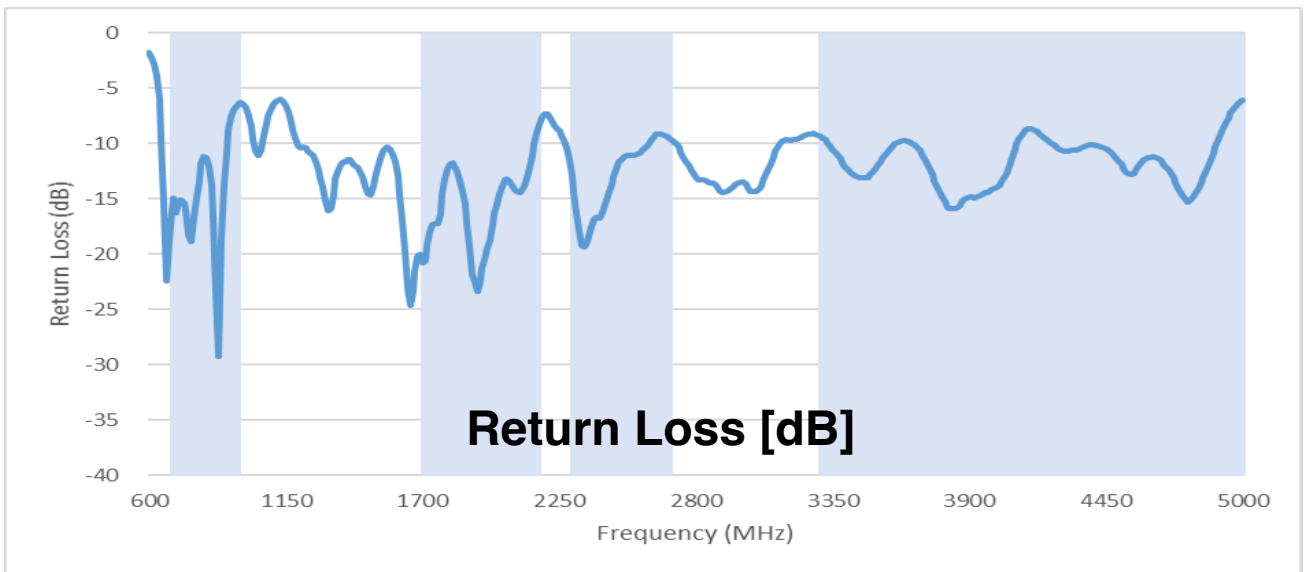


Blue background represents frequency response.



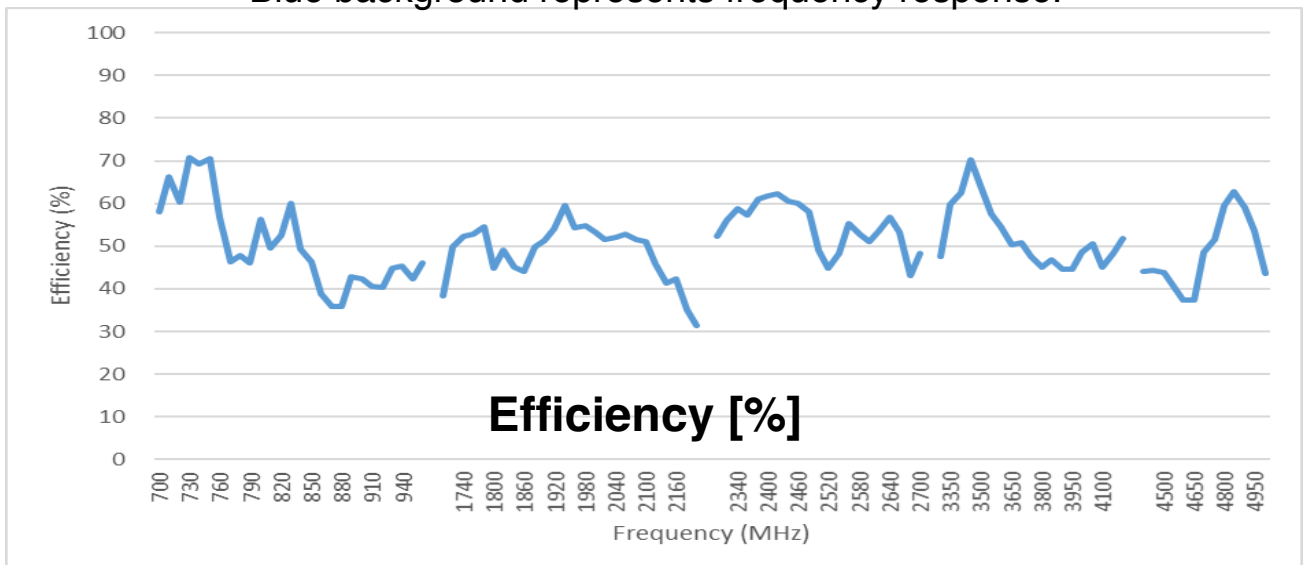


Radiation Pattern - Free Space

XY - Plane

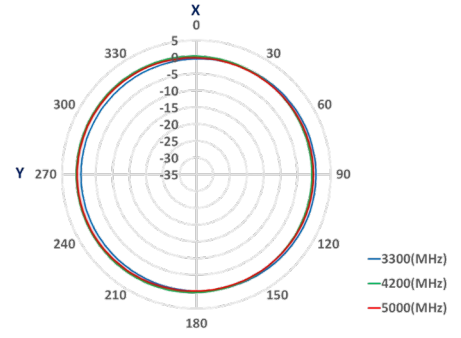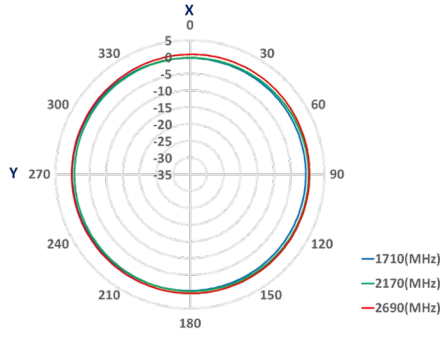

YZ - Plane

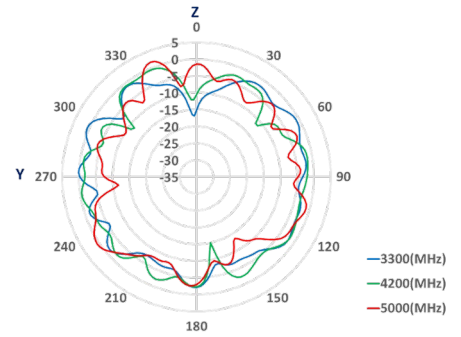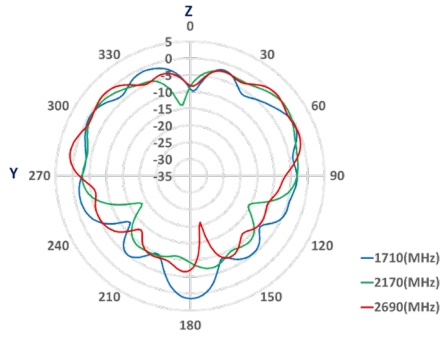

XZ - Plane

