

Datasheet

2.4-2.5GHz & 5.15-7.2GHz Internal Antenna



50.4 × 13.8 × 0.7mm

PCB Antenna

Features:

Wi-Fi 6E, also including Wi-Fi 6E new 6GHz band, Bluetooth, ZigBee
Adhesive backing on the PCB simplifies mounting within the device
Global frequency coverage

Applications:

Smart metering and utilities
Industrial IoT
Quick service restaurants
Medical devices



Electrical Specifications

Antenna Characteristics

Antenna Type	Radiation Pattern	Polarization	Max. Input Power	Impedance
PCB Antenna	Omni	Linear	1W	50Ω

Frequency (GHz)	2.4~2.5	5.15~5.825	5.925~7.125
Return Loss (dB)	< -10	< -10	< -10
Peak Gain (dBi)	3.4	4.0	4.2
Average Gain (dB)	-1.7	-1.8	-1.6
Average Efficiency (%)	68	67	70

Mechanical Specifications

Environmental


Temperature Range (°C)	-40 to 65
Humidity	Non-condensing 65°C 95% RH

RoHS Compliant


Part Number	Dimension (mm)	Weight (g)	Conn. Type	Cable Type	Material	Adhesive
ST1225-20-001-A	50.4 × 13.8 × 0.7	1.8	I-PEX MHF 1	Ø 1.13	FR-4	Sony G9000

Mechanical Drawing

Unit : mm

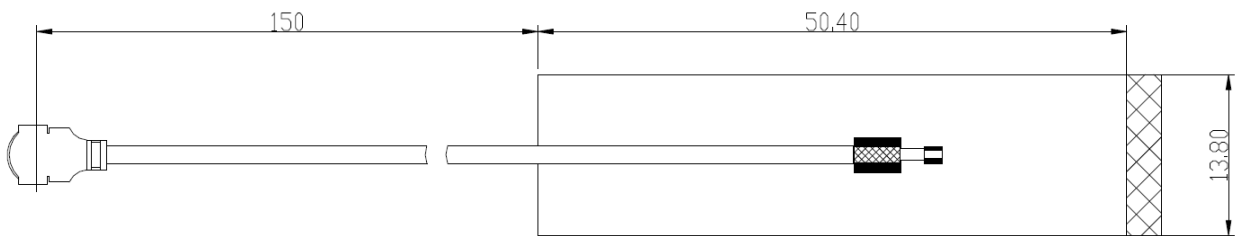


Cable length options available

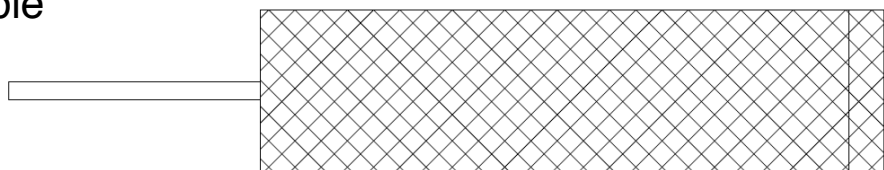


ST1225-20-001-A


Charts In Free Space

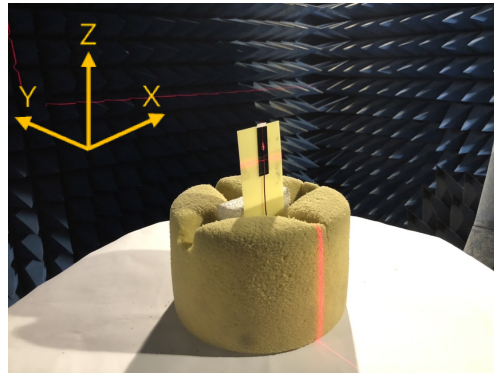

Test setup, measurement performed in 3D anechoic chamber.

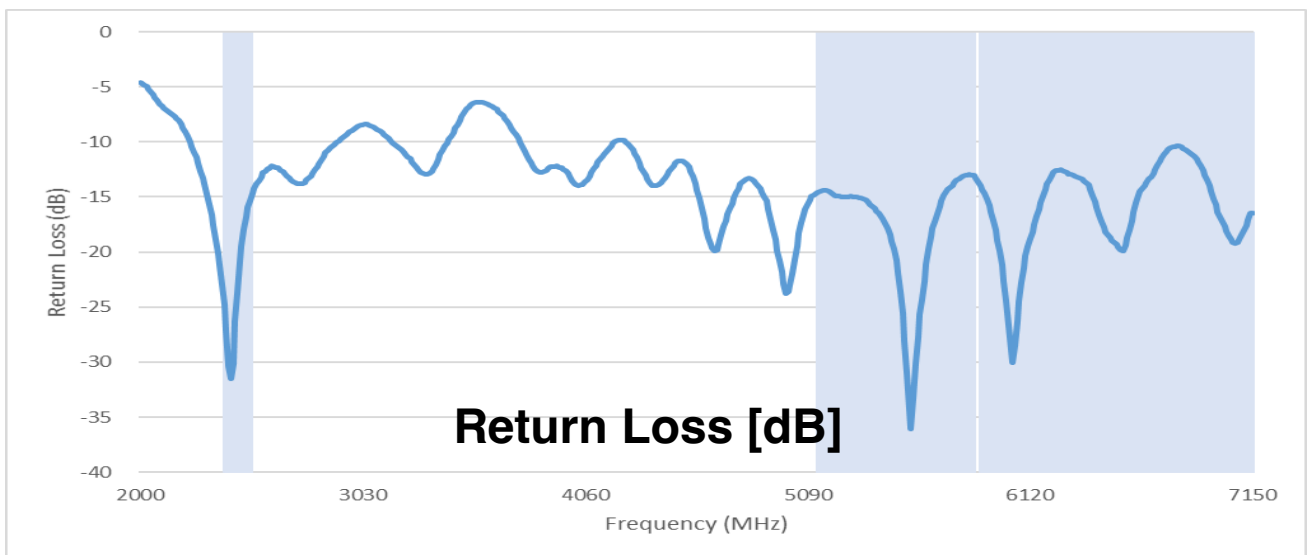


Blue background represents frequency response.

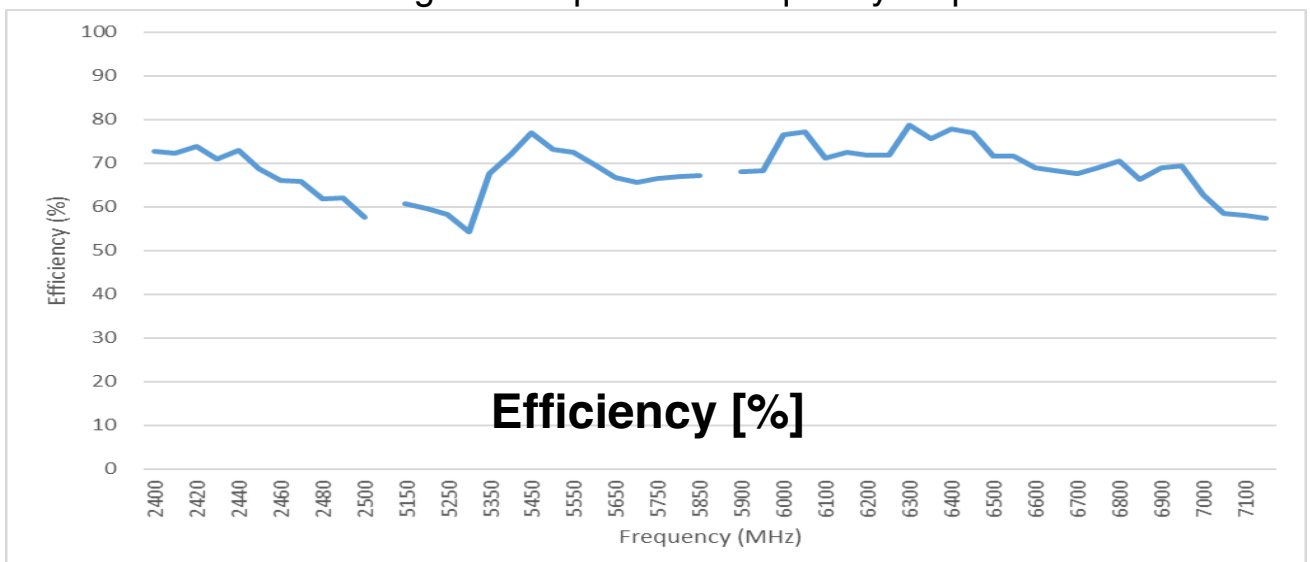


Radiation Pattern - Free Space

XY - Plane

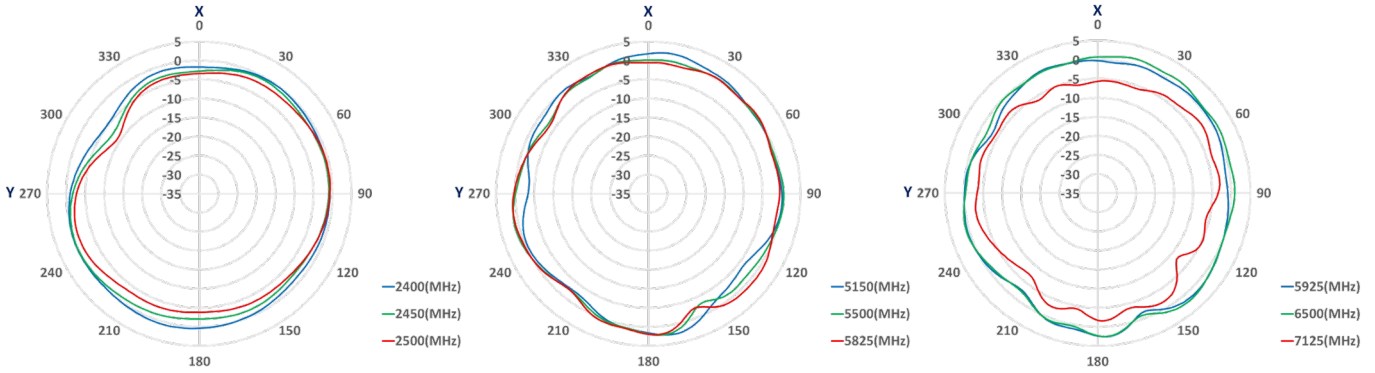

YZ - Plane

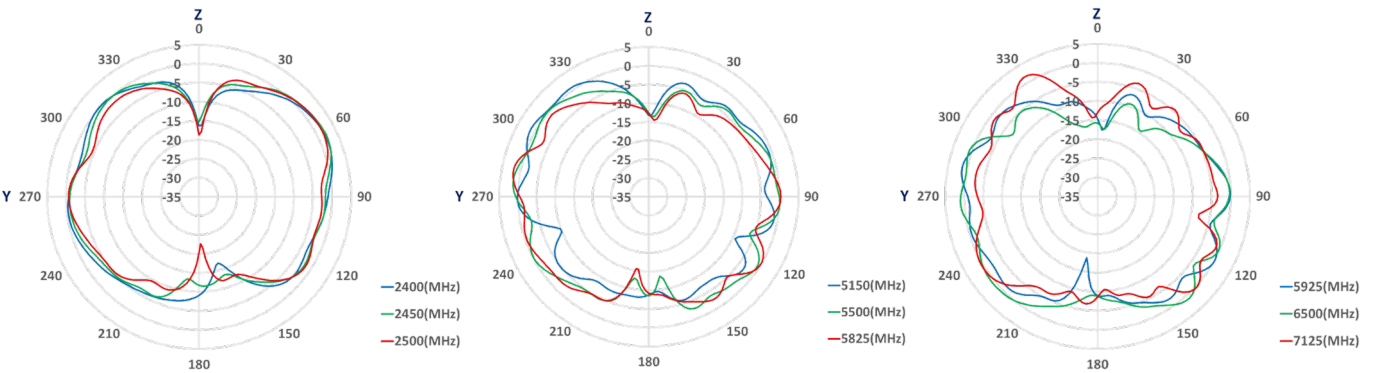

XZ - Plane

