

# STN101050BL25

## TVS Diode ESD suppressor



### Product features

- Protects one bi-directional I/O line
- Low clamping voltage
- Low operating voltage: 5.0 V
- Low leakage current
- Ultra low capacitance
- Meets moisture sensitivity level (MSL) 3
- Molding compound flammability rating: UL 94V-0
- Termination finish: Ni/Pd/Au

### Applications


- USB ports
- Display port
- Desktops, servers and notebooks
- Digital visual interface (DVI)
- Cellular phones
- High definition multi-media interface (HDMI)

### Environmental compliance and general specifications

- IEC61000-4-2 (ESD)
  - ±25 kV (air)
  - ±25 kV (contact)
- IEC61000-4-5 (Lightning) 5 A (8/20 µs)




### Ordering part number

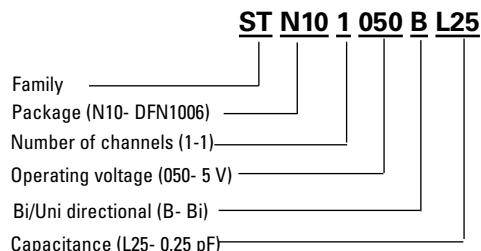

### Pin out/functional diagram



DFN1006-2L

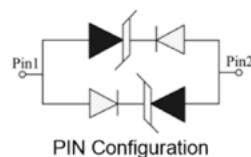

### Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

#### STN101050BL25

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 8/20 $\mu$ s waveform	P <sub>pp</sub>	60	W
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	+/-25	kV
ESD per IEC 61000-4-2 (Contact)		+/-25	
Lead soldering temperature	T <sub>L</sub>	+260 (10 seconds)	°C
Operating junction temperature range	T <sub>J</sub>	-55 to +125	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C


### Electrical characteristics

(+25 °C)

#### STN101050BL25


Parameter	Test condition	Minimum	Typical	Maximum	Symbol (Units)
Reverse working voltage	-	-	-	5.0	V <sub>RWM</sub> (V)
Reverse breakdown voltage	I <sub>T</sub> = 1 mA	6.0	-	-	V <sub>BR</sub> (V)
Reverse leakage current	V <sub>RWM</sub> = 5 V	-	-	0.1	I <sub>R</sub> ( $\mu$ A)
Peak pulse current	t <sub>p</sub> = 8/20 $\mu$ s	-	-	5	I <sub>PP</sub> (A)
Clamping voltage	I <sub>PP</sub> = 1 A, t <sub>p</sub> = 8/20 $\mu$ s	-	9.5	10	V <sub>C</sub> (V)
	I <sub>PP</sub> = 3 A, t <sub>p</sub> = 8/20 $\mu$ s	-	10	11	V <sub>C</sub> (V)
	I <sub>PP</sub> = 5 A, t <sub>p</sub> = 8/20 $\mu$ s	-	12.5	13.5	V <sub>C</sub> (V)
Junction capacitance	V <sub>RWM</sub> = 0 V, f = 1 MHz	-	0.25	0.35	C <sub>J</sub> (pF)

### Mechanical parameters, pad layout- mm/inches

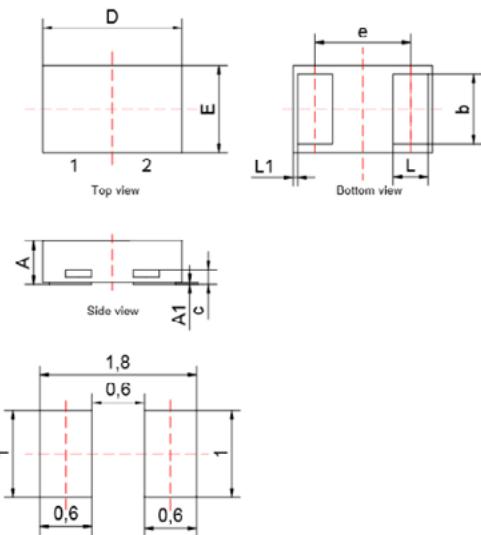

Dimension	Millimeters			Inches		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
C	0.12	0.15	0.18	0.005	0.006	0.007
D	0.95	1.00	1.05	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.65	0.022	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
L1	0.05 REF			0.002 REF		
h	0.07	0.12	0.17	0.003	0.005	0.007


### Part marking

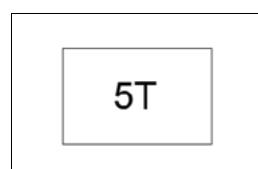

### Packaging information mm/inches

Drawing not to scale.


Supplied in tape and reel packaging, 10,000 parts per 7" diameter reel (EIA-481 compliant)

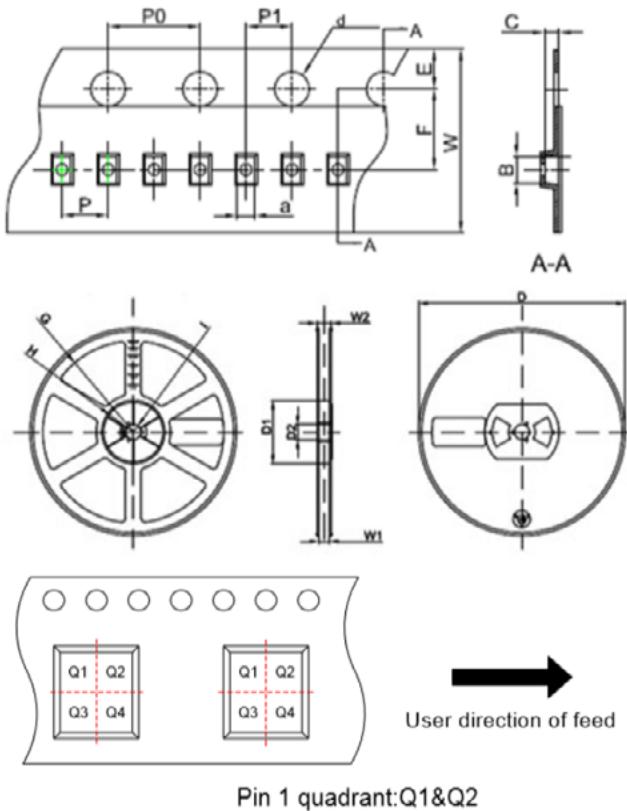


Symbol	Millimeters	Inches
	Typ.	Typ.
a	0.66	0.026
B	1.15	0.045
C	0.66	0.026
d	$\Phi 1.50$	$\Phi 0.059$
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	2.00	0.079
P1	2.00	0.079
W	8.00	0.315
D	$\Phi 178$	$\Phi 7.008$
D1	54.40	2.142
D2	13.00	0.512
G	R78.00	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484

**Ratings and V-I characteristic curves** (+25 °C unless otherwise noted)


**V-I curve characteristics (Bi-directional)**

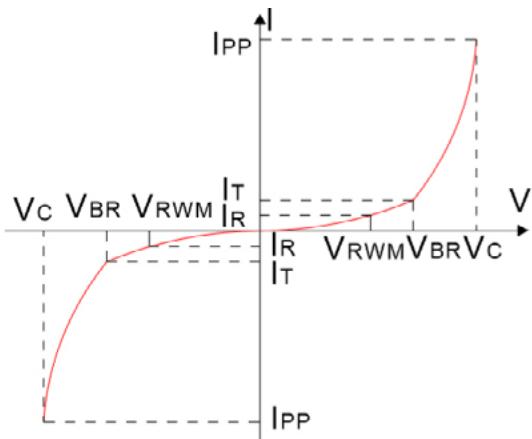

**Pulse waveform (8/20  $\mu$ s)**

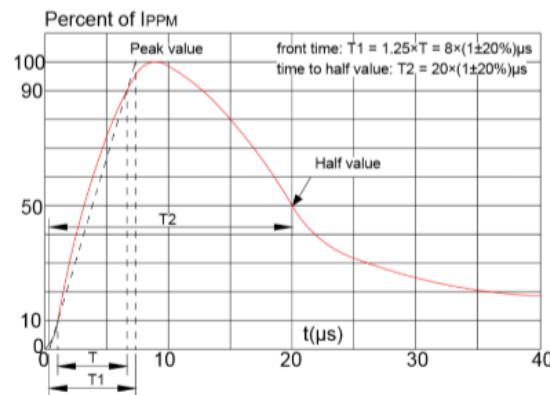

**Pulse derating curve**

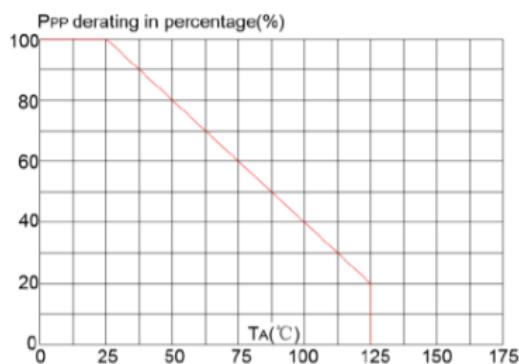

**ESD waveform**

