



# SVC12120V

## ULTRA LOW VF SCHOTTKY RECTIFIER

**VOLTAGE** 120 Volt **CURRENT** 12 Ampere

**TO-277** Unit : inch(mm)

### FEATURES

- Ideal for automated placement
- Ultra low forward voltage drop, low power loss
- High efficiency operation
- Low thermal resistance
- Ultra thin profile package for space constrained utilization
- Package suitable for automated handling
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard



### MECHANICAL DATA

Case : TO-277, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight : 0.00324 ounces, 0.092 grams

Marking : Part number

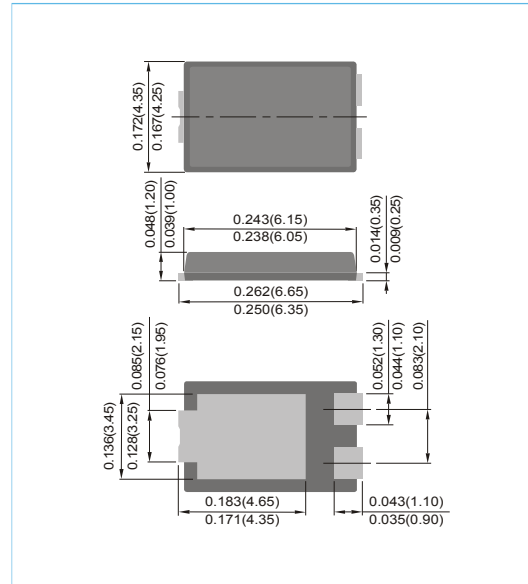

### MAXIMUM RATINGS(T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	120	V
Maximum RMS Voltage	V <sub>RMS</sub>	85	V
Maximum DC Blocking Voltage	V <sub>R</sub>	120	V
Maximum Average Rectified Output Current	I <sub>F(AV)</sub>	12	A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	200	A
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	110	°C/W
(Note 1)	R <sub>θJC</sub>	3	
Operating Junction Temperature Range And Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to + 150	°C

NOTES : 1.Mounted on a FR4 PCB, single-sided copper, mini pad.  
2.Mounted on 10cm\*10cm\*0.5mm copper pad area




# SVC12120V

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V <sub>BR</sub>	I <sub>R</sub> =0.5mA T <sub>A</sub> =25°C	120	-	-	V
Instantaneous forward voltage	V <sub>F</sub>	I <sub>F</sub> =1A T <sub>A</sub> =25°C	-	0.4	-	V
		I <sub>F</sub> =6A T <sub>A</sub> =25°C	-	0.59	-	V
		I <sub>F</sub> =12A T <sub>A</sub> =25°C	-	0.71	0.77	V
		I <sub>F</sub> =1A T <sub>A</sub> =125°C	-	0.29	-	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =96V T <sub>A</sub> =25°C	-	10	-	μA
		V <sub>R</sub> =120V T <sub>A</sub> =25°C T <sub>A</sub> =125°C	- -	- 35	100 -	μA mA




# SVC12120V

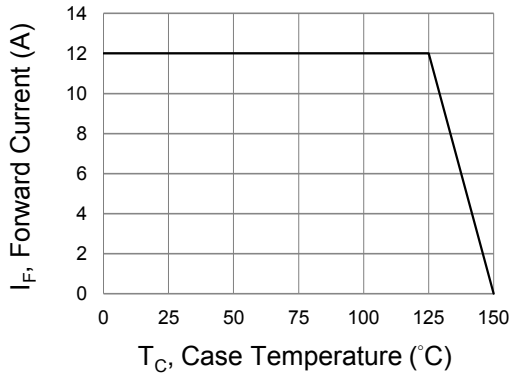


**Fig.1 Forward Current Derating Curve**

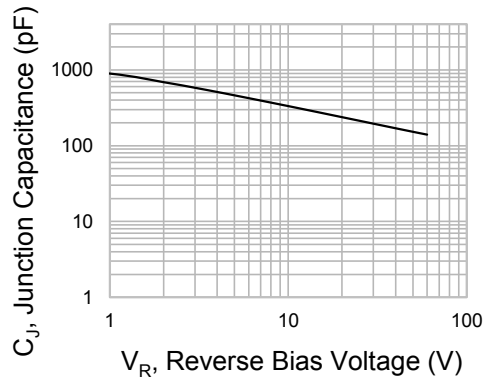


**Fig.2 Typical Junction Capacitance**

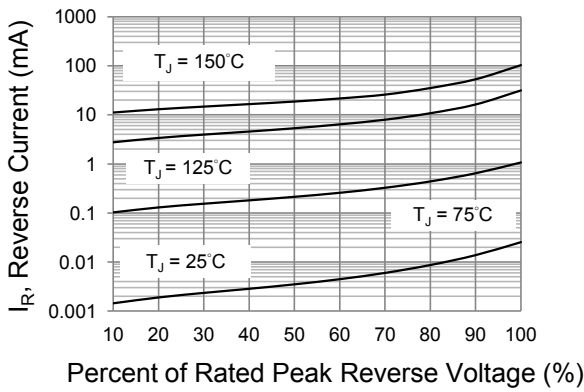

**Fig.3 Typical Reverse Characteristics**

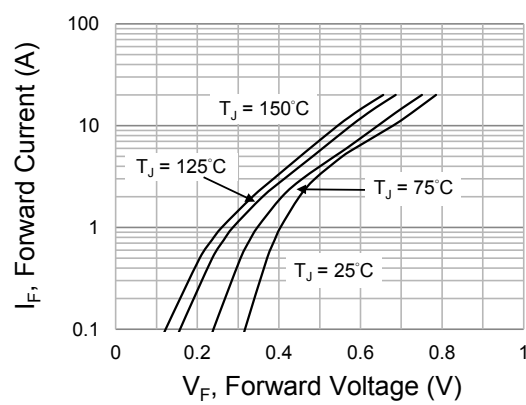

**Fig.4 Typical Forward Characteristics**

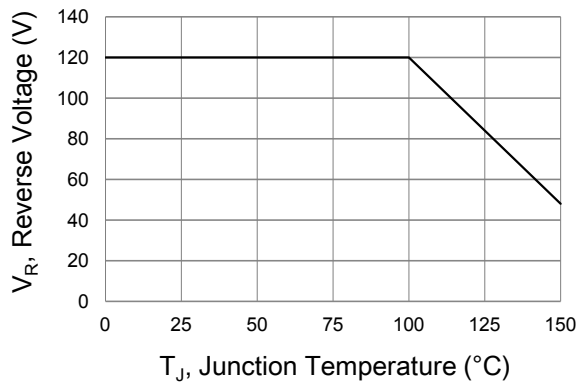


**Fig.5 Operating Temperature Derating Curve**



# SVC12120V

## MOUNTING PAD LAYOUT

TO-277 Unit : inch(mm)

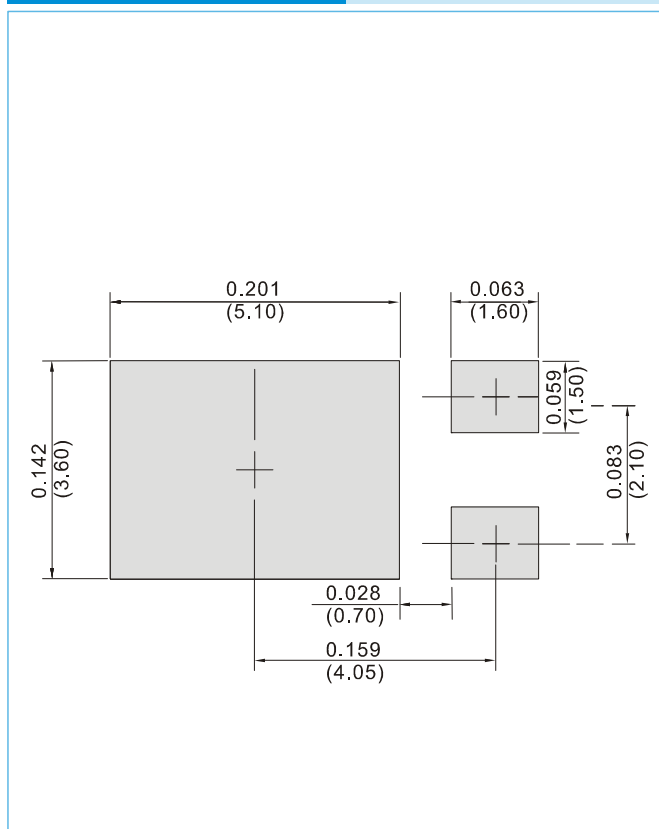

## ORDER INFORMATION

- Packing information  
T/R - 5K per 13" plastic Reel



# SVC12120V


**Part No\_packing code\_Version**

SVC12120V\_R2\_00001

**For example :**

**RB500V-40\_R2\_00001**

Part No.

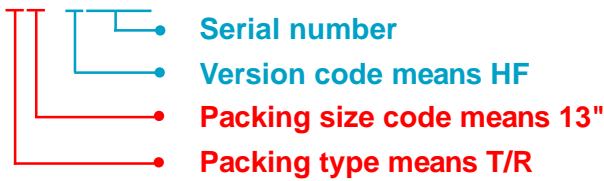

Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> -5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			