




TOP VIEW

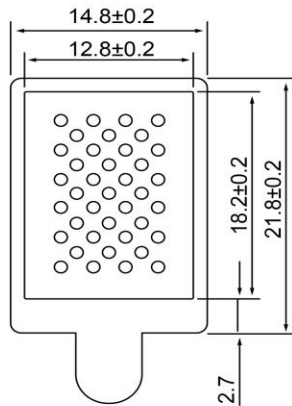


SIDE VIEW

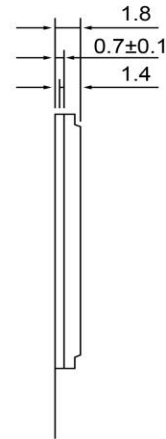

BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Shape	Rectangle		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		3/24/2015	J.S.			
Resonant Frequency	1,000	(Hz)									
Frequency Range	1,000 ~ 20,000	(Hz)									
SPL @ 10cm	86	(dBA)									
Capacitance	600	(nF)									
Diaphragm Material	Piezo										
Rated Voltage	7	(Vrms)									
Max Input Voltage	9	(Vrms)									
Mount Type	Flush mount										
Operating Temperature	-20 ~ +70	°C									
Storage Temperature	-30 ~ +85	°C									
Weight	1	(g)									
 <b>DB UNLIMITED</b>				<b>Piezo Speaker</b>			<b>SZ211006-1</b>				

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).