



		1	
Part Number:		DRAWN	11/21/2016
C720	1012 1	CJ	11/21/2016
52300	0812-1	CHECKED	11/21/2016
		P.D.	11/21/2010
Description:	Smool (or	APPROVED	11/21/2016
Piezo s	Speaker	J.S.	11/21/2016

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

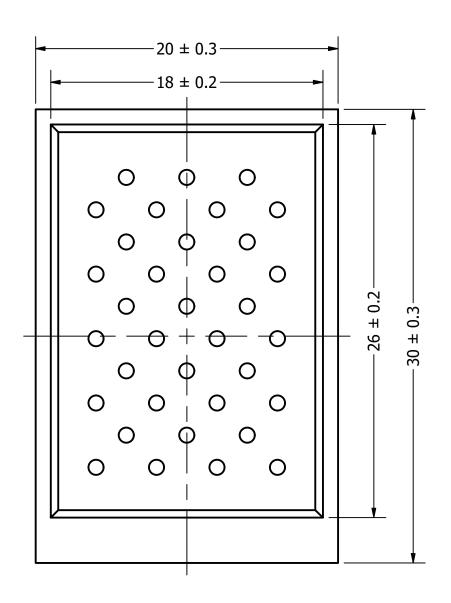

Side View

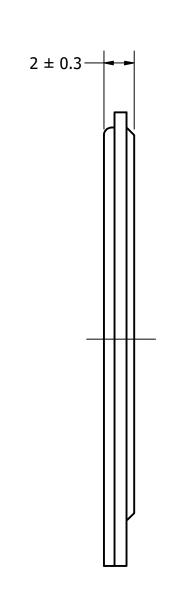

Bottom View

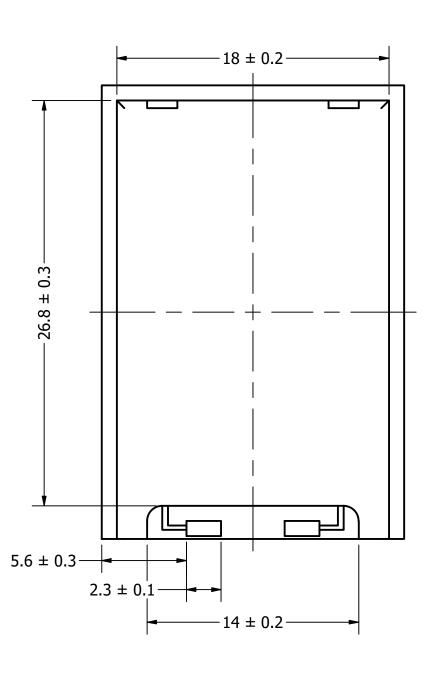

Items	Specifications	Conditions						
Sound Pressure Level	80	dB (@ 10cm)	REVISION HISTORY					
Resonant Frequency	1,300	Hz	REV	DESCRIPTION	DATE	APPROVED		
Frequency Range	300 ~ 20,000	Hz		Released from Engineering	11/1/2013	J.S.		
Rated Voltage	5	V	1	Updated to new template	11/21/2016	J.S.		
Max. Voltage	16	V	2	Updated frequency, capacitance, drawing, weight	2/19/2019	C.E.		
Capacitance	1,300	nF	3	Updated bottom view	8/17/2021	L.L.		
Material	Stainless Steel	NOTES						
Mount Type	Flush Mount		1) All dimensions are in mm unless otherwise noted					
Storage Temperature	-30 ~ +85	°C	°C 2) All tolerances are ± 0.5 mm unless otherwise noted					

Operating Temperature-20 ~ +70°C3) All parts meet RoHSWeight2.594) Subject to change or redrawn without notice