
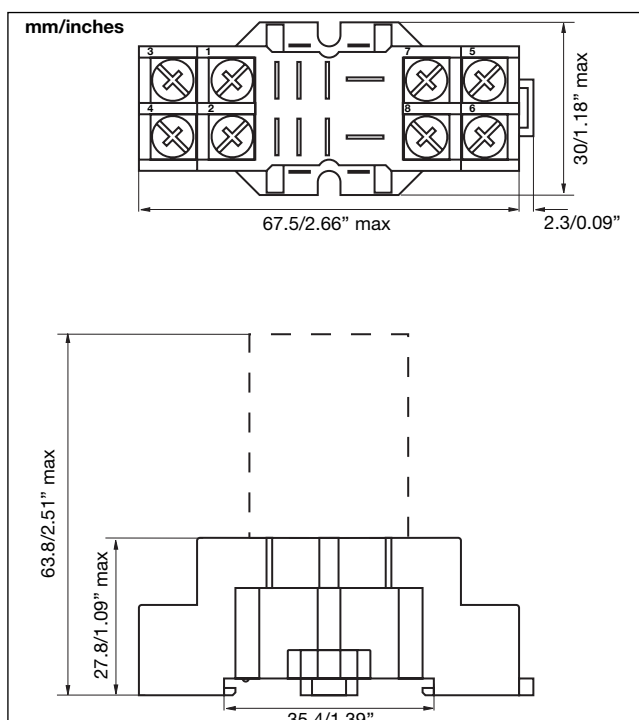


Sockets for RPY Relays


ZPY8A

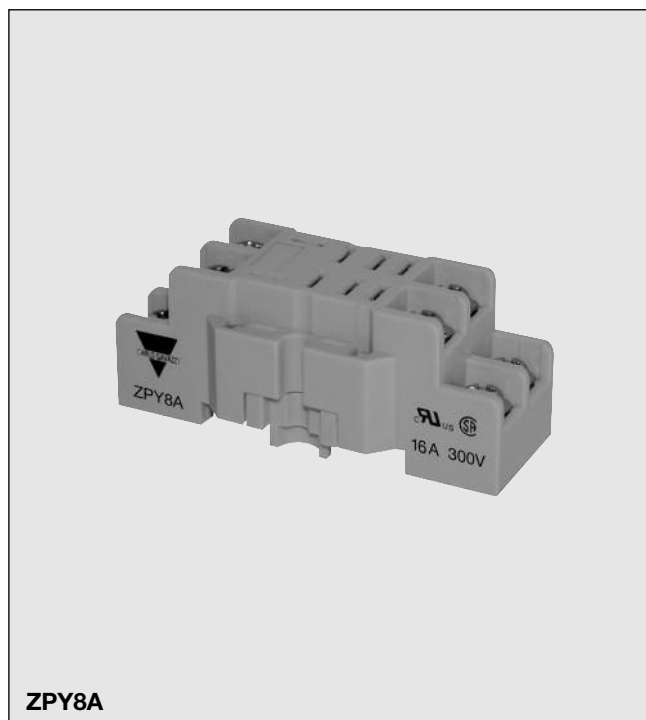


General data

| | |
|-----------------------|--|
| Rated voltage | 300VAC |
| Rated current | 16A |
| Insulation voltage | >2kV |
| Socket material | PA66 + GF (V0) |
| Socket colour | RAL 7035 / Pantone 1C |
| Contact material | Nickel Plated - Cu Zn 33 |
| Terminal type | Screw cage |
| Screw type | M3 with combi head (slotted, Philips Gr.1, Pozi) |
| Max. screw torque | 1.0N/m |
| Max wire section | 0.5-2.5mm ² (20AWG 14AWG) |
| Operating temperature | -25° to +85°C (-13° to +185°F) |
| UL rating | 10A 300VAC |
| UL temperature | 0° to +60°C (+32° to +140°F) |

Drilling pattern

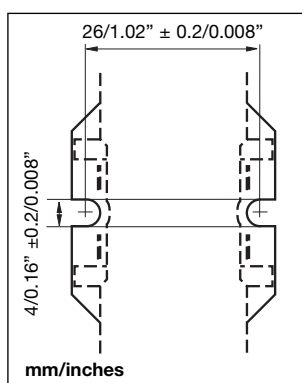

Wiring diagram

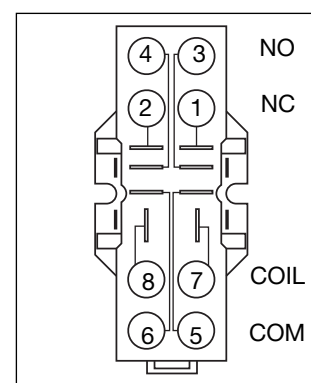

Approvals




Box content: 10 sockets
 Box size: (W 71 x D 57 x H 150) mm Weight: 480g
 (W 2.80 x D 2.25 x H 5.90) inches Weight: 16.93oz

Optional Accessories (to be ordered separately if required)

Hold-down spring steel SZPY 35M (see on page 101)

Optional Springs for ZPY series

SZPY 35M

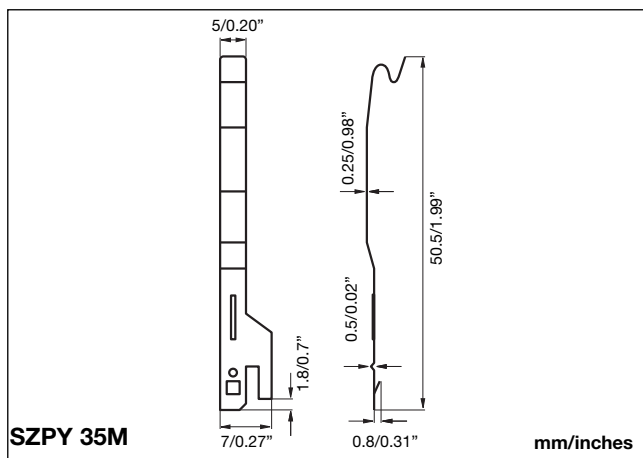

General data

Spring material

Stainless steel

Packaging

Box content: 1 plastic bag, 10pcs.

Weight: ~10g (0.36oz)

Note:

For each realy/socket are required at least 2 springs.

Up to 4 springs can be mounted.

RoHS
COMPLIANT