
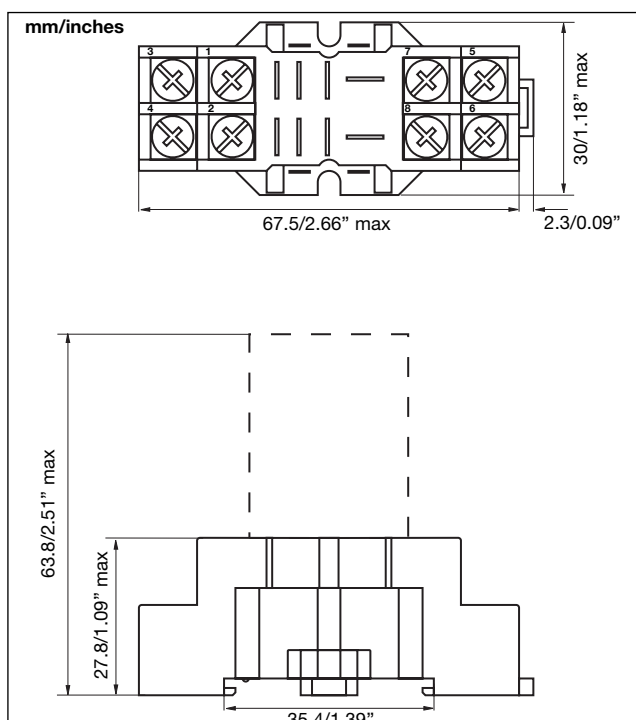


## Sockets for RPY Relays


### ZPY8A

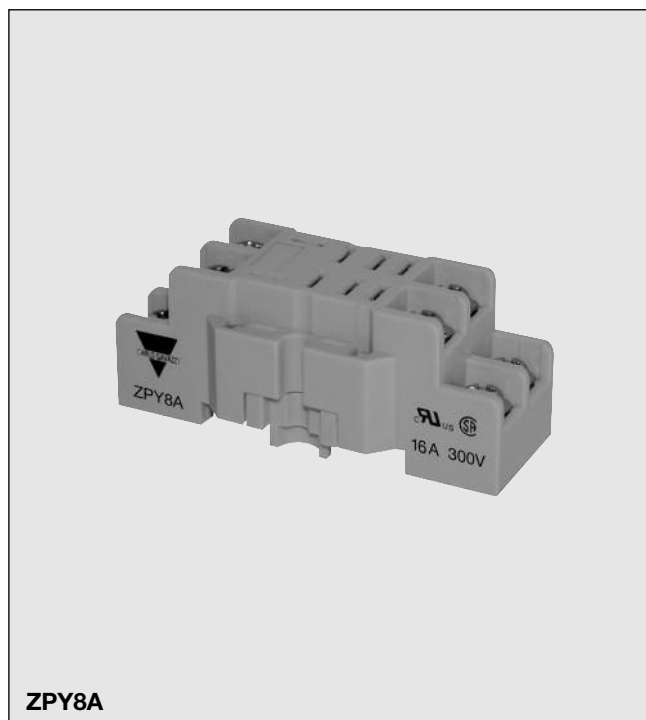


### General data

Rated voltage	300VAC
Rated current	16A
Insulation voltage	>2kV
Socket material	PA66 + GF (V0)
Socket colour	RAL 7035 / Pantone 1C
Contact material	Nickel Plated - Cu Zn 33
Terminal type	Screw cage
Screw type	M3 with combi head (slotted, Philips Gr.1, Pozi)
Max. screw torque	1.0N/m
Max wire section	0.5-2.5mm <sup>2</sup> (20AWG 14AWG)
Operating temperature	-25° to +85°C (-13° to +185°F)
UL rating	10A 300VAC
UL temperature	0° to +60°C (+32° to +140°F)

### Drilling pattern

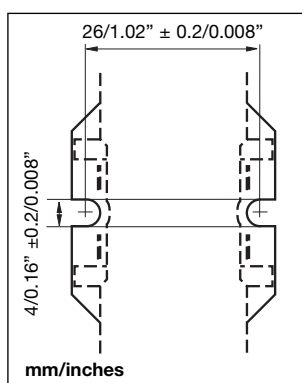

### Wiring diagram

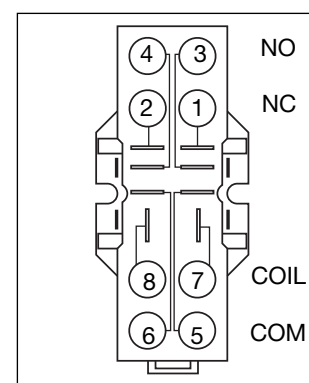

### Approvals




Box content: 10 sockets  
 Box size: (W 71 x D 57 x H 150) mm Weight: 480g  
 (W 2.80 x D 2.25 x H 5.90) inches Weight: 16.93oz

### Optional Accessories (to be ordered separately if required)

Hold-down spring steel SZPY 35M (see on page 101)

## Optional Springs for ZPY series

### SZPY 35M

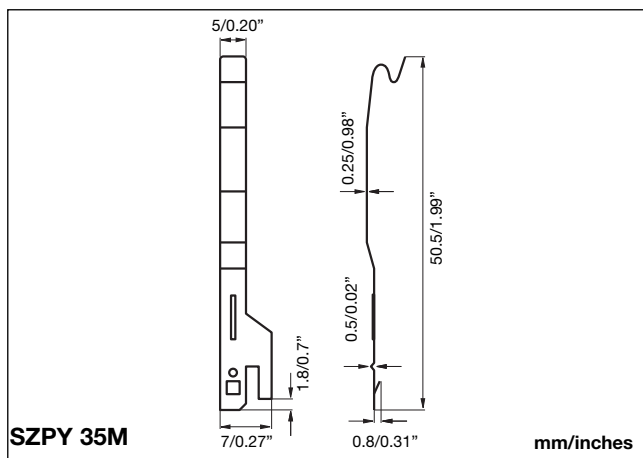

## General data

Spring material

Stainless steel

### Packaging

Box content: 1 plastic bag, 10pcs.

Weight: ~10g (0.36oz)

Note:

For each realy/socket are required at least 2 springs.

Up to 4 springs can be mounted.

**RoHS**  
COMPLIANT