

K-No.: 25105

200 A Current-Sensor-Module

 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit

Date: 07.02.2008

Customer: Standard Type

Cutomers Part No.:
Page 1 **of** 4

Description

- Closed loop (compensation)
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design

Applications

Mainly used for stationary operation in industrial applications:

- AC variabel speed drives and servo motor drives
- Static converters for for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptable Power Supplies (UPS)

Electrical Data – Ratings

I_{PN}	Primary rated current, r.m.s	200	A
R_M	Load resistance	0 ... 200	Ω
I_{SN}	Output rated current, r.m.s	100	mA
K_N	Turns ratio	1 : 2000	

Accuracy – Dynamic performance data (with DRV401 @ $V_C = 5V \pm 5\%$)

		min.	typ	max.	Unit
$I_{P,max}$	Max. measuring range @ $R_M = 1,563 \Omega$	± 300			A
$X(T)$	Measuring accuracy @ $I_{PN}, T_A = -40... +85^\circ C$			0.5	%
ϵ_L	Linearity			0.1	%
$I_0(T)$	Offset current @ $I_P=0, T_A = -40... +85^\circ C$		0.02	0.05	mA
I_{0H}	Hysteresis		0.03	0.1	mA
t_r	Response time		1		μs
$\Delta t(I_{p,max})$	Delay time at $di/dt = 100 A/\mu s$		1		μs
f	Frequency range	DC...100			kHz

General Data

		min.	typ.	max.	Unit
T_A	Ambient temperature	-40		+85	$^\circ C$
T_S	Storage temperature	-40		+85	$^\circ C$
m	Mass		123		g
R_S	Secondary coil resistance @ $T_A=85^\circ C$			24	Ω
C_k	Coupling capacity		13		pF
	Mechanical Stress according to M3209/3 Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours			10g	
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 – 4 to innerhole) Reinforced insulation, Insulation material group 1, Pollution degree 2				
S_{clear}	clearance (component without solder pad)	16			mm
S_{creep}	creepage (component without solder pad)	25			mm
V_{sys}	System voltage overvoltage category 3	RMS		1000	V
V_{work}	Working voltage (table 7 acc. to EN61800-5-1)	RMS		1700	V
U_{PD}	Rated discharge voltage	peak value		1700	V

Type Testing according to EN 61800-5-1 (Pin 1 – 4 to innerhole)

V_W	HV transient test according to M3064 (1,2 μs / 50 μs -wave form)			12	kV
V_d	Testing voltage to M3014		(5 s)	4.4	kV
V_e	Partial discharge voltage acc.M3024 (RMS) with V_{vor} (RMS)			1800	V
				2250	V

Datum	Name	Index	Änderung
07.02.08	Le	81	Connections adjusted on actual conditions (Mechanical outline). Insignificant

Hrsg.: KB-E editor	Bearb.: SA designer	KB-E: Le. check	KB-PM IA: KRe. check	freig.: Heu. released
-----------------------	------------------------	--------------------	-------------------------	--------------------------

K-No.: 25105

200 A Current-Sensor-Module
 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit

Date: 07.02.2008


Customer: Standard Type

Cutomers Part No.:

Page 2 of 4

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

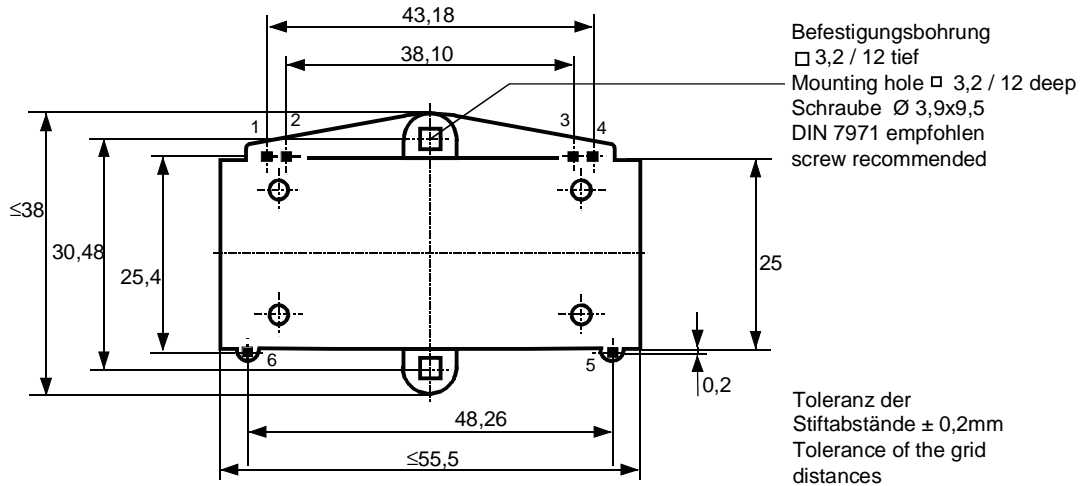


Connections:


Pin1...6:
0,88*0,60 mm

Marking:

VAC
 4645X080
 F DC

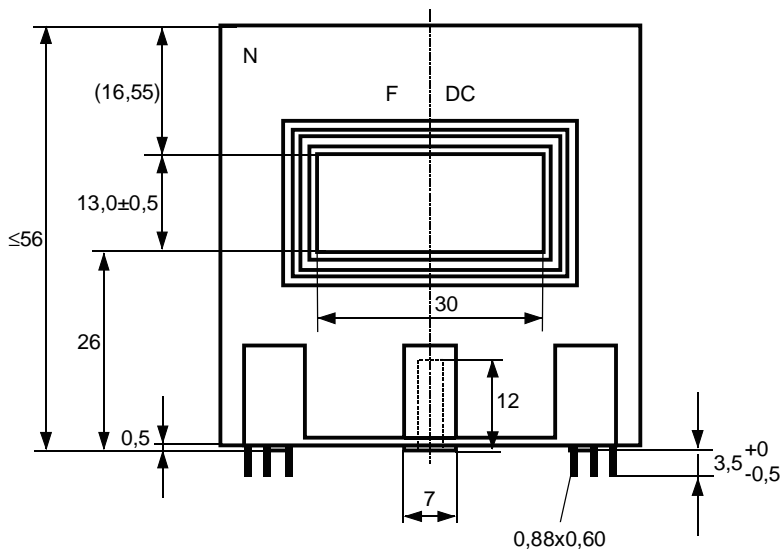

DC = Date Code
 F = Factory
 N = neu

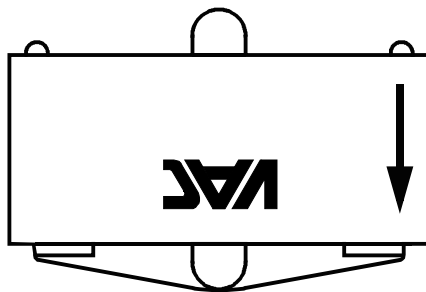

Hrsg.: KB-E
editor

Bearb: SA
designer

KB-E: Le.
check

KB-PM IA: KRe.
check

freig.: Heu.
released

K-No.: 25105

200 A Current-Sensor-Module


 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit

Date: 07.02.2008

Customer: Standard Type

Cutomers Part No.:

Page 3 of 4

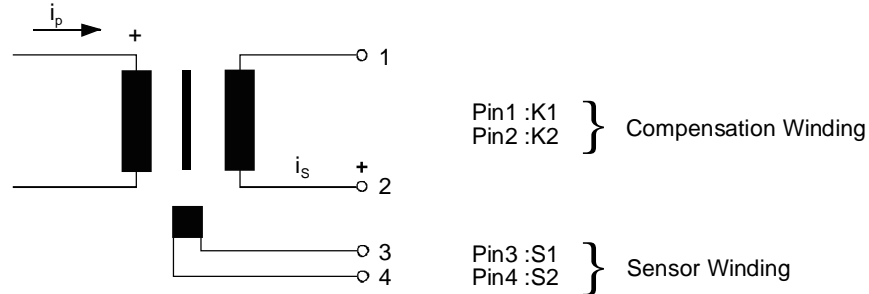Schematic diagram

Inspection (Measurements after temperature balance of the samples at room temperature.)

K_N (N1/N2)	(V)	M3011/6c:	Turns ratio ($I_p=200A$, 40...80 Hz)	$=1 : 2000 \pm 0.5$	%
I_0		M3226:	Offset current	< 0.1	mA
$\Delta\Phi$ (K1-K2)	(V)	M3090:	Magnetic Flux compensation core	33...37	nVs
$\Delta\Phi$ (S1-S2)	(V)	M3090:	Magnetic Flux sensor	20...35	nVs
R_S (K1-K2)	(V)	M3011/5:	Winding resistance compensation coil	16.7...19.2	Ω
R (S1-S2)	(V)	M3011/5:	Winding resistance magnetic probe coil	2.5...3.5	Ω
V_d	(V)	M3014:	Testing voltage, rms, 1s Preliminary to secondary	2.2	kV
V_e	(AQL1/S4)	M3024:	Partial discharge voltage (RMS) with V_{vor} (RMS)	1800 2250	V V

Applicable documents

Current direction: A positive output current appears at point I_s , by primary current in direction of the arrow.
 Temperature of the primary conductor should not exceed 110°C
 Housing and bobbin material: UL-listed. Flammability class UL 94V-0.
 Enclosures according to IEC 60529: IP50.

Additional data available on request.
 This specification is no declaration of warranty acc. BGB §443.

 Hrsg.: KB-E
 editor

 Bearb: SA
 designer

 KB-E: Le.
 check

 KB-PM IA: KRe.
 check

 freig.: Heu.
 released