



**SURFACE MOUNT**

# Directional Coupler

## TCD-18-4-75+

75Ω

10 to 1000 MHz

### FEATURES

- Wideband, 10 to 1000 MHz
- Low mainline loss, 0.7 dB typ.
- Aqueous washable
- Leads for excellent solderability
- Protected by US Patent 6,140,887



Generic photo used for illustration purposes only

CASE STYLE: DB714

### APPLICATIONS

- VHF/UHF
- CATV
- Cellular

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	—	10	—	1000	MHz
Mainline Loss <sup>1</sup>	10-100	—	0.9	1.3	dB
	100-500	—	0.7	1.2	
	500-1000	—	0.8	1.3	
Coupling	10-1000	—	18.0±0.5	—	dB
Coupling Flatness (±)	10-1000	—	±0.9	—	dB
Directivity	10-100	15	20	—	dB
	100-500	15	22	—	
	500-1000	—	18	—	
VSWR	10-1000	—	1.20	—	:1
Input Power	10-1000	—	—	1.0	W
	100-1000	—	—	1.0	

1. Mainline loss includes theoretical power loss at coupled port.


### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

\* Case temperature is defined as temperature on ground leads.

### ELECTRICAL SCHEMATIC

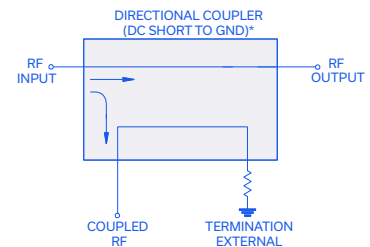

\*Electrical schematic is for Directional coupler with internal transformer(s) and external termination



**SURFACE MOUNT**

# Directional Coupler

**TCD-18-4-75+**

Mini-Circuits

75Ω


10 to 1000 MHz

**PIN CONNECTIONS**

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

**PRODUCT MARKING:** N/A

**DEMO BOARD MCL P/N: TB-72  
SUGGESTED PCB LAYOUT (PL-010)**

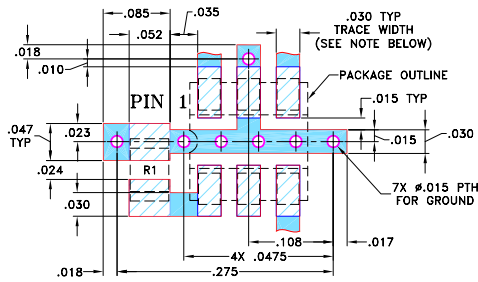

RESISTOR R1: 75 ± 1% Ohm, 0805 SIZE


**NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

**OUTLINE DRAWING**

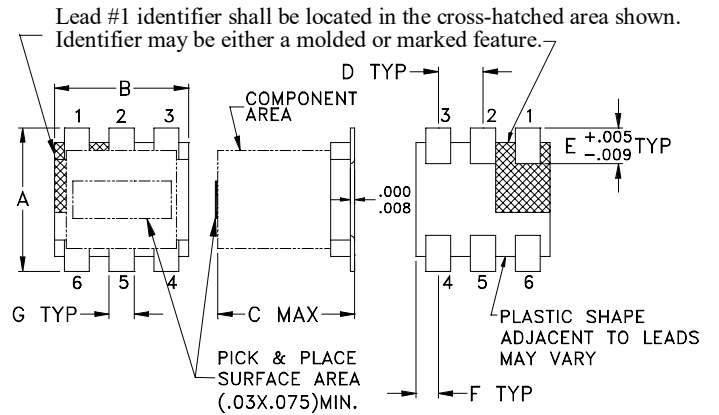

**PCB Land Pattern**

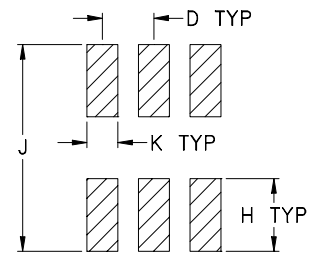

Suggested Layout,  
Tolerance to be within ±.002

**OUTLINE DIMENSIONS (Inches/mm)**

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

**TAPE & REEL INFORMATION: F47**