



		1	
Part Number:		DRAWN	7/0/2015
TE04400	202.2	CJ	7/9/2015
IEU44	·UU3-2	CHECKED	11/23/2015
		P.D	11/23/2013
Description:	nical Transducer	APPROVED	11/22/2015
Electro-Mecha	nical Transducer	15	11/23/2015

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Bottom View

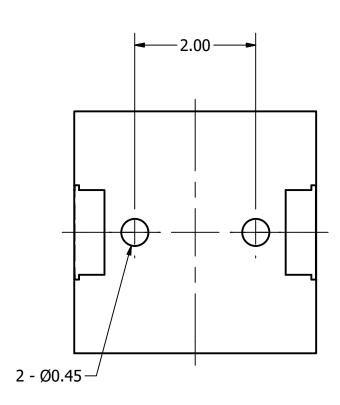


Side View (2)

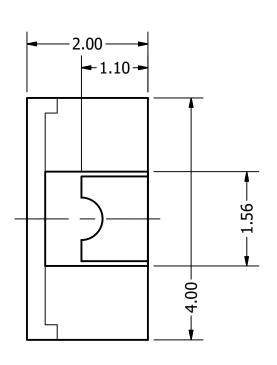


Top View



Side View (1)

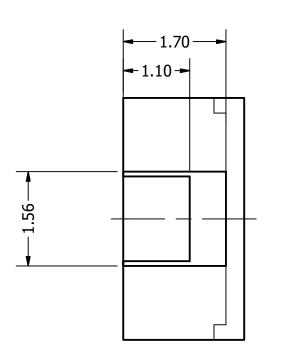

Front View

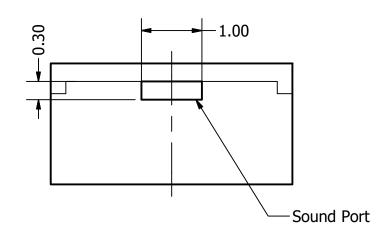

Items	Specifications	Conditions	Tol: ± 0.30				
Sound Pressure Level	70	dB (@ 10cm)					
Resonant Frequency	4,000	Hz					
Rated Voltage	3	V					
Voltage Range	2~4	V	REVISION HISTORY				
Coil Resistance	17 ± 3	Ω	REV	DESCRIPTION	DATE	APPROVED	
Max. Rated Current	90	mA		Released from Engineering	11/23/2015	J.S.	
Storage Temperature	-20~ +70	°C	NOTES				
Operating Temperature	-30~ +80	°C	1) All dimensions are in mm unless otherwise noted				
Connection Method	Surface Mount Pads		2) All tolerances are ± 0.5 mm unless otherwise noted				
Mount Type	Surface Mount		3) All parts meet RoHS				
Housing Material	LCP		4) Subject to change or redrawn without notice				
Weight	0.1	g					
4		3	^	2		1	