


			1		
	Part Number:		DRAWN		
	TEAC	2705-6	CJ	9/20/2018	
	IEU92		CHECKED	10/1/2018	
			C.H.		
	Description:	nical Transducer	APPROVED	10/1/2018	
	Electro-Mechai		C.F.		


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Top View

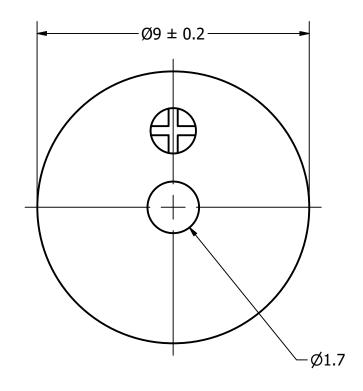


1

Side View

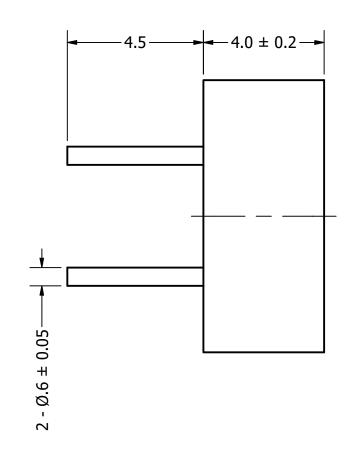

Bottom View

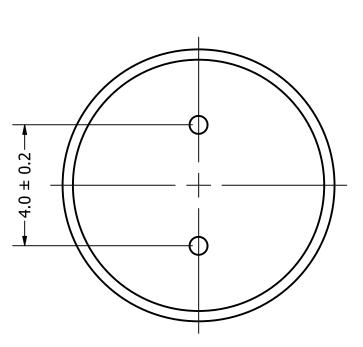

Items	Specifications	Conditions						
Min. Sound Pressure Level	85	dB (@ 10cm)						
Resonant Frequency	2,731	Hz		REVISION HISTORY				
Rated Voltage	5	V	REV	DESCRIPTION	DATE	APPROVED		
Voltage Range	3 ~ 7	V		Released from Engineering	10/21/2013	J.S.		
Coil Resistance	40	Ω	1	Updated temps, coil resistance, max current, drawing to	10/1/2010	C.E.		
Max. Rated Current	85	mA		new template	10/1/2018			
Storage Temperature	-40 ~ +85	°C	NOTES					
Operating Temperature	-40 ~ +85	°C	1) All dimensions are in mm unless otherwise noted					
Connection Method	PC pins		2) All tolerances are ± 0.5 mm unless otherwise noted					
Mount Type	Thru Hole		3) All parts meet RoHS					
Housing Material	Noryl		4) Subject to change or redrawn without notice					

g