


DIMENSIONS: Inch [mm]  
CO-PLANARITY: 0.004 [0.10]  
TOLERANCES: ±0.005 INCH IF NOT SPECIFIED

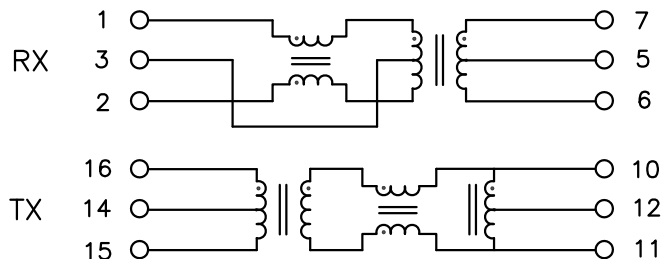

## PART NO. : TG22-3506NLRL

16PIN SMT 10/100BASE-TX ISOLATION MODULE  
RoHS COMPLIANT

COMPATIBLE TO LEAD-FREE SOLDERING PROCESS  
CONDITION PER IPC/JEDEC J-STD-020C

OPERATING TEMPERATURE 0/+70°C

## ELECTRICAL SPECIFICATIONS @25°C

TURNS RATIO TX P16-15:P10-11 RX P1-2:P7-6	1CT:1CT ±3% 1CT:1CT ±3%
OCL (100KHz,0.1Vrms,8mA)	350µH min
DCR	0.9Ω max
LL (1MHz)	0.4µH max
Cw/w	15pF typ
INSERTION LOSS	
0.1-100MHz	-1.1dB max
RETURN LOSS	
0.5-30MHz	-18dB min
40MHz	-15.5dB min
50MHz	-13.6dB min
60-80MHz	-10dB min
CROSSTALK 0.1-100MHz	-38dB typ
CMR 0.1-100MHz	-40dB typ
ISOLATION	1,500Vrms



**HALO/PBL**

CALIFORNIA, USA  
KOWLOON, HONG KONG  
SINGAPORE

TITLE	ISOLATION MODULE		SIGNATURES	DATE	REV.	DESC.	DATE
FOR	FAST ETHERNET, IEEE802.3u		DRAWN	LI ZHI ZHONG	10/10/05	A	FIRST ISSUE
PART NO.	TG22-3506NLRL		CHECKED	LEI KEONG	1/28/14	B	PROD. RELEASE
SCALE	NONE	PAGE	1 OF 1	APPROVED	PETER LU	1/28/14	
				FILE	TG22NLRL.DWG		