

MODEL TL-4920


International size reference: C, ER26500

TECHNICAL DATA


(Typical values @ +25°C for batteries stored for one year or less)

■ Nominal capacity @ 3 mA, to 2 V	8.5 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	75 mA
■ Maximum 1 sec. pulse capability	200 mA
■ Weight	49.5 g (1.746 oz)
■ Volume	26 cc
■ Operating temperature range	-55 °C to +85 °C
■ IEC 60086-4 certified	
■ U.L. Component Recognition, MH 12193	

TADIRAN LITHIUM BATTERIES

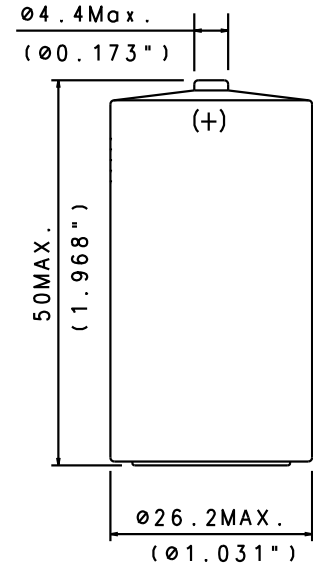


DISCHARGE CHARACTERISTICS @ +25°C

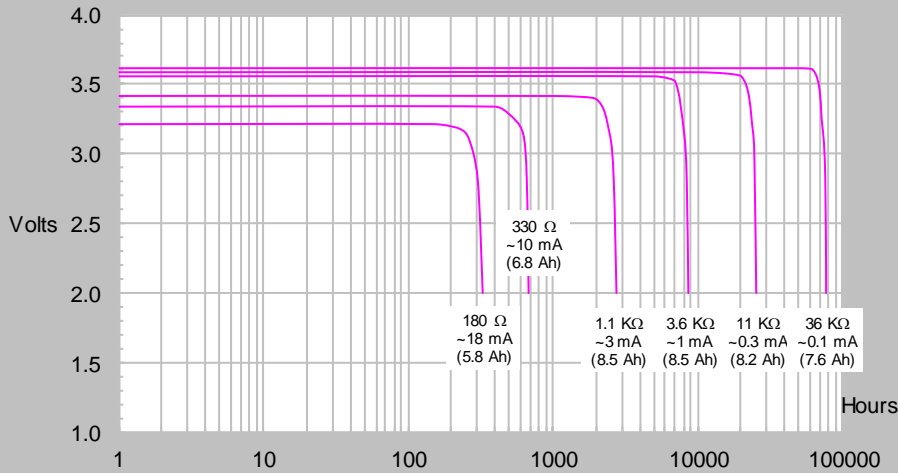


AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4920-21000
SUFFIX- /T SOLDER TABS	15-4920-31000

VOLTAGE VS. TEMPERATURE

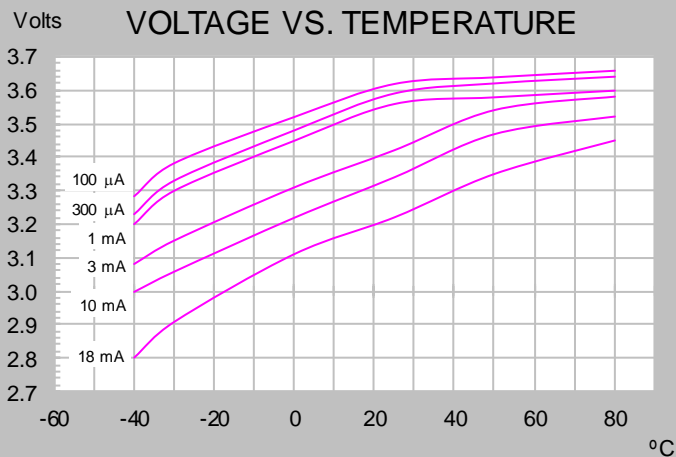

CAPACITY VS. CURRENT

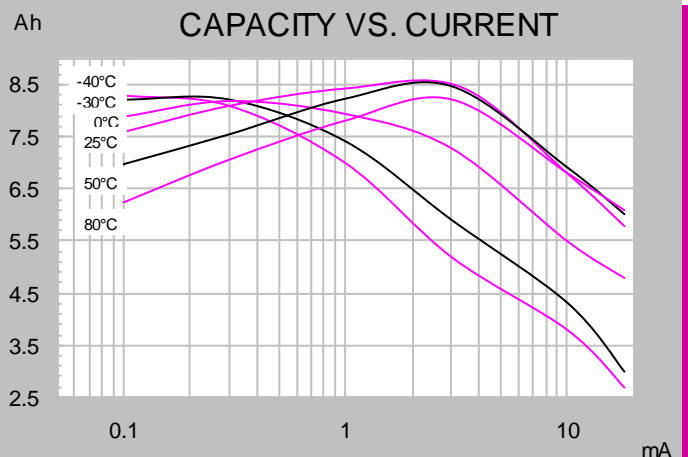

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. C 01/06