

MODEL TL-4937


International size reference: DD, ER32L1245

TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)




| | |
|--|------------------|
| ■ Nominal capacity @ 10 mA, to 2 V | 35 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 450 mA |
| ■ Maximum 1 sec. current capability | 1000 mA |
| ■ Weight | 190 g (6.702 oz) |
| ■ Volume | 105 cc |
| ■ Operating temperature range | -55 °C to +85 °C |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

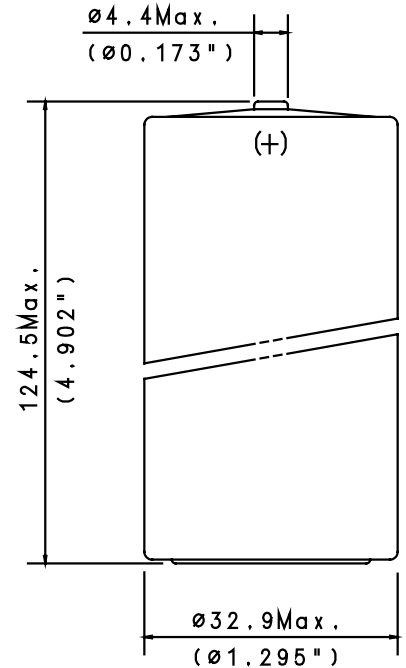

TERMINATIONS & ORDERING NO.

| | |
|------------------------|---------------|
| SUFFIX- /S STANDARD | 15-4937-21000 |
| SUFFIX- /T SOLDER TABS | 15-4937-31000 |

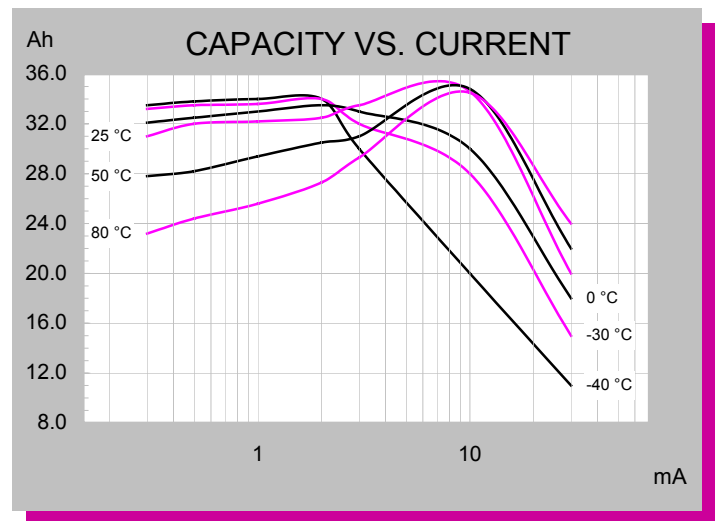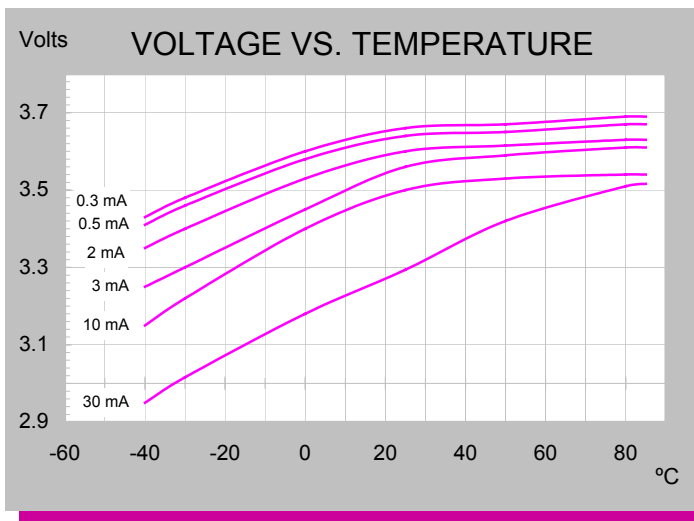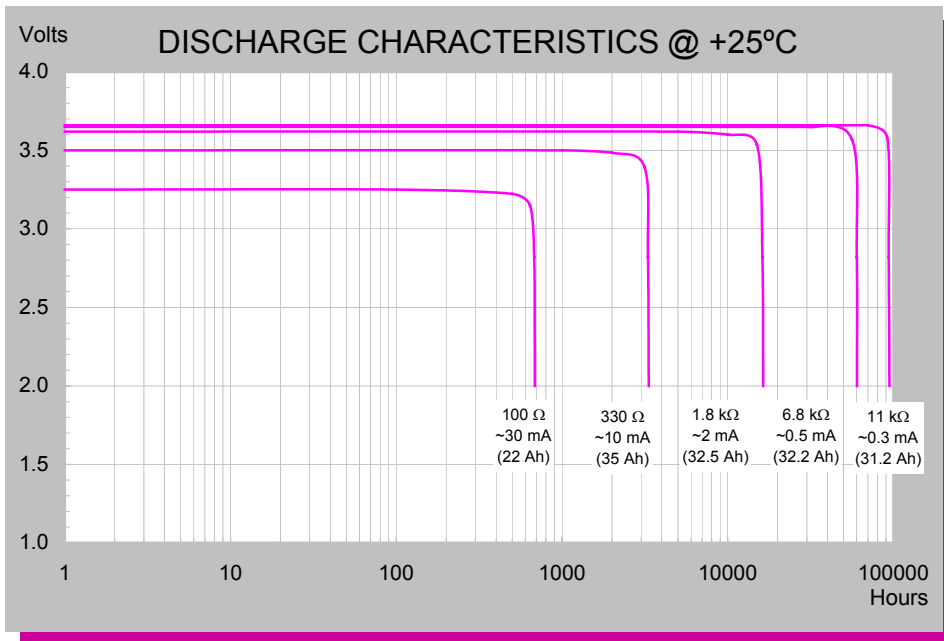

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501236 Rev. A 03/06