

# MODEL TL-4937


International size reference: DD, ER32L1245

## TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)




■ Nominal capacity @ 10 mA, to 2 V	35 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	450 mA
■ Maximum 1 sec. current capability	1000 mA
■ Weight	190 g (6.702 oz)
■ Volume	105 cc
■ Operating temperature range	-55 °C to +85 °C
■ U.L. Component Recognition, MH 12193	

# TADIRAN LITHIUM BATTERIES

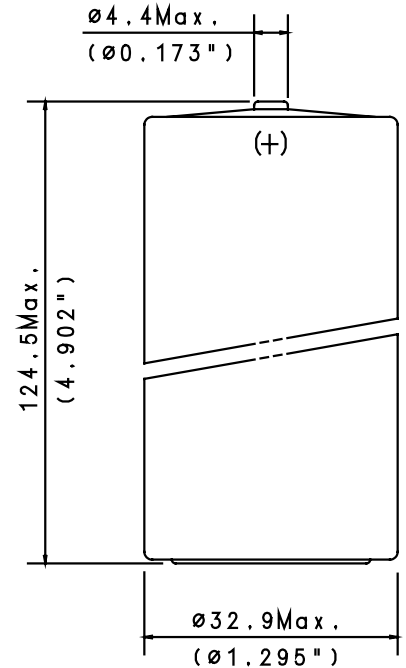

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-4937-21000
SUFFIX- /T SOLDER TABS	15-4937-31000

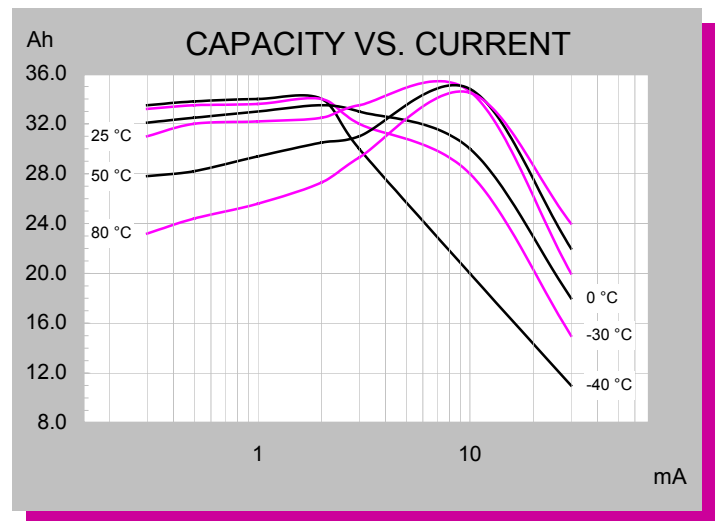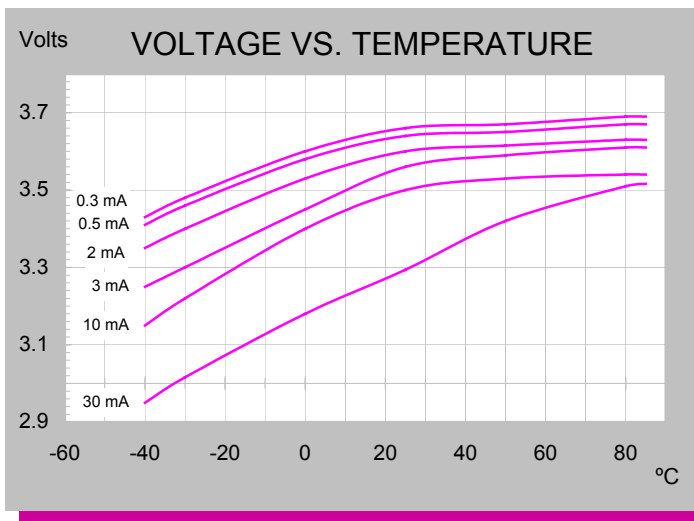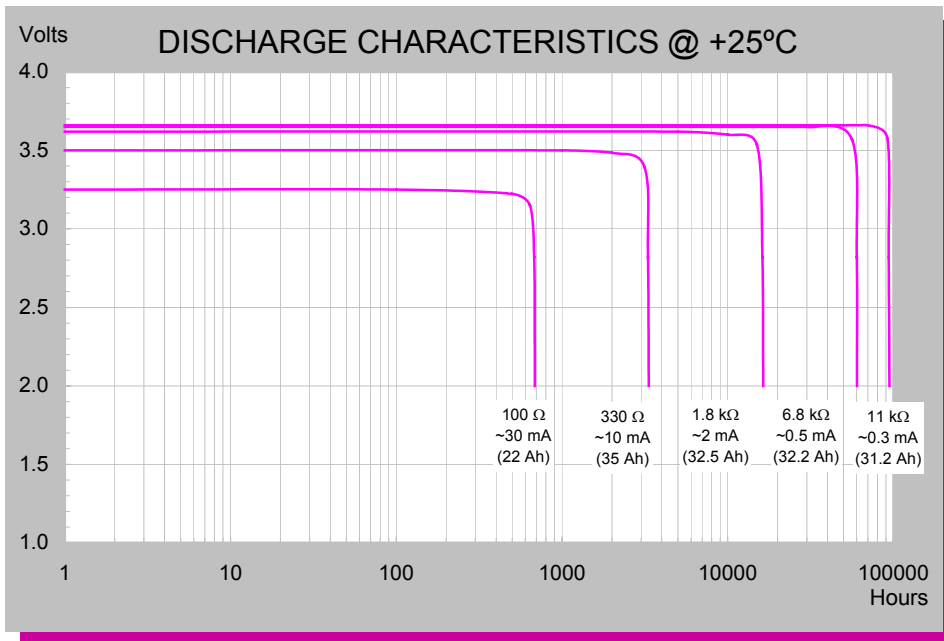

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.