


Automotive adjustable voltage reference

Datasheet - production data

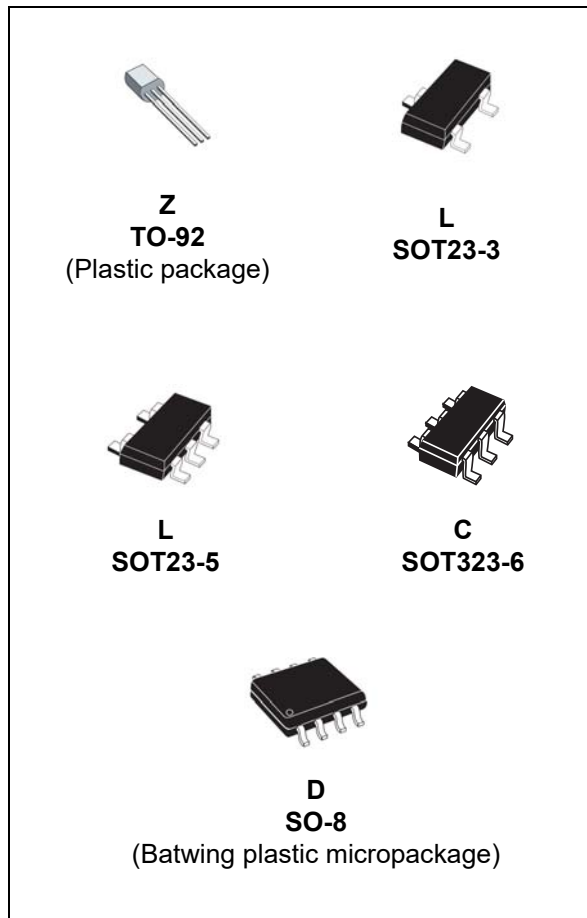

Applications

- Power supply
- Industrial
- Automotive

Description

The TL431 and TL432 are adjustable shunt voltage references with guaranteed temperature stability over the entire operating temperature range. The device temperature range is extended for the automotive version from -40 °C up to +125 °C. The output voltage can be set to any value between 2.5 and 36 V with two external resistors. The TL431 and TL432 operate with a wide current range from 1 to 100 mA with a typical dynamic impedance of 0.22 Ω.

Features

- AEC-Q100 qualified
- Adjustable output voltage: 2.5 to 36 V
- Sink current capability: 1 to 100 mA
- Typical output impedance: 0.22 Ω
- 0.5% voltage precision only on the TL431B version
- 1% and 2% voltage precision
- Automotive temp. range -40 °C to +125 °C



Contents

| | | |
|----------|--|-----------|
| 1 | Schematic diagrams | 3 |
| 2 | Absolute maximum ratings and operating conditions | 4 |
| 3 | Electrical characteristics | 5 |
| | Reference input voltage deviation overtemperature range | 8 |
| 4 | Package information | 12 |
| 4.1 | SO-8 package information | 13 |
| 4.2 | TO-92 ammpack and tape and reel package information | 14 |
| 4.3 | TO-92 (bulk) package information | 15 |
| 4.4 | SOT23-3 package information | 16 |
| 4.5 | SOT23-5 package information | 17 |
| 4.6 | SOT323-6 package information | 18 |
| 5 | Ordering information | 19 |
| 6 | Revision history | 21 |

1 Schematic diagrams

Figure 1. TO-92 pin connections (top view)

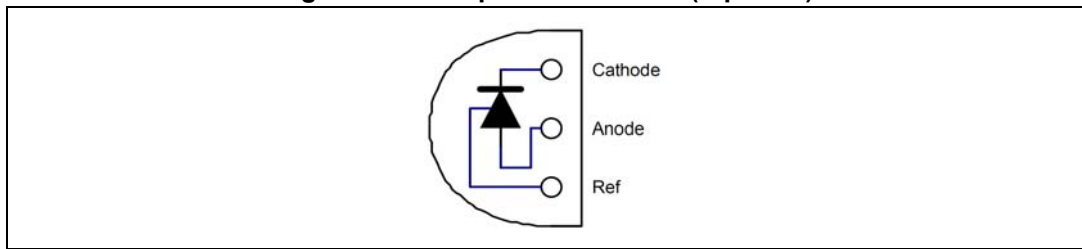


Figure 2. SO-8 batwing pin connections (top view)

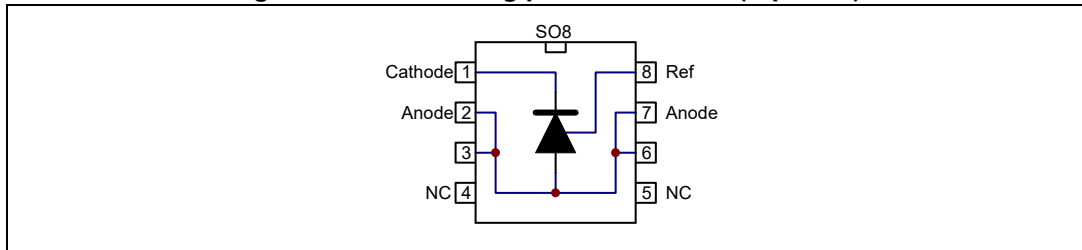


Figure 3. SOT23-5 and SOT23-3 pin connections (top view)

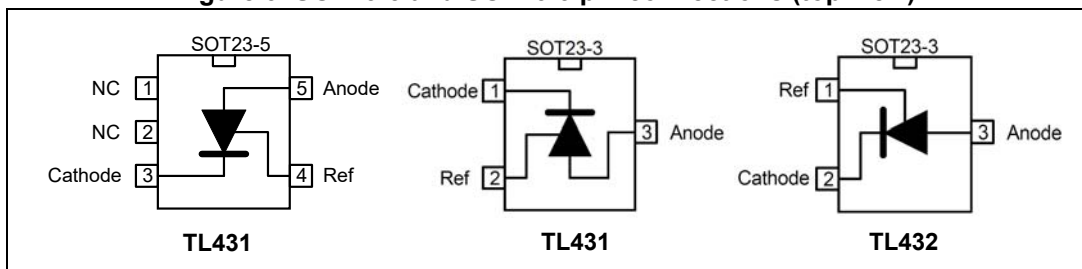


Figure 4. SOT323-6 pin connections (top view)


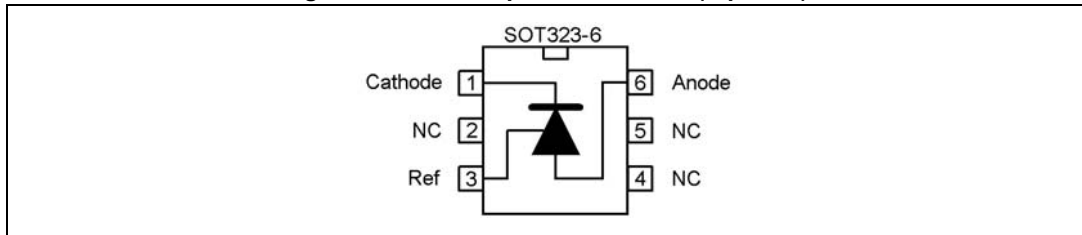


Figure 5. TL431 and TL432 block diagram

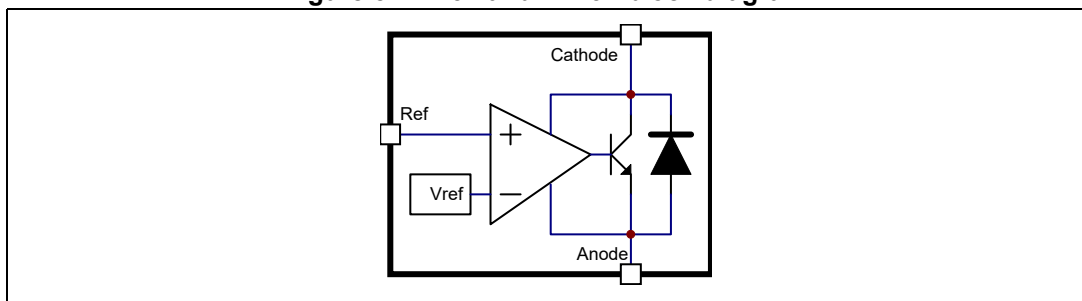

2 Absolute maximum ratings and operating conditions

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|------------|--|--------------|------|
| V_{KA} | Cathode to anode voltage | 37 | V |
| I_k | Continuous cathode current range | -100 to +150 | mA |
| I_{ref} | Reference input current range | -0.05 to +10 | mA |
| R_{thjc} | Thermal resistance junction to case | | |
| | TO-92 | 57 | °C/W |
| | SO-8 batwing | 30 | |
| | SOT23-3L | 136 | |
| | SOT23-5L | 67 | |
| SOT323-6L | 110 | | |
| R_{thja} | Thermal resistance junction to ambient | | |
| | TO-92 | 200 | °C/W |
| | SO-8 batwing | 85 | |
| | SOT23-3L | 248 | |
| | SOT23-5L | 157 | |
| SOT323-6L | 221 | | |
| T_{stg} | Storage temperature range | -65 to +150 | °C |
| T_J | Junction temperature | 150 | °C |
| ESD | TL431IY, TL431AIY-T: HBM (human body model) ⁽¹⁾ | 3000 | V |
| | TL431-TL432: HBM (human body model) | 2000 | |
| | MM: machine model ⁽²⁾ | 200 | |
| | CDM: charged device model ⁽³⁾ | 1500 | |

- Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 k Ω resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
- Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω). This is done for all couples of connected pin combinations while the other pins are floating.
- Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to the ground through only one pin. This is done for all pins.

Table 2. Operating conditions

| Symbol | Parameter | Value | Unit |
|------------|--------------------------------------|-----------------|------|
| V_{KA} | Cathode to anode voltage | V_{ref} to 36 | V |
| I_k | Cathode current | 1 to 100 | mA |
| T_{oper} | Operating free-air temperature range | | °C |
| | TL431C/AC | 0 to +70 | |
| | TL431I/AI - TL432I/AI | -40 to +105 | |
| | TL431B | -40 to +125 | |
| | TL431IY/AIY | -40 to +125 | |

3 Electrical characteristics

Table 3. TL431C ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

| Symbol | Parameter | TL431C | | | TL431AC | | | Unit |
|--|---|---------------|------------|---------------|---------------|------------|---------------|---------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V_{ref} | Reference input voltage $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | 2.44 2.423 | 2.495 - | 2.55 2.567 | 2.47 2.453 | 2.495 - | 2.52 2.537 | V |
| ΔV_{ref} | Reference input voltage deviation overtemperature range ⁽¹⁾ $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{min} \leq T_{amb} \leq T_{max}$ | - | 3 | 17 | - | 3 | 15 | mV |
| $\frac{\Delta V_{ref}}{\Delta V_{KA}}$ | Ratio of change in reference input voltage to change in cathode to anode voltage $I_k = 10\text{ mA}$ - $\Delta V_{KA} = 10\text{ V}$ to V_{ref} $\Delta V_{KA} = 36\text{ V}$ to 10 V | -2.7 -2 | -1.4 -1 | - - | -2.7 -2 | -1.4 -1 | - - | mV/V |
| I_{ref} | Reference input current $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | - - | 1.8 - | 4 5.2 | - - | 1.8 - | 4 5.2 | μA |
| ΔI_{ref} | Reference input current deviation overtemperature range $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{min} \leq T_{amb} \leq T_{max}$ | - | 0.4 | 1.2 | - | 0.4 | 1.2 | μA |
| I_{min} | Minimum cathode current for regulation $V_{KA} = V_{ref}$ | - | 0.5 | 1 | - | 0.5 | 0.6 | mA |
| I_{off} | Off-state cathode current | - | 2.6 | 1000 | - | 2.6 | 1000 | nA |
| $ Z_{KA} $ | Dynamic impedance ⁽²⁾ $V_{KA} = V_{ref}$, $\Delta I_k = 1$ to 100 mA , $f \leq 1\text{ kHz}$ | - | 0.22 | 0.5 | - | 0.22 | 0.5 | Ω |

1. See definition of [Section : Reference input voltage deviation overtemperature range](#).

2. The dynamic impedance is defined as $|Z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_k}$

Table 4. TL431B ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

| Symbol | Parameter | TL431B | | | Unit |
|--|---|----------------|------------|----------------|---------------|
| | | Min. | Typ. | Max. | |
| V_{ref} | Reference input voltage $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | 2.483 2.453 | 2.495 - | 2.507 2.537 | V |
| ΔV_{ref} | Reference input voltage deviation overtemperature range ⁽¹⁾ $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{min} \leq T_{amb} \leq T_{max}$ | - | 7 | 30 | mV |
| $\frac{\Delta V_{ref}}{\Delta V_{ka}}$ | Ratio of change in reference input voltage to change in cathode to anode voltage $I_k = 10\text{ mA}$ - $\Delta V_{KA} = 10\text{ V}$ to V_{ref} $\Delta V_{KA} = 36\text{ V}$ to 10 V | -2.7 -2 | -1.4 -1 | - - | mV/V |
| I_{ref} | Reference input current $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | - - | 1.8 - | 4 6.5 | μA |
| ΔI_{ref} | Reference input current deviation overtemperature range $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{min} \leq T_{amb} \leq T_{max}$ | - | 0.8 | 2.5 | μA |
| I_{min} | Minimum cathode current for regulation $V_{KA} = V_{ref}$ | - | 0.45 | 0.6 | mA |
| I_{off} | Off-state cathode current | - | 180 | 500 | nA |
| $ Z_{KA} $ | Dynamic impedance ⁽²⁾ $V_{KA} = V_{ref}$, $\Delta I_k = 1$ to 100 mA , $f \leq 1\text{ kHz}$ | - | 0.22 | 0.5 | Ω |

1. See definition of [Section : Reference input voltage deviation overtemperature range](#).

2. The dynamic impedance is defined as $|Z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_k}$

Table 5. TL431I/TL432I ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

| Symbol | Parameter | TL431I/TL432I | | | TL431AI/TL432AI | | | Unit |
|--|---|---------------|------------|--------------|-----------------|------------|--------------|---------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V_{ref} | Reference input voltage $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | 2.44 2.41 | 2.495 - | 2.55 2.58 | 2.47 2.44 | 2.495 - | 2.52 2.55 | V |
| ΔV_{ref} | Reference input voltage deviation overtemperature range ⁽¹⁾ $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{min} \leq T_{amb} \leq T_{max}$ | - | 7 | 30 | - | 7 | 30 | mV |
| $\frac{\Delta V_{ref}}{\Delta V_{ka}}$ | Ratio of change in reference input voltage to change in cathode to anode voltage $I_k = 10\text{ mA}$, $\Delta V_{KA} = 10\text{ V to } V_{ref}$ $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$ | -2.7 -2 | -1.4 -1 | - - | -2.7 -2 | -1.4 -1 | - - | mV/V |
| I_{ref} | Reference input current $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{amb} = 25\text{ °C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | - - | 1.8 - | 4 6.5 | - - | 1.8 - | 4 6.5 | μA |
| ΔI_{ref} | Reference input current deviation overtemperature range $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{min} \leq T_{amb} \leq T_{max}$ | - | 0.8 | 2.5 | - | 0.8 | 1.2 | μA |
| I_{min} | Minimum cathode current for regulation $V_{KA} = V_{ref}$ | - | 0.5 | 1 | - | 0.5 | 0.7 | mA |
| I_{off} | Off-state cathode current | - | 2.6 | 1000 | - | 2.6 | 1000 | nA |
| $ ZKA $ | Dynamic impedance ⁽²⁾ $V_{KA} = V_{ref}$, $\Delta I_k = 1\text{ to } 100\text{ mA}$, $f \leq 1\text{ kHz}$ | - | 0.22 | 0.5 | - | 0.22 | 0.5 | Ω |

1. See definition of [Section : Reference input voltage deviation overtemperature range](#) below.

2. The dynamic impedance is defined as $|ZKA| = \frac{\Delta V_{KA}}{\Delta I_k}$

Table 6. TL431IY ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

| Symbol | Parameter | TL431IY | | | TL431AIY | | | Unit |
|--|--|--------------|------------|--------------|--------------|------------|--------------|---------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V_{ref} | Reference input voltage $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$ $T_{min} \leq T_{amb} \leq T_{max}$ | 2.44 2.41 | 2.495 - | 2.55 2.58 | 2.47 2.44 | 2.495 - | 2.52 2.55 | V |
| ΔV_{ref} | Reference input voltage deviation overtemperature range ⁽¹⁾ $V_{KA} = V_{ref}$, $I_k = 10\text{ mA}$, $T_{min} \leq T_{amb} \leq T_{max}$ | - | 7 | 30 | - | 7 | 30 | mV |
| $\frac{\Delta V_{ref}}{\Delta V_{ka}}$ | Ratio of change in reference input voltage to change in cathode to anode voltage $I_k = 10\text{ mA}$, $\Delta V_{KA} = 10\text{ V to } V_{ref}$ $I_k = 10\text{ mA}$, $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$ | -2.7 -2 | -1.4 -1 | - - | -2.7 -2 | -1.4 -1 | - - | mV/V |
| I_{ref} | Reference input current $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$ $T_{min} \leq T_{amb} \leq T_{max}$ | - - | 1.8 - | 4 6.5 | - - | 1.8 - | 4 6.5 | μA |
| ΔI_{ref} | Reference input current deviation overtemperature range $I_k = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \infty$, $T_{min} \leq T_{amb} \leq T_{max}$ | - | 0.8 | 2.5 | - | 0.8 | 1.2 | μA |
| I_{min} | Minimum cathode current for regulation $V_{KA} = V_{ref}$ | - | 0.5 | 1 | - | 0.5 | 0.6 | mA |
| I_{off} | Off-state cathode current $T_{min} \leq T_{amb} \leq T_{max}$ | - - | 2.6 | 1000 3000 | - - | 2.6 | 1000 3000 | nA |
| $ ZKA $ | Dynamic impedance ⁽²⁾ $V_{KA} = V_{ref}$, $\Delta I_k = 1\text{ to } 100\text{ mA}$, $F \leq 1\text{ kHz}$ | - | 0.22 | 0.5 | - | 0.22 | 0.5 | Ω |

1. See definition of [Section : Reference input voltage deviation overtemperature range](#) below.


2. The dynamic impedance is defined as $|ZKA| = \frac{\Delta V_{KA}}{\Delta I_k}$

Reference input voltage deviation overtemperature range

ΔV_{ref} is defined as the difference between the maximum and minimum values obtained over the full temperature range.

$$\Delta V_{ref} = V_{ref\ max} - V_{ref\ min}$$

Figure 6. Reference input voltage deviation overtemperature range

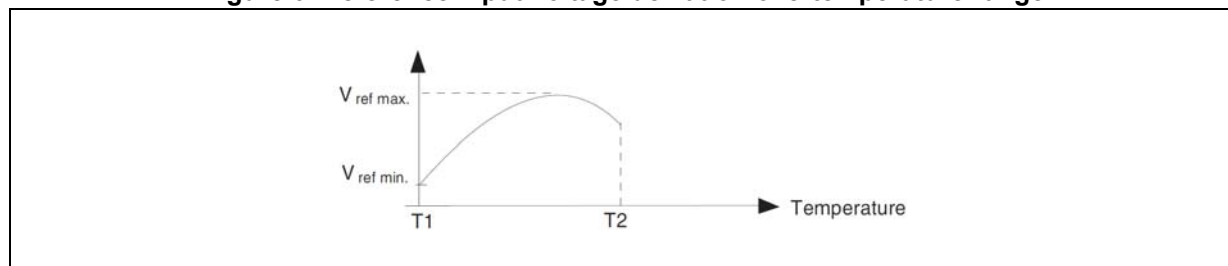

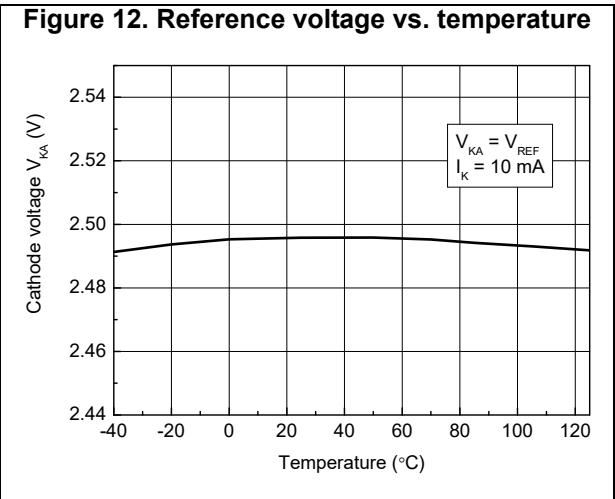
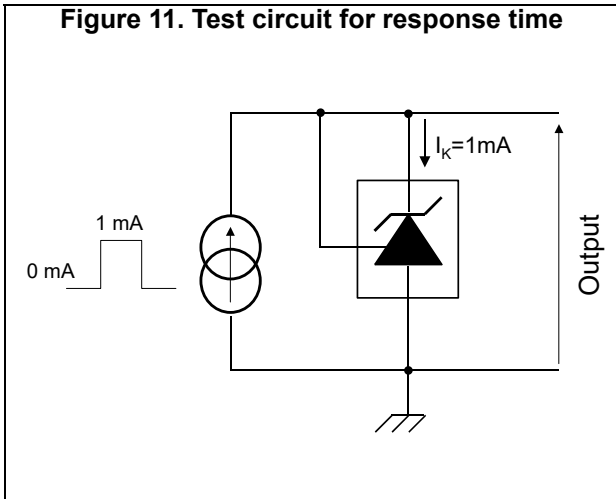
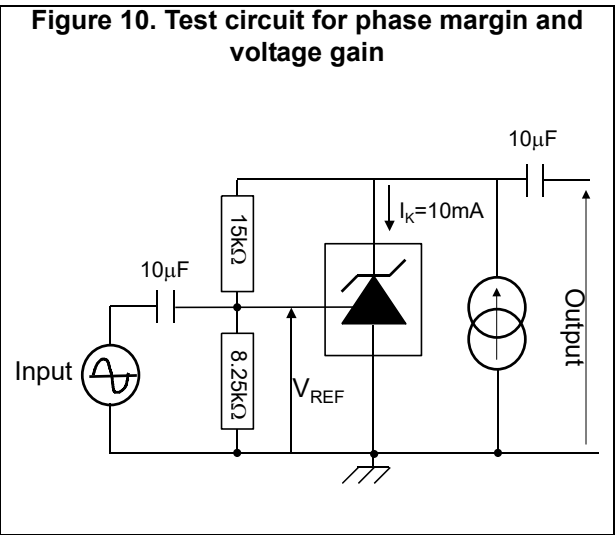
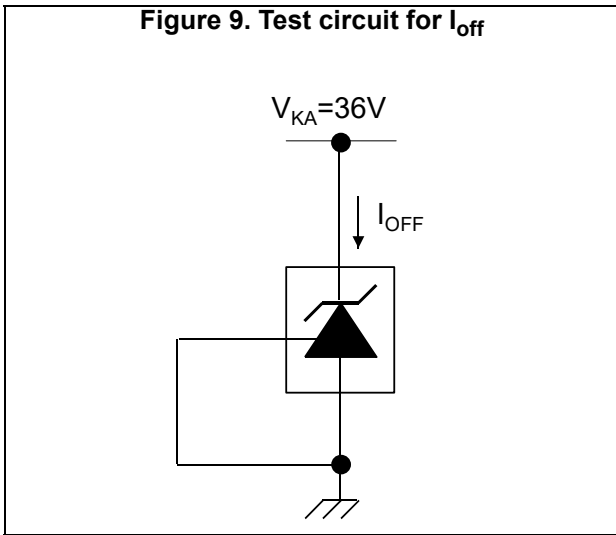
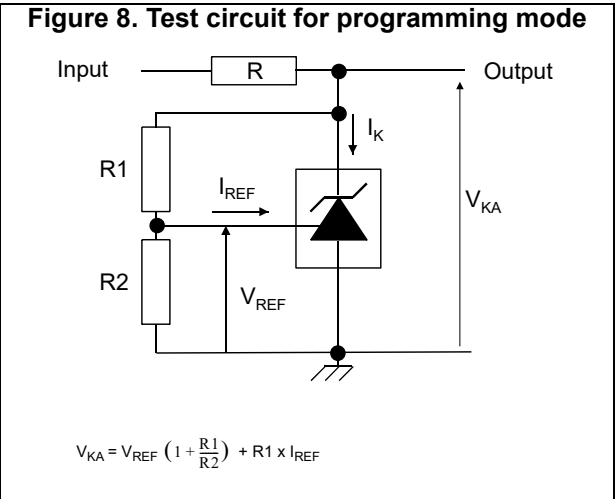
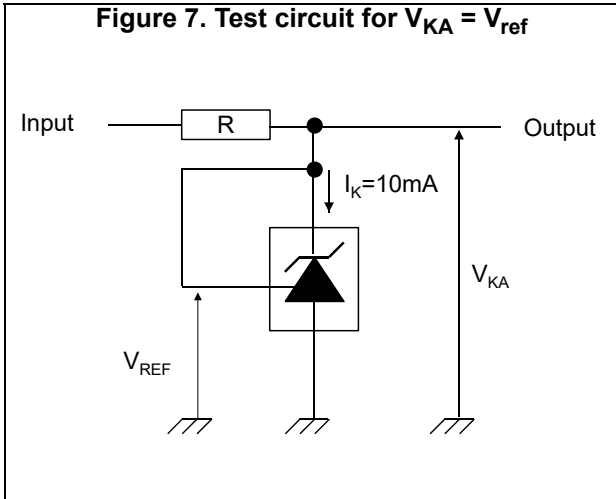


Figure 13. Reference voltage vs. cathode current

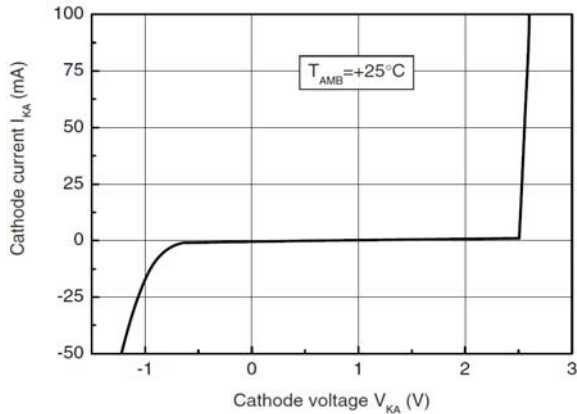


Figure 14. Zoom on reference voltage vs. cathode current

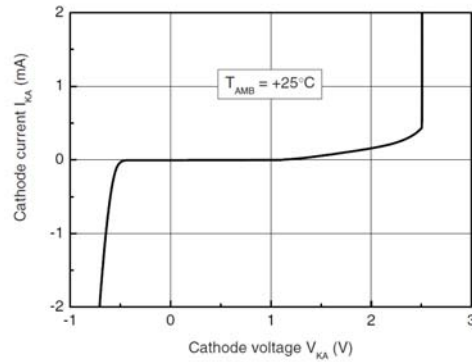


Figure 15. Reference current vs. temperature

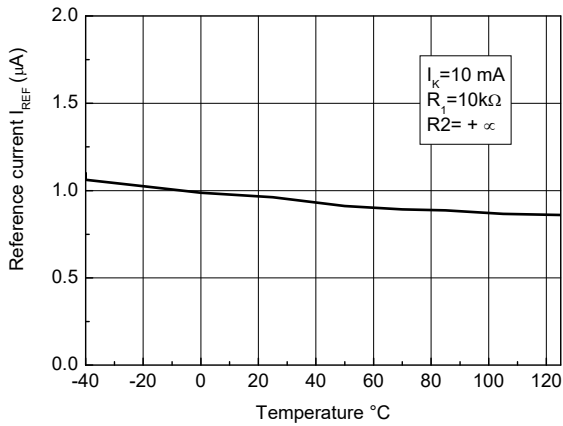


Figure 16. Off-state cathode current vs. temperature

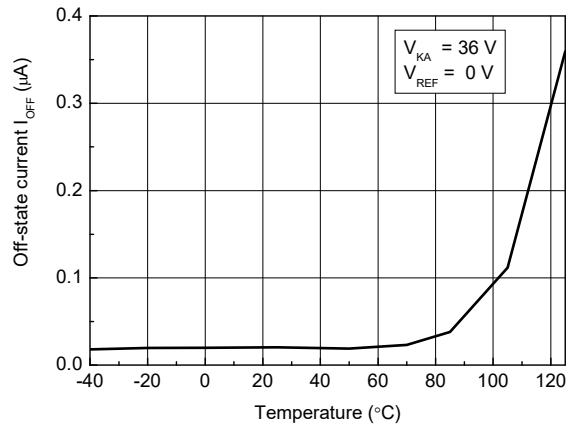


Figure 17. Ratio of change in V_{ref} to change in V_{KA} vs. temperature

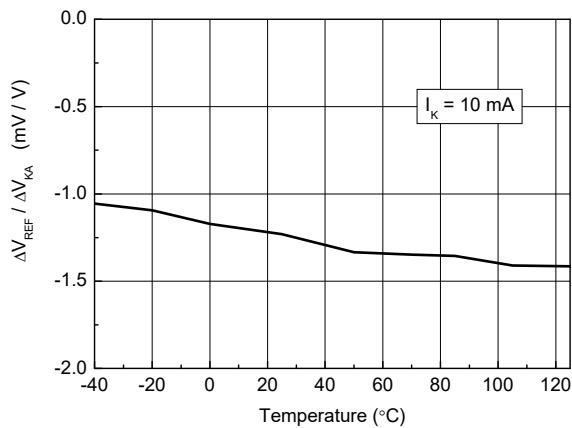


Figure 18. Static impedance R_{KA} vs. temperature

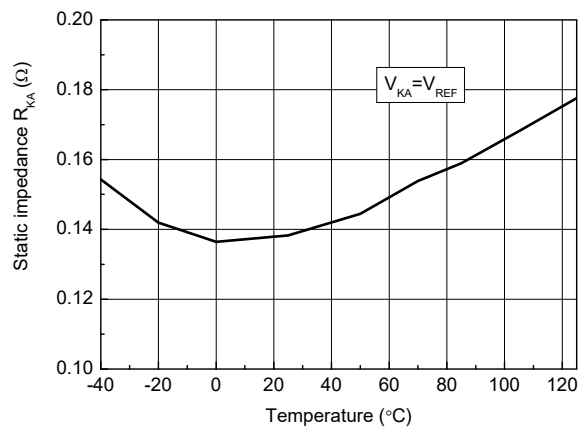


Figure 19. Minimum operating current vs. temperature

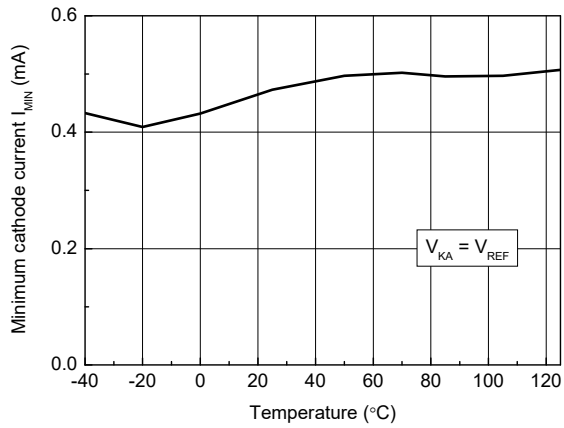


Figure 20. Gain and phase vs. frequency

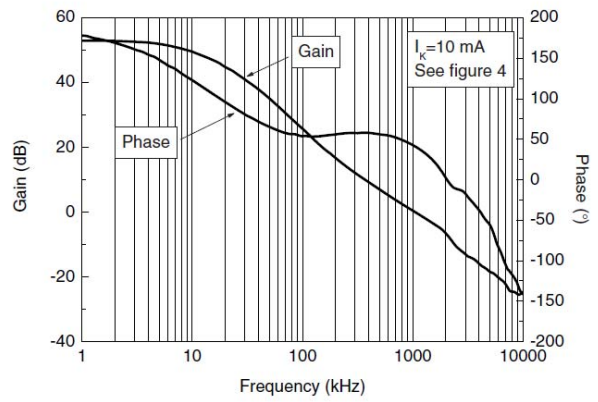


Figure 21. Stability behavior with capacitive loads

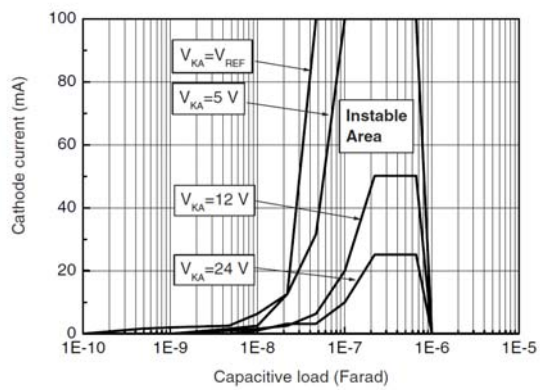


Figure 22. Maximum power dissipation


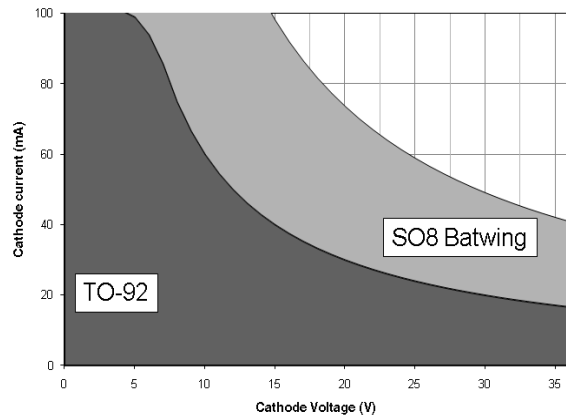


Figure 23. Pulse response for $I_K = 1$ mA

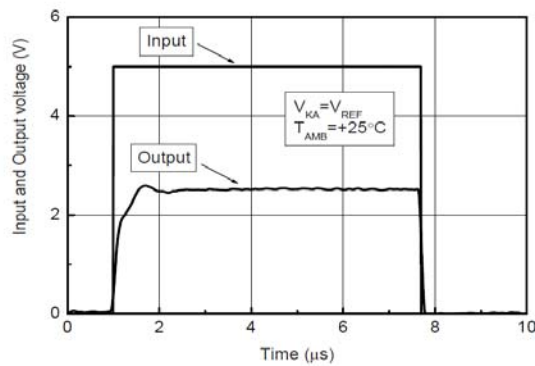

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 SO-8 package information

Figure 24. SO-8 package outline

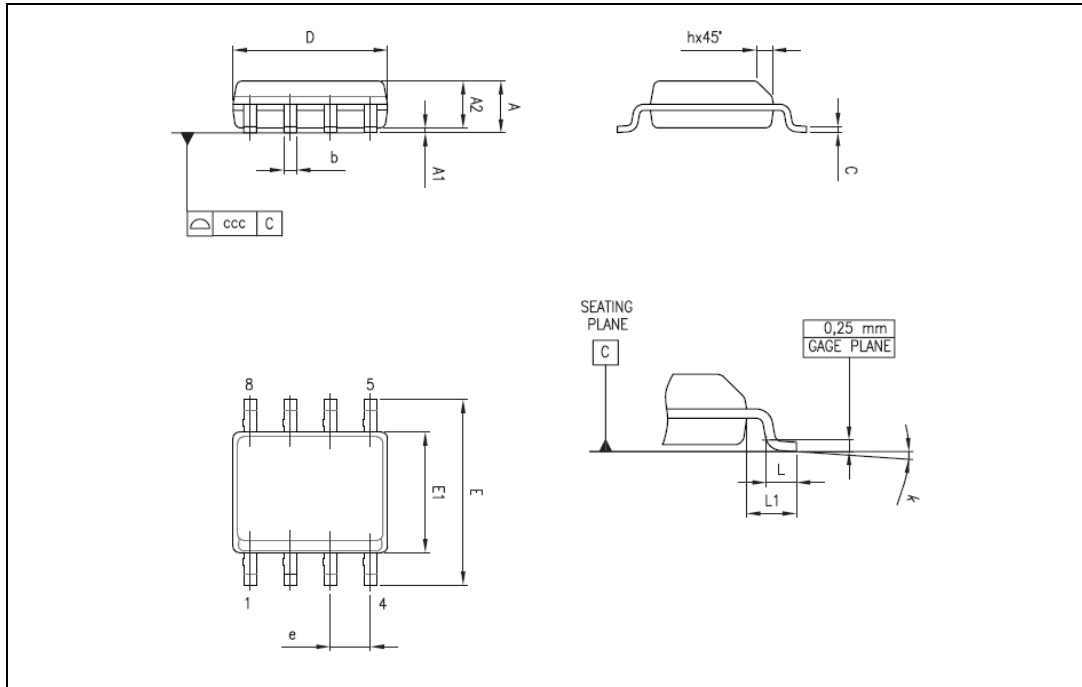


Table 7. SO-8 package mechanical data

| Symbol | Dimensions | | | | | |
|--------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | - | 1.75 | - | - | 0.069 |
| A1 | 0.10 | - | 0.25 | 0.004 | - | 0.010 |
| A2 | 1.25 | - | - | 0.049 | - | - |
| b | 0.28 | - | 0.48 | 0.011 | - | 0.019 |
| c | 0.17 | - | 0.23 | 0.007 | - | 0.010 |
| D | 4.80 | 4.90 | 5.00 | 0.189 | 0.193 | 0.197 |
| E | 5.80 | 6.00 | 6.20 | 0.228 | 0.236 | 0.244 |
| E1 | 3.80 | 3.90 | 4.00 | 0.150 | 0.154 | 0.157 |
| e | - | 1.27 | - | - | 0.050 | - |
| h | 0.25 | - | 0.50 | 0.010 | - | 0.020 |
| L | 0.40 | - | 1.27 | 0.016 | - | 0.050 |
| L1 | - | 1.04 | - | - | 0.040 | - |
| k | 0° | - | 8° | 0° | - | 8° |
| ccc | - | - | 0.10 | - | - | 0.004 |

4.2 TO-92 ammpack and tape and reel package information

Figure 25. TO-92 ammpack and tape and reel package outline

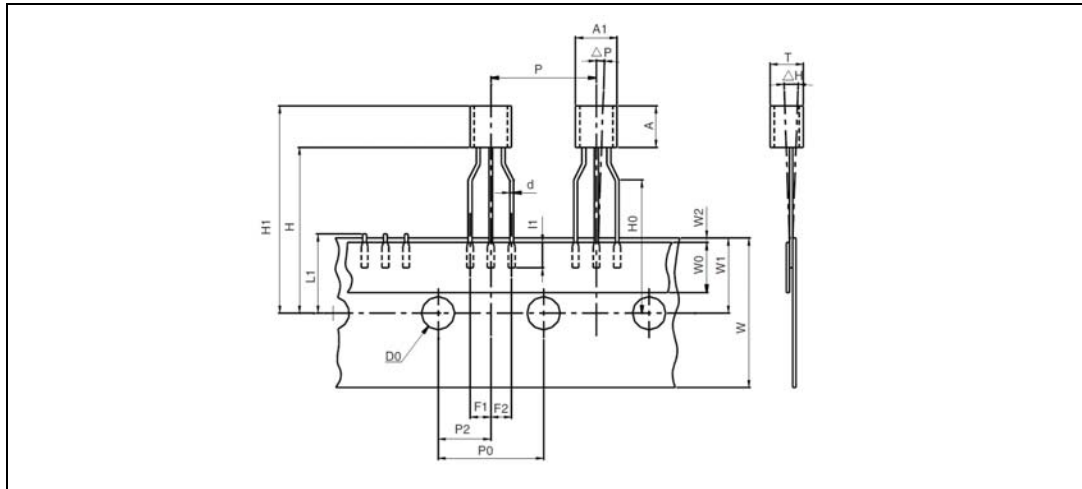


Table 8. TO-92 ammpack and tape and reel package mechanical data

| Symbol | Dimension (millimeters) | | | Dimension (Inches) | | |
|--------|-------------------------|------|------|--------------------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A1 | - | - | 5.0 | - | - | 0.197 |
| A | - | - | 5.0 | - | - | 0.197 |
| T | - | - | 4.0 | - | - | 0.157 |
| d | - | 0.45 | - | - | 0.018 | - |
| I1 | 2.5 | - | - | 0.098 | - | - |
| P | 11.7 | 12.7 | 13.7 | 0.461 | 0.500 | 0.539 |
| P0 | 12.4 | 12.7 | 13 | 0.488 | 0.500 | 0.512 |
| P2 | 5.95 | 6.35 | 6.75 | 0.234 | 0.250 | 0.266 |
| F1/F2 | 2.4 | 2.5 | 2.8 | 0.094 | 0.098 | 0.110 |
| Δh | -1 | 0 | 1 | -0.039 | 0 | 0.039 |
| ΔP | -1 | 0 | 1 | -0.039 | 0 | 0.039 |
| W | 17.5 | 18.0 | 19.0 | 0.689 | 0.709 | 0.748 |
| W0 | 5.7 | 6 | 6.3 | 0.224 | 0.236 | 0.248 |
| W1 | 8.5 | 9 | 9.75 | 0.335 | 0.354 | 0.384 |
| W2 | - | - | 0.5 | - | - | 0.020 |
| H | - | - | 20 | - | - | 0.787 |
| H0 | 15.5 | 16 | 16.5 | 0.610 | 0.630 | 0.650 |
| H1 | - | - | 25 | - | - | 0.984 |
| D0 | 3.8 | 4.0 | 4.2 | 0.150 | 0.157 | 0.165 |
| L1 | - | - | 11 | - | - | 0.433 |

4.3 TO-92 (bulk) package information

Figure 26. TO-92 bulk package outline

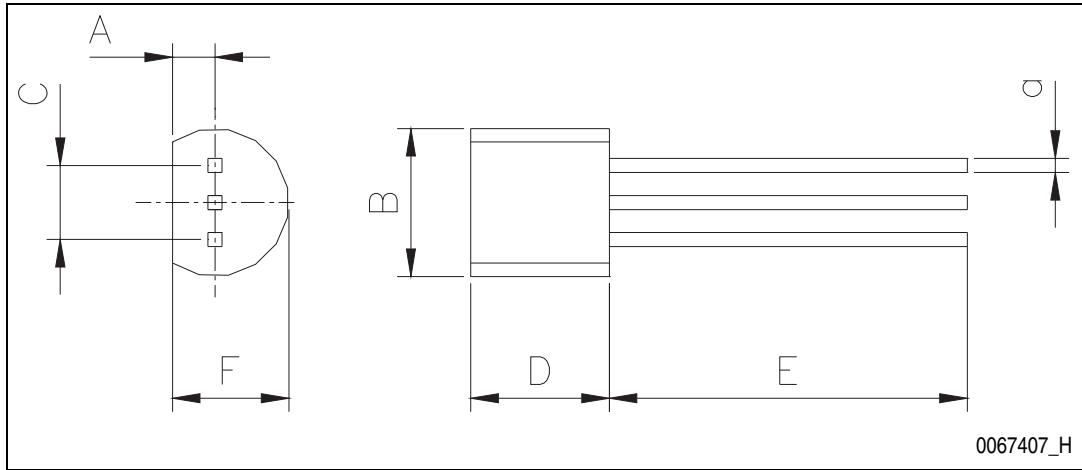


Table 9. TO-92 bulk package mechanical data

| Symbol | Dimension (millimeters) | | | Dimension (Inches) | | |
|--------|-------------------------|------|------|--------------------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | - | 1.35 | - | - | 0.053 | - |
| B | - | - | 4.70 | - | - | 0.185 |
| C | - | 2.54 | - | - | 0.100 | - |
| D | 4.40 | - | - | 0.173 | - | - |
| E | 12.70 | - | - | 0.500 | - | - |
| F | - | - | 3.70 | - | - | 0.146 |
| a | - | - | 0.5 | - | - | 0.019 |

4.4 SOT23-3 package information

Figure 27. SOT23-3 package outline

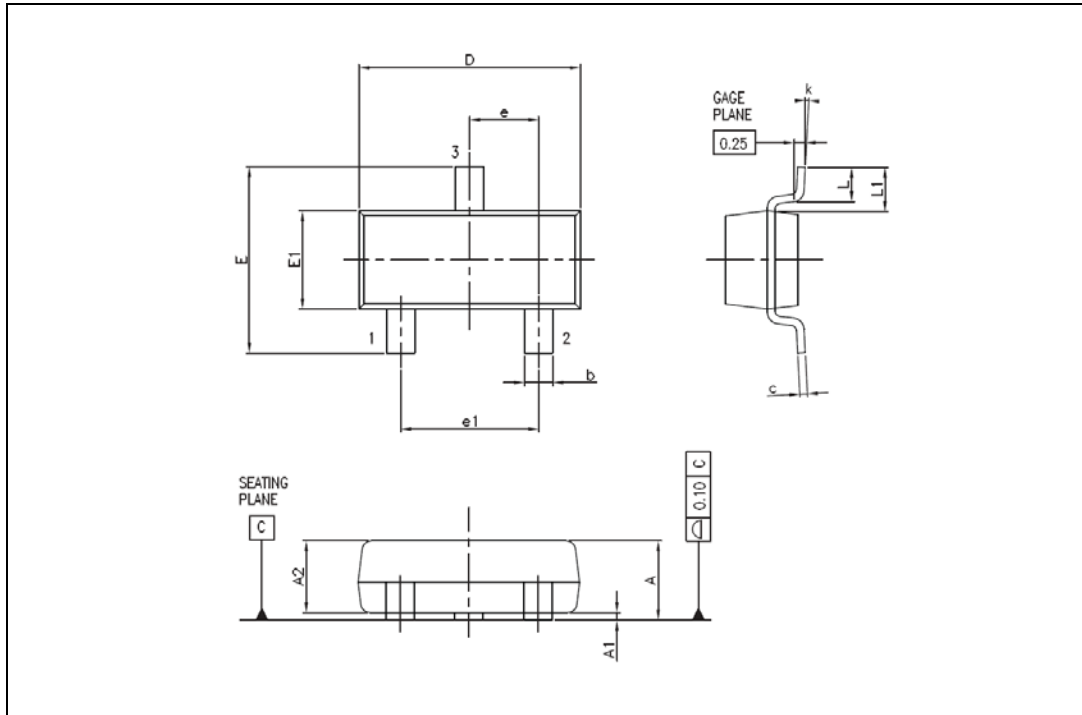


Table 10. SOT23-3 package mechanical data

| Symbol | Dimensions | | | | | |
|--------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 0.89 | - | 1.12 | 0.035 | - | 0.044 |
| A1 | 0.01 | - | 0.10 | 0.0004 | - | 0.004 |
| A2 | 0.88 | 0.95 | 1.02 | 0.035 | 0.037 | 0.040 |
| b | 0.30 | - | 0.50 | 0.012 | - | 0.020 |
| c | 0.08 | - | 0.20 | 0.003 | - | 0.008 |
| D | 2.80 | 2.90 | 3.04 | 0.110 | 0.114 | 0.120 |
| E | 2.10 | - | 2.64 | 0.083 | - | 0.104 |
| E1 | 1.20 | 1.30 | 1.40 | 0.047 | 0.051 | 0.055 |
| e | - | 0.95 | - | - | 0.037 | - |
| e1 | - | 1.90 | - | - | 0.075 | - |
| L | 0.40 | 0.50 | 0.60 | 0.016 | 0.020 | 0.024 |
| L1 | - | 0.54 | - | - | 0.021 | - |
| k | 0d | - | 8d | - | - | - |

4.5 SOT23-5 package information

Figure 28. SOT23-5 package outline


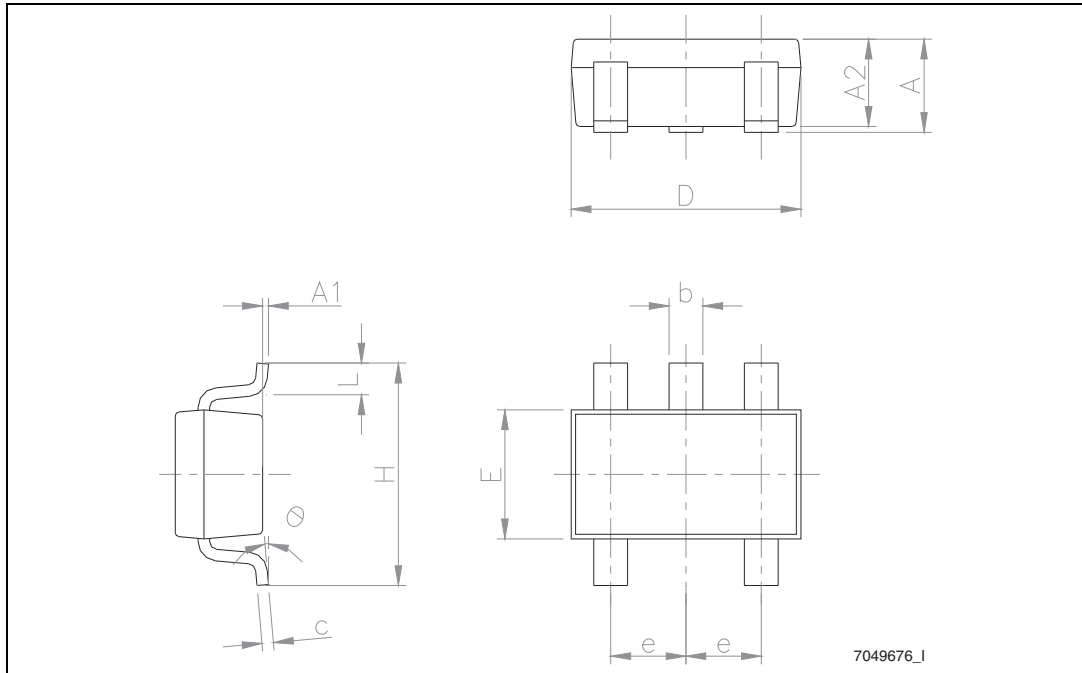


Table 11. SOT23-5 package mechanical data

| Symbol | Dimensions | | | | | |
|--------|-------------|------|------------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 0.90 | - | 1.45 | 0.035 | - | 0.057 |
| A1 | - | - | 0.15 | - | - | 0.006 |
| A2 | 0.90 | - | 1.30 | 0.035 | - | 0.051 |
| b | 0.35 | - | 0.50 | 0.014 | - | 0.020 |
| c | 0.09 | - | 0.20 | 0.004 | - | 0.008 |
| D | 2.80 | - | 3.05 | 0.110 | - | 0.120 |
| E | 1.50 | - | 1.75 | 0.059 | - | 0.069 |
| e | - | 0.95 | - | - | 0.037 | - |
| H | 2.60 | - | 3.00 | 0.102 | - | 0.118 |
| L | 0.10 | - | 0.60 | 0.004 | - | 0.024 |
| θ | 0 degrees | - | 10 degrees | - | - | - |

4.6 SOT323-6 package information

Figure 29. SOT323-6 package outline

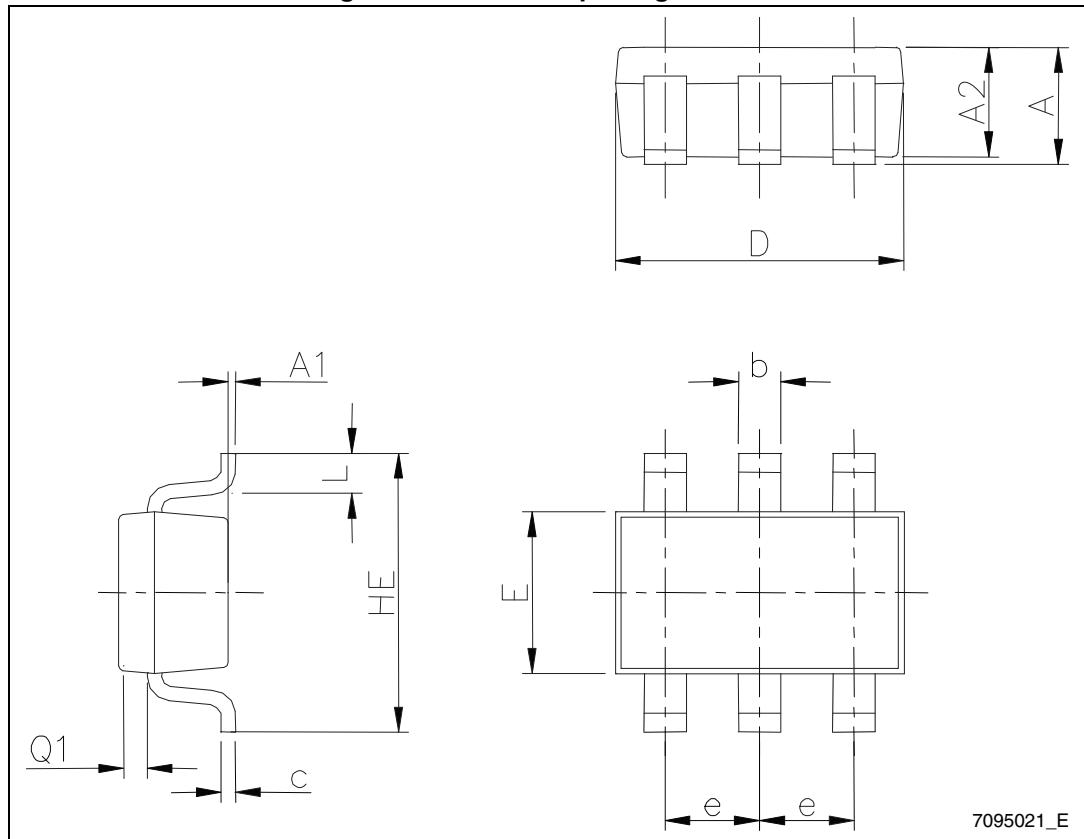

7095021_E

Table 12. SOT323-6 package mechanical data

| Symbol | Dimensions | | | | | |
|--------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 0.80 | - | 1.10 | 0.031 | - | 0.043 |
| A1 | 0 | - | 0.10 | - | - | 0.004 |
| A2 | 0.80 | - | 1.00 | 0.031 | - | 0.039 |
| b | 0.15 | - | 0.30 | 0.006 | - | 0.012 |
| c | 0.10 | - | 0.18 | 0.004 | - | 0.007 |
| D | 1.80 | - | 2.20 | 0.071 | - | 0.087 |
| E | 1.15 | - | 1.35 | 0.045 | - | 0.053 |
| e | - | 0.65 | - | - | 0.026 | - |
| HE | 1.80 | - | 2.40 | 0.071 | - | 0.094 |
| L | 0.10 | - | 0.40 | 0.004 | - | 0.016 |
| Q1 | 0.10 | - | 0.40 | 0.004 | - | 0.016 |

5 Ordering information

Table 13. Order codes

| Order code | Accuracy (%) | Temperature range | Package | Packing | Marking | | |
|--------------------------------------|--------------|-------------------|---------|--------------------------------|---------|--------------------------|-------|
| TL431CD TL431CDT | 2 | 0 °C to +70 °C | SO-8 | Tube or Tape and reel | 431C | | |
| TL431ACD TL431ACDT | 1 | | | | 431AC | | |
| TL431CZ TL431CZT TL431CZ-AP | 2 | | TO-92 | Bulk or Tape or Ammopack | TL431C | | |
| TL431ACZ TL431ACZT TL431ACZ-AP | 1 | | | | TL431AC | | |
| TL431CL3T | 2 | | | SOT23-3 | Tape | L19 | |
| TL431ACL3T | 1 | | | | | L18 | |
| TL431CL5T | 2 | | | SOT23-5 | | L19 | |
| TL431ACL5T | 1 | | | | | L18 | |
| TL431CCT | 2 | | | SOT323-6 | | 31C | |
| TL431ACCT | 1 | | | | | 31C | |
| TL431ID TL431IDT | 2 | -40 °C to +105 °C | | SO-8 | | Tube or tape and reel | 431I |
| TL431AID TL431AIDT | 1 | | | | | | 431AI |
| TL431IZ TL431IZT TL431IZ-AP | 2 | | TO-92 | Bulk or Tape or Ammopack | TL431I | | |
| TL431AIZ TL431AIZT TL431AIZ-AP | 1 | | | | TL431AI | | |
| TL431IL3T | 2 | | | SOT23-3 | Tape | L17 | |
| TL431AIL3T | 1 | | | | | L16 | |
| TL432IL3T | 2 | | | SOT23-3 | | 32I | |
| TL432AIL3T | 1 | | | | | 32AI | |
| TL431IL5T | 2 | | | SOT23-5 | | L17 | |
| TL431AIL5T | 1 | | | | | L16 | |
| TL431ICT | 2 | SOT323-6 | | 31I | | | |
| TL431AICT | 1 | | | 31I | | | |
| TL431BL3T | 0.5 | -40 °C to +125 °C | SOT23-3 | | 1B | | |

Table 13. Order codes (continued)

| Order code | Accuracy (%) | Temperature range | Package | Packing | Marking |
|---|--------------|-------------------|----------------------------------|--------------------------|---------|
| TL431IYD ⁽¹⁾ TL431IYDT ⁽¹⁾ | 2 | -40 °C to +125 °C | SO-8 (Automotive grade level) | Tube or tape and reel | 431IY |
| TL431AIYD ⁽¹⁾ TL431AIYDT ⁽¹⁾ | 1 | | | | 431AIY |

1. Qualification and characterization according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.

6 Revision history

Table 14. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 01-Mar-2002 | 1 | Initial release. |
| 01-Nov-2005 | 2 | PPAP references inserted in order codes table on cover page. |
| 13-Dec-2006 | 3 | Corrected TO-92 package information. |
| 08-Jun-2007 | 4 | Specified that SO-8 package is batwing package. In electrical characteristics tables, moved negative values from max column to min column. Corrected captions of <i>Figure 7</i> and of <i>Figure 18</i> . Added footnote to <i>Table 8: TO-92 bulk package mechanical data</i> . |
| 25-Feb-2008 | 5 | Corrected SO-8 package mechanical data. Corrected footnote for automotive grade order codes in order code table. Corrected packing information for TO-92 devices in order code table. |
| 04-Jun-2009 | 6 | Changed I_{MIN} to 0.6 mA in <i>Table 3</i> and <i>Table 4</i> . Increased temperature range to 125°C in temperature curves. Added <i>Table 5</i> , dedicated to automotive version. Increased high temperature for automotive range up to +125 °C in <i>Table 5</i> and in <i>Table 12: Order codes</i> . Inserted accuracy column in <i>Table 12</i> . |
| 09-Jun-2009 | 7 | Corrected minor error in package column in <i>Table 12</i> . |
| 14-Mar-2011 | 8 | Added <i>Figure 3</i> on page 3, <i>Section 4.4</i> on page 15 and <i>Section 4.5</i> on page 16. |
| 07-Oct-2011 | 9 | Added new package mechanical data <i>Table 11</i> on page 17 and <i>Figure 29</i> on page 17. Updated <i>Table 12</i> on page 18. |
| 17-Nov-2011 | 10 | Added new part number TL432, new order code <i>Table 12</i> on page 18 and pin connection for TL432 <i>Figure 3</i> on page 3. |
| 03-Dec-2012 | 11 | Removed temperature range in title <i>Table 3</i> on page 5, <i>Table 4</i> on page 6 and <i>Table 5</i> on page 7. |
| 07-Dec-2017 | 12 | Updated main title on page 1 and <i>Section : Features</i> on page 1, (added "automotive" - AEC-Q100 qualified). Updated <i>Table 1</i> on page 4 (updated R_{thja} and R_{thjc}). Minor modifications throughout document. |
| 10-Sep-2020 | 13 | Added the part number TL431B and all its occurrences throughout the document. |
| 23-Sep-2020 | 14 | Updated <i>Table 4</i> : TL431B ($T_{amb} = 25\text{ °C}$ unless otherwise specified). |
| 08-Feb-2021 | 15 | Updated Table 13: Order codes . |