

MODEL TLH-5955



International size reference: 2/3AA, ER14335

TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)



| | |
|--|-------------------|
| ■ Nominal capacity @ 1.3 mA, to 2 V | 1.40 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 75 mA |
| ■ Maximum pulse current capability | 150 mA |
| ■ Weight | 12.5 g (0.441 oz) |
| ■ Volume | 5.2 cc |
| ■ Operating temperature range | -55 °C to +125 °C |
| ■ Li metal content | approx. 0.5 g |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN
LITHIUM
BATTERIES

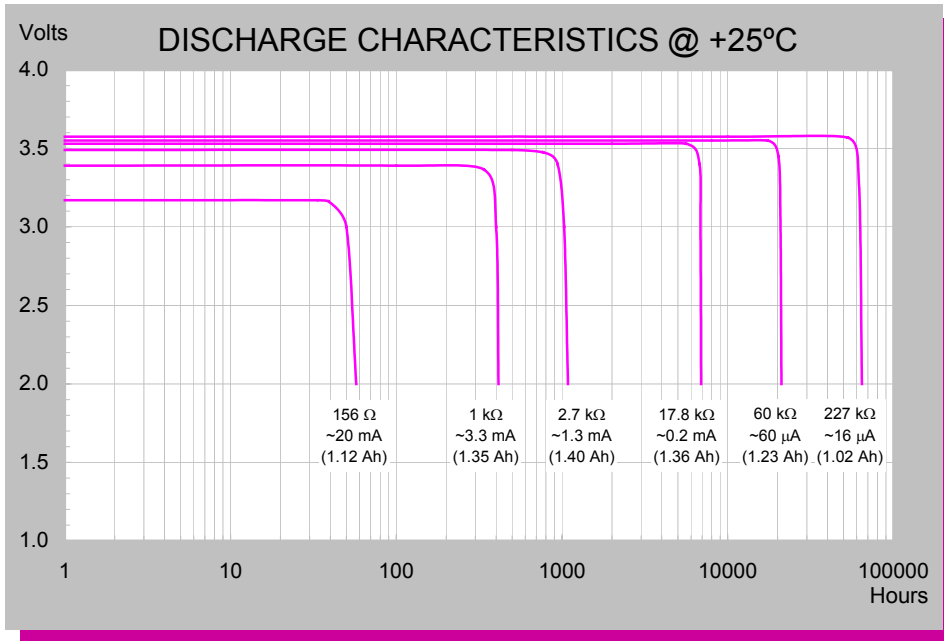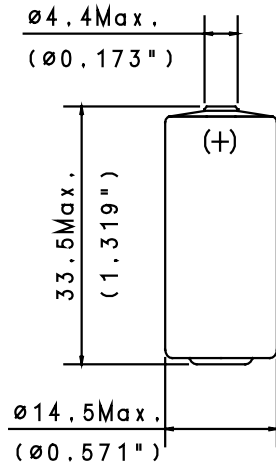

TERMINATIONS & ORDERING NO.

| | |
|----------------------------|---------------|
| SUFFIX- /S STANDARD | 15-5955-21505 |
| SUFFIX- /T SOLDER TABS | 15-5955-31505 |
| SUFFIX- /P AXIAL PINS | 15-5955-41505 |
| SUFFIX- /PT2 RADIAL PINS | 15-5955-36505 |
| SUFFIX- /TP POLARIZED TABS | 15-5955-52505 |
| SUFFIX- /PT POLARIZED TABS | 15-5955-53505 |

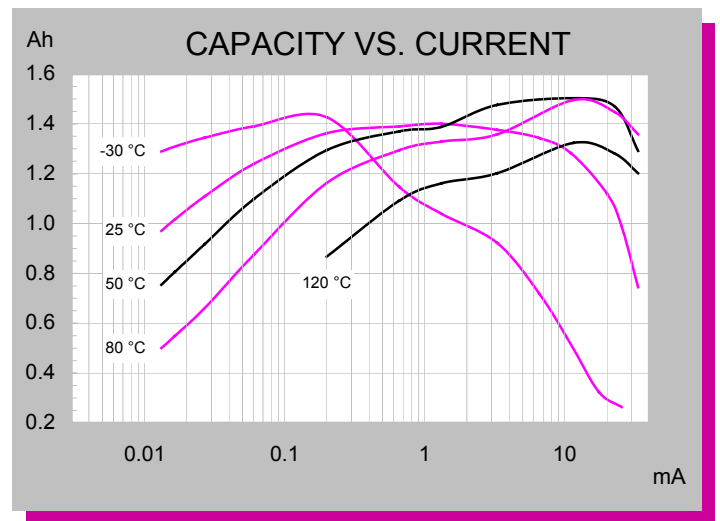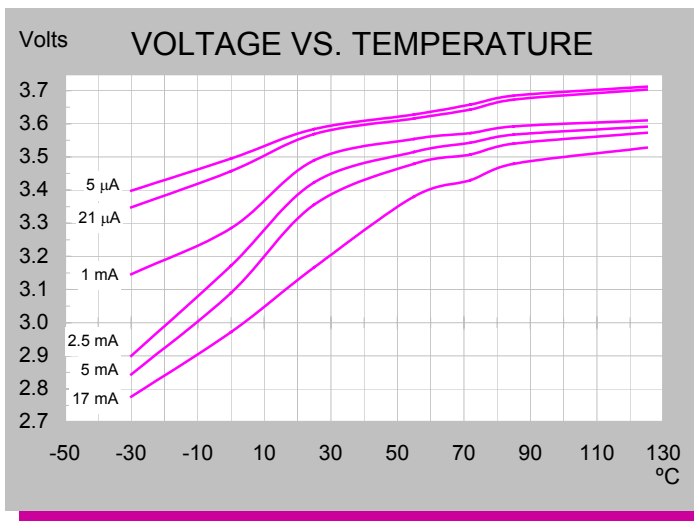

Extended Temperature Range

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501187 Rev. A 01/06