

# MODEL TLP-97311/A/SM

Ordering: P/N 61973111600

Termination: Pressure Contacts

## TECHNICAL DATA


(Typical values @+25°C for batteries stored for one year or less)

■ Capacity to 3.0V (@250mA @1% duty cycle)	1.65 Ah
■ Nominal voltage	3.6 V
■ Maximum 1 second pulse to 3.0V	1 A
■ Maximum pulse length @125mA to 2.8V	1000 sec
■ Delay time to 3.0V @125mA	No Delay
■ Weight	35 gr
■ Operating temperature range	-40°C to +85°C
■ Capacity retention after 10 years	85%



**TADIRAN  
LITHIUM  
BATTERIES**

**PulsesPlus™**

- HIGH ENERGY
- UP TO 1A PULSE CAPABILITY
- INSTANT VOLTAGE RESPONSE
- NO PASSIVATION EFFECT

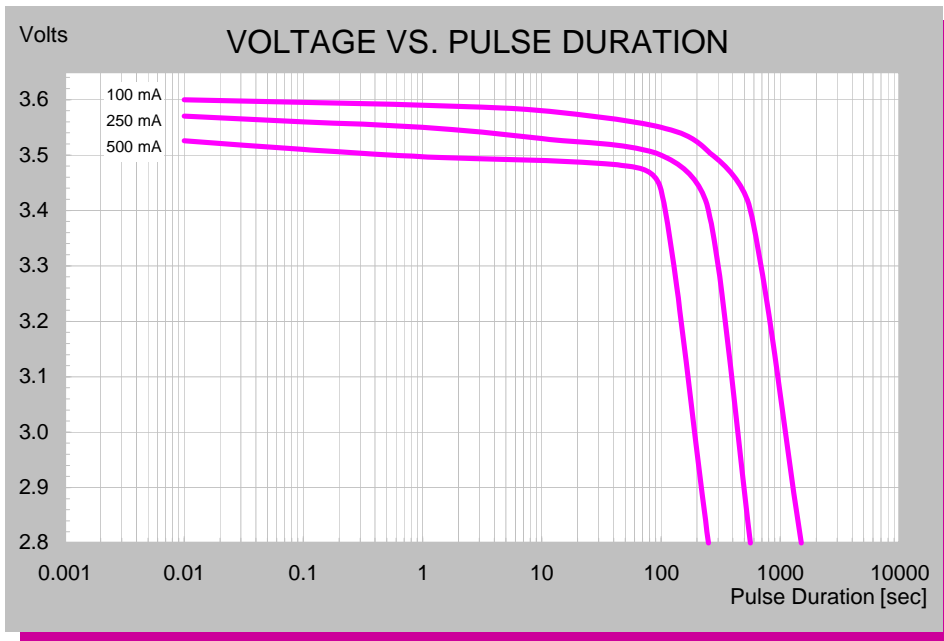

Diameter (max.) – 16.5 mm  
Length (max.) – 58 mm

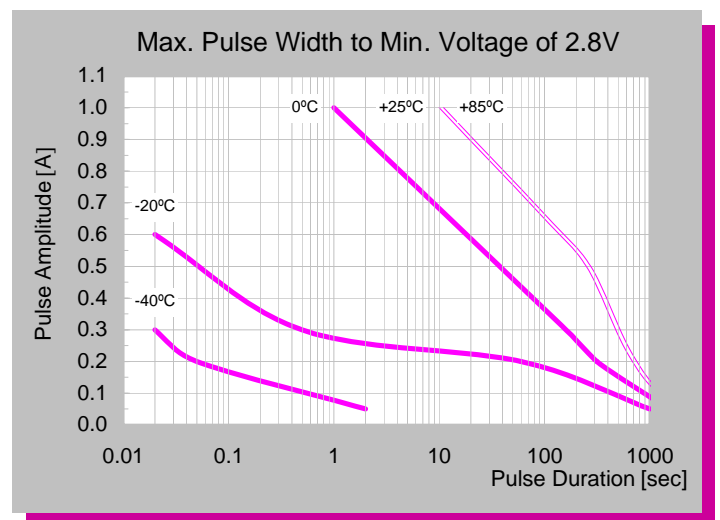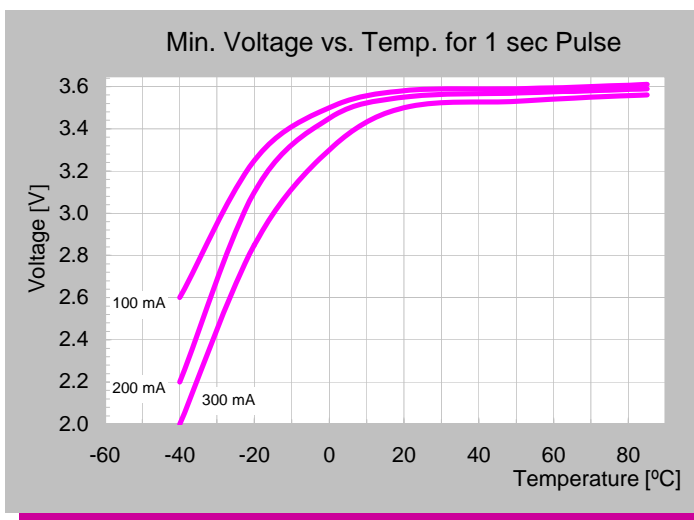


*For High Pulse Current Applications*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 6100625 Rev. D June/07

# MODEL TLP-97311/A/SM





The battery is designed specifically for applications requiring low background currents combined with high current pulses. The Pulses Plus™ battery combines the inherent benefits of bobbin type Lithium Thionyl Chloride cell with a novel hermetically sealed Hybrid Layer Capacitor (HLC). The addition of the HLC enhances the performance of the Lithium Thionyl Chloride cell to meet large pulse current requirements, thus providing greater performance and safety in comparison to jellyroll construction (spirally wound) type batteries.

\* The PTC is optional and not necessary in many cases.

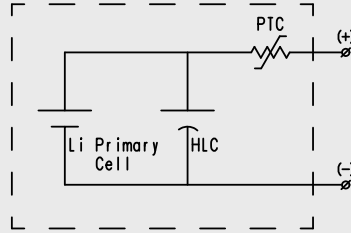

*TADIRAN*  
*LITHIUM*  
*BATTERIES*

**PulsesPlus™**

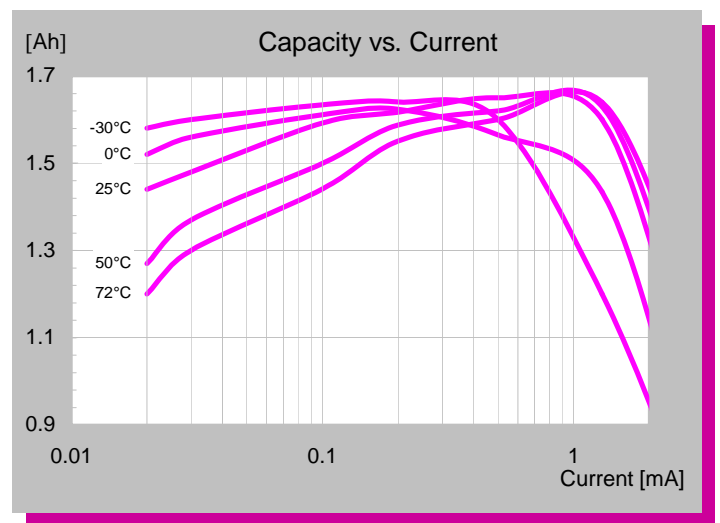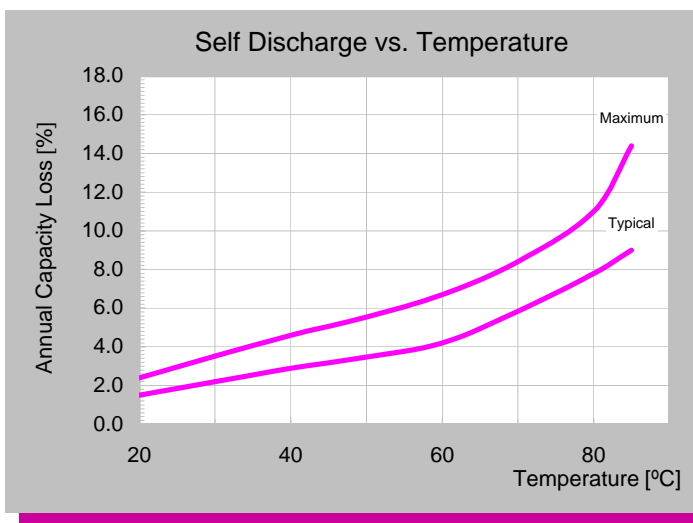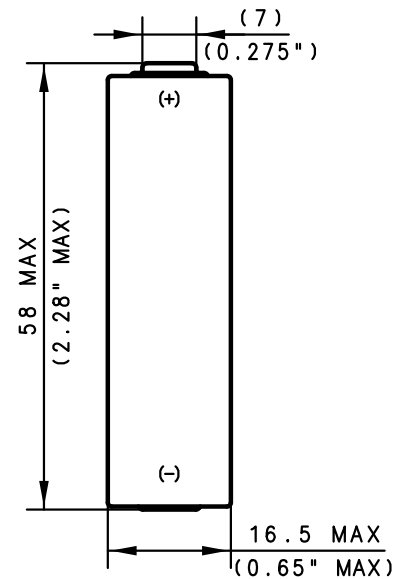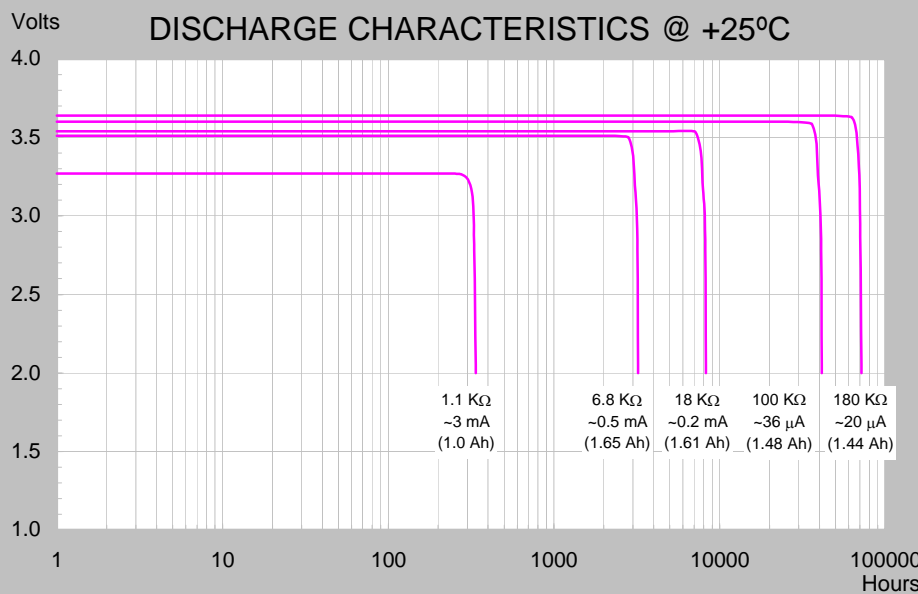

*For High Pulse Current Applications*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.  
ECN 6100625 Rev. D June/07