



		1	
Part Number:		DRAWN	6/10/2021
TD100	2240 4	CJ	6/10/2021
17103	3210-1	CHECKED	6/10/2021
		P.D.	0/10/2021
Description:	anadu aan	APPROVED	6/10/2021
Plezo Ir	ansducer	J.S.	6/10/2021

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

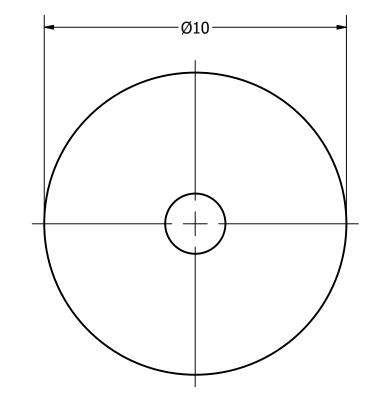

Side View

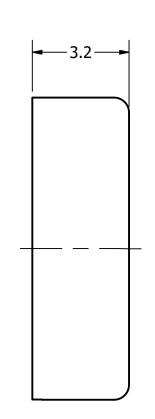

Bottom View

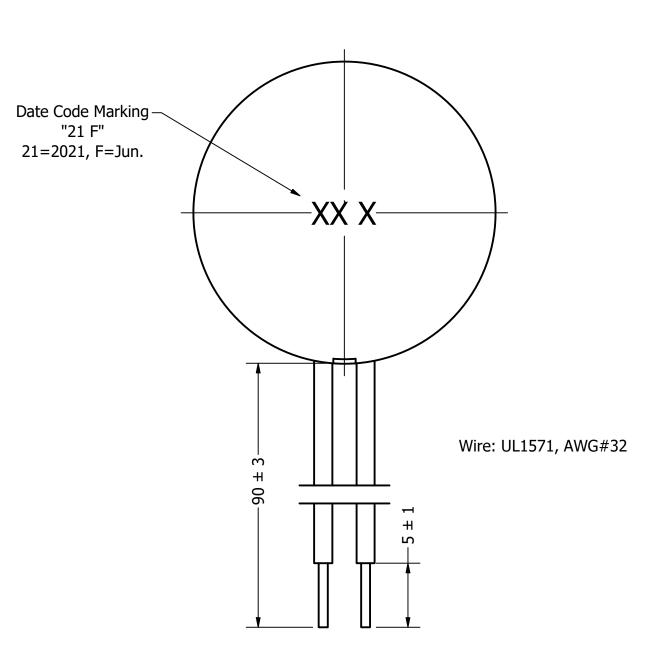

Items	Specifications	Conditions					
Min. Sound Pressure Level	80	dB (@ 10cm)					
Resonant Frequency	3,200	Hz					
Rated Voltage	10	V					
Voltage Range	1 ~ 30	V	REVISION HISTORY				
Capacitance	11,000	pF	REV	DESCRIPTION	DATE	APPROVED	
Max. Rated Current	7	mA		Released from Engineering	10/21/2013	J.S.	
Storage Temperature	-20 ~ +70	°C	1	Updated to new template	6/10/2021	J.S.	
Operating Temperature	-20 ~ +60	°C	NOTES				
Connection Method	Lead Wires	1) All dimensions are in mm unless otherwise noted					
Mount Type	Flush Mount	2) All tolerances are ± 0.5 mm unless otherwise noted					
Housing Material	ABS	3) All parts meet RoHS					
Weight	1	g 4) Subject to change or redrawn without notice					

4 2