



TOP VIEW

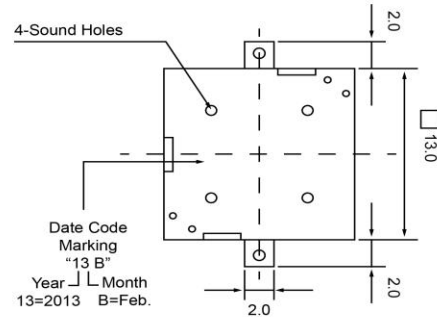

SIDE VIEW



Specifications

Description	Value	Unit
Technology	Piezo	
Resonant Frequency	4,100	(Hz)
Rated Voltage	5	(V)
SPL @ 10cm (min.)	75	(dBA)
Capacitance	16,000	(pF)
Mount Type	Surface Mount	
Max Voltage	30	(V)
Max Rated Current	5	(mA)
Housing Material	LCP	
Operating Temperature	-20 ~ +105	°C
Storage Temperature	-30 ~ +105	°C
Weight	0.5	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



Revision History

Version	Description	Date	Approved		
1	Released from Engineering	4/3/2015	J.S.		
Drawn by	Date	Checked by	Date	Approved by	Date
G.W.	4/1/2015	C.E.	4/2/2015	J.S.	4/2/2015

High Temp Piezo Transducer

TP134105-1

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).