



		<b>1</b>		
Part Number:		DRAWN	0/7/2017	
TD1 42	220E 4	CJ	8/7/2017	
17143	3305-1	CHECKED	8/9/2017	
		P.D.	0/3/2017	
Description:	ansducer	APPROVED	8/9/2017	
Plezo II	ansuucei	C.E.	6/9/2017	

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View

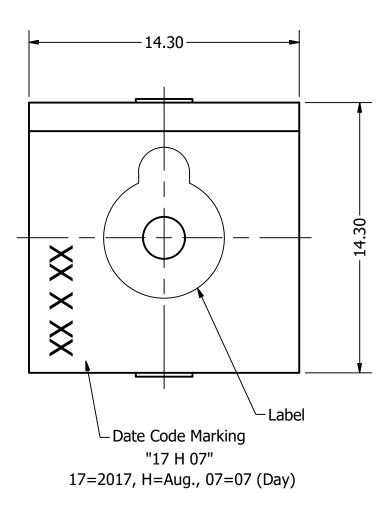

## Side View

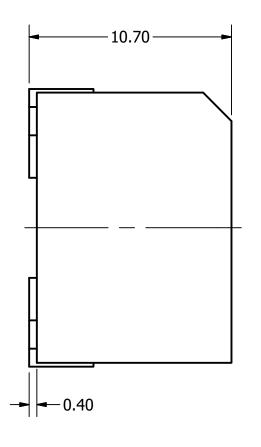

## **Bottom View**

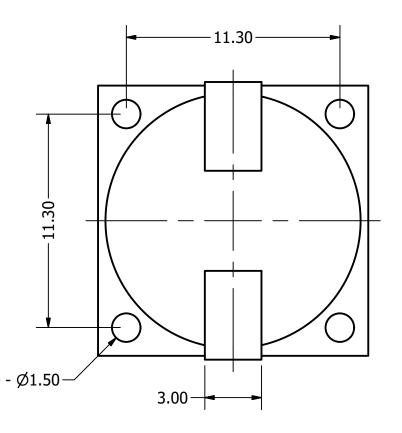

Items	Specifications	Conditions					
Min. Sound Pressure Level	80	dB (@ 10cm)					
Resonant Frequency	3,300	Hz		DEL/ICION LITETORY	,		
Rated Voltage	5	Vp-p	REVISION HISTORY				
Voltage Range	1 ~ 20	Vp-p	REV	DESCRIPTION	DATE	APPROVED	
				Released from Engineering	10/21/2013	J.S.	
Capacitance	15,000	pF		Updated template, new location and day added to date	8/9/2017	СГ	
Max. Rated Current	5	mA	1	code	8/9/2017	C.E.	
Storage Temperature	-20 ~ +70	°C	NOTES				
Operating Temperature	-20 ~ +70	°C	1) All dimensions are in mm unless otherwise noted				
Connection Method	Surface Mount Pads	2) All tolerances are ± 0.5 mm unless otherwise noted					
Mount Type	Surface Mount	3) All parts meet RoHS					
Housing Material	PPS		4) Subject to change or redrawn without notice				
147 T L 1	_						