



TOP VIEW





SIDE VIEW

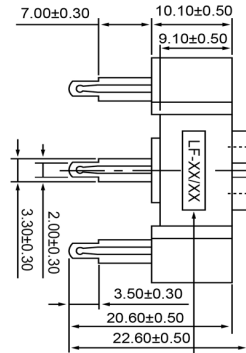

Date Code Marking  
 "LF-XXXX"  
 Year | Month  
 13=2013 L=Dec.

BOTTOM VIEW



Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	2,700	(Hz)								
Rated Voltage	12	(V)								
SPL @ 10cm	75	(dBA)								
Capacitance	30,000	(pF)								
Mount Type	Thru Hole									
Voltage Range	1.5 ~ 24	(V)								
Max Rated Current	75	(mA)								
Housing Material	PBT									
Operating Temperature	-20 ~ +105	°C								
Storage Temperature	-30 ~ +105	°C								
Weight	5	(g)								
 <b>DB UNLIMITED</b>			<b>Piezo Transducer</b>			<b>TP302712-1</b>				

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).