



Part Number:	TP441009-1	
	DRAWN	10/12/2015
	CJ	
Description:	CHECKED	5/13/2016
	P.D	
	APPROVED	5/13/2016
J.S		
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at <a href="http://www.dbunlimitedco.com">www.dbunlimitedco.com</a>		

Side View



Top View

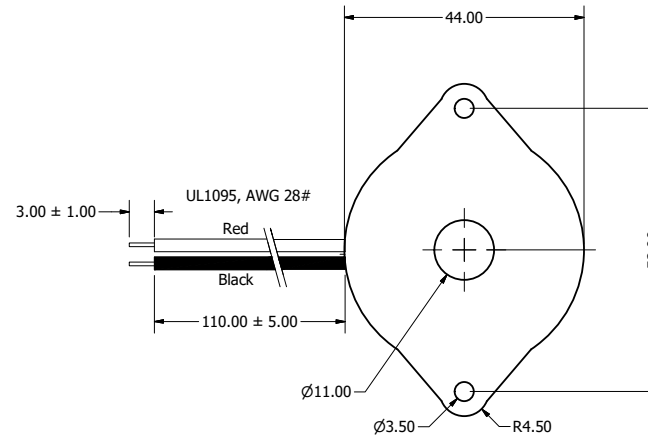

Items	Specifications	Conditions
Sound Pressure Level	85	dB (@ 10cm)
Resonant Frequency	1,000	Hz
Rated Voltage	9	V
Voltage Range	1 ~ 30	V
Capacitance	68,000	pF (@120Hz)
Max. Rated Current	3	mA
Storage Temperature	-30 ~ +70	°C
Operating Temperature	-20 ~ +60	°C
Connection Method	Lead Wires	
Mount Type	Flange Mount	
Housing Material	ABS	
Weight	10	g

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1	Released from Engineering	10/21/2013	J.S.
1	Updated to new template	10/12/2015	J.S.
2	Corrected dimensions	10/24/2015	J.S.

- NOTES
- 1) All dimensions are in mm unless otherwise noted
  - 2) All tolerances are ± 0.5 mm unless otherwise noted
  - 3) All parts meet RoHS
  - 4) Subject to change or redrawn without notice