



Our patented Phantom® is a rugged antenna for outdoor or indoor applications. The Phantom® revolutionary design features field diversity with both vertical and horizontal polarization components. This gives the antenna diversity, frequency agility, low visibility, wide bandwidth and a low angle radiation pattern that is superior to traditional gain antennas in most applications.

The industry standard NMO mounting socket mates with all Antenex® magnetic, trunk lid, and hole mounts. The Phantom® patented technology is beneficial when high performance is desired and ruggedness and low profile is required.

FEATURES AND BENEFITS

- Easy installation with optional NMO mounts
- UV-treated radome resists sun damage

APPLICATIONS

- FirstNet/Public Safety
- Transportation
- Industrial and commercial communications

ELECTRICAL SPECIFICATIONS

Model Name	TRA(B)T1500
Operating Frequency (MHz)	150-168 MHz (field tunable starting at 150 MHz)
Frequency Bandwidth (MHz)	2.0
VSWR (dBi)	<2:1
Return Loss (dB) – minimum	-10
Gain (dBi)	Unity
Elevation = 45°	-5
Elevation = 90°	-11
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	60
Polarization	Vertical
Pattern	Omnidirectional
Vertical Plane 3 dB Beamwidth	120°
Tuning	Tunable coil with tuning key provided

MECHANICAL SPECIFICATIONS

Dimensions – W x H – mm (inches)	xx x xx (3¼ x 3½)
Weight – kg (lbs.)	Xx (0.25)
Cable Type	None
Finish	ABS
Color	White or Black
Mounting	4' x 4' Metallic Ground Plane

ENVIRONMENTAL SPECIFICATIONS


Operating Environment (Indoor or Outdoor)	Indoor and Outdoor
Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Lightning Protection	AC Ground

CONFIGURATION


PART NUMBER	COLOR	CONNECTOR
TRAT1500	White	NMO
TRA(B)T1500	Black	NMO

RADIATION PATTERNS

Representative Azimuth Field Pattern

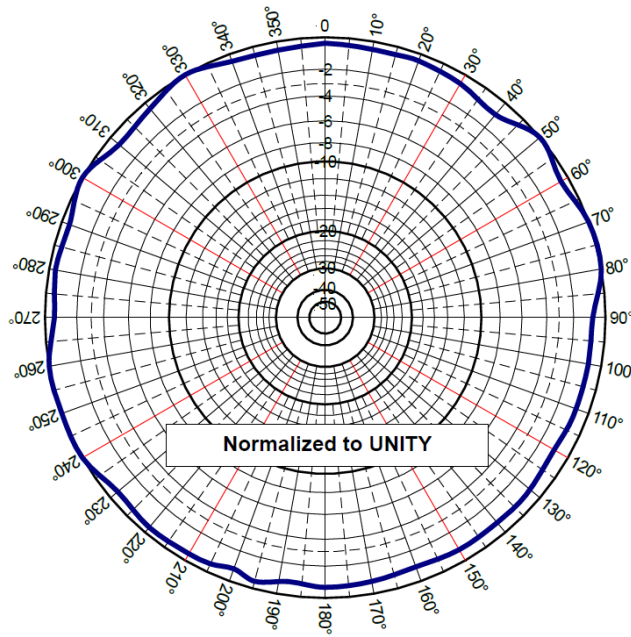

Elevation Pattern (Z, Y, or H-plane)

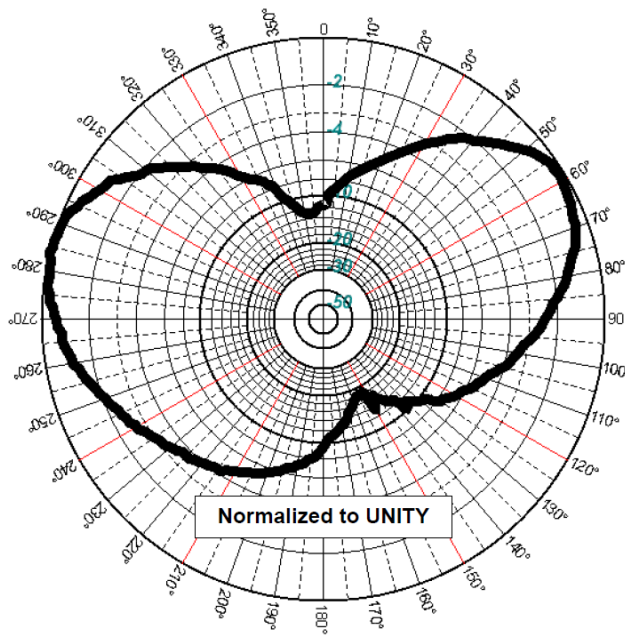

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

