

100mA, 75V Switching Diode

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: 0603(Ceramics)
- Molding compound meets UL flammability classification rating 94HB
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 2.7 mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I _F	100	mA
V _{RRM}	75	V
I _{FSM}	0.8	A
V _F at I _F =10mA	1.00	V
V _F at I _F =100mA	1.25	V
T _J Max.	150	°C
Package	0603 (Ceramics)	
Configuration	Single die	



ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Repetitive peak reverse voltage	V _{RRM}	75	V
Mean forward current	I _F	100	mA
Non-repetitive peak forward surge current	at t < 1s	0.4	A
	at t ≤ 8.3ms	0.8	
Junction temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{STG}	-55 to +150	°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP.	UNIT
Junction-to-ambient thermal resistance	$R_{\Theta JA}$	375	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	TYP.	MAX.	UNIT
Forward voltage per diode ⁽¹⁾	$I_F=10mA, T_J=25^\circ C$	V_F	-	1.00	V
	$I_F=100mA, T_J=25^\circ C$		-	1.25	
Reverse current @ rated V_R per diode ⁽²⁾	$V_R=20V, T_J=25^\circ C$	I_R	-	25	nA
	$V_R=75V, T_J=25^\circ C$		-	5	μA
Reverse recovery time	$I_F=10mA, I_R=10mA, R_L=100\Omega$	t_{rr}	-	4	ns
Junction capacitance	1 MHz, $V_R=0V$	C_J	-	4	pF

Notes:

1. Pulse test with PW=0.3 ms
2. Pulse test with PW=30 ms

ORDERING INFORMATION

ORDERING CODE	PACKAGE	PACKING
TS4148C RZG	0603	5K / 7" Reel
TS4148C RCG		10K / 13" Reel

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Typical Forward Characteristics

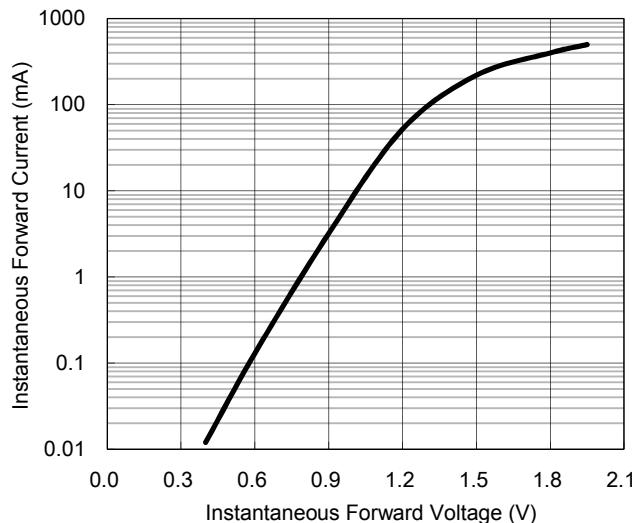


Fig. 2 Typical Reverse Characteristics

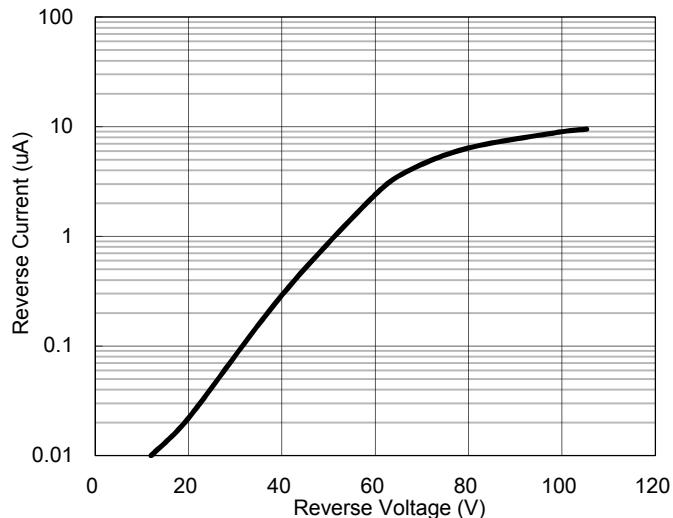


Fig. 3 Admissible Power Dissipation Curve



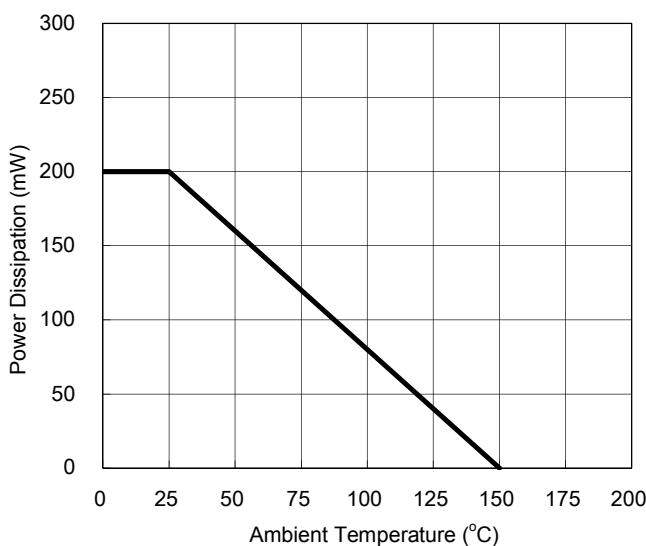


Fig. 4 Typical Junction Capacitance

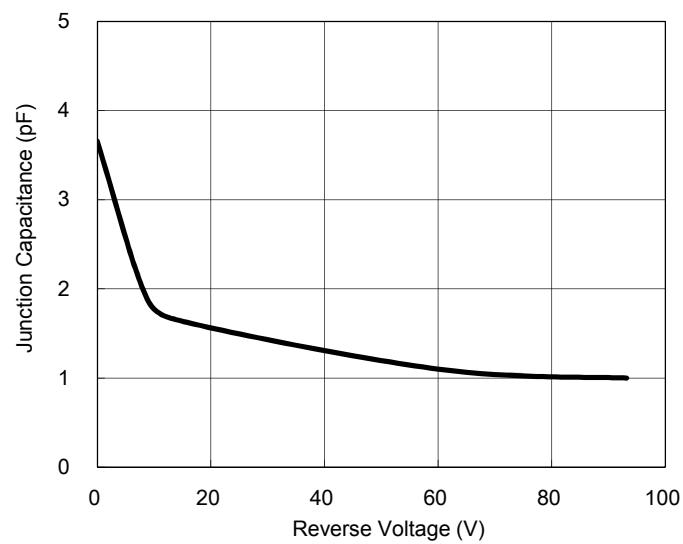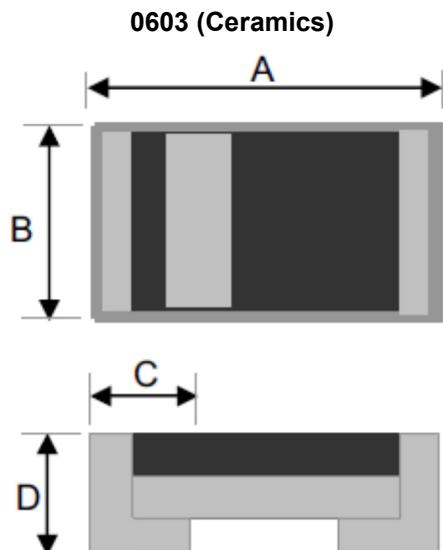

PACKAGE OUTLINE DIMENSION

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.45	1.65	0.057	0.065
B	0.70	0.90	0.028	0.035
C	0.25	0.45	0.010	0.018
D	0.55	0.75	0.022	0.030