

## 8A, 200V - 1000V Standard Surface Mount Rectifier

### FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- Wettable flank
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- DC to DC converter
- Switching mode converters and inverters
- General purpose


### MECHANICAL DATA

- Case: TO-277A (SMPC4.6U)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.104g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	8	A
$V_{RRM}$	200 - 1000	V
$I_{FSM}$	230	A
$T_{JMAX}$	150	°C
Package	TO-277A (SMPC4.6U)	
Configuration	Single die	



TO-277A (SMPC4.6U)



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	TUAS8D	TUAS8G	TUAS8J	TUAS8K	TUAS8M	UNIT
Marking code on the device		AS8D	AS8G	AS8J	AS8K	AS8M	
Repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	1000	V
Reverse voltage, total rms value	$V_{R(RMS)}$	140	280	420	560	700	V
Forward current	$I_F$	8					A
Surge peak forward current single half sine-wave superimposed on rated load	$t = 8.3\text{ms}$	230					A
	$t = 1.0\text{ms}$	580					A
Junction temperature	$T_J$	-55 to +150					°C
Storage temperature	$T_{STG}$	-55 to +150					°C

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	4	$^{\circ}\text{C/W}$
Junction-to-ambient thermal resistance	$R_{\theta JA}$	38	$^{\circ}\text{C/W}$
Junction-to-case thermal resistance	$R_{\theta JC}$	8	$^{\circ}\text{C/W}$

**Thermal Performance Note:** Units mounted on PCB (16mm x 16mm Cu pad test board)

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^{\circ}\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage <sup>(1)</sup>	TUAS8D TUAS8G TUAS8J	$I_F = 4\text{A}, T_J = 25^{\circ}\text{C}$	$V_F$	0.90	-	V
		$I_F = 8\text{A}, T_J = 25^{\circ}\text{C}$		0.96	1.10	V
		$I_F = 4\text{A}, T_J = 125^{\circ}\text{C}$		0.78	-	V
		$I_F = 8\text{A}, T_J = 125^{\circ}\text{C}$		0.87	1.01	V
	TUAS8K TUAS8M	$I_F = 4\text{A}, T_J = 25^{\circ}\text{C}$		0.90	-	V
		$I_F = 8\text{A}, T_J = 25^{\circ}\text{C}$		0.97	1.10	V
		$I_F = 4\text{A}, T_J = 125^{\circ}\text{C}$		0.78	-	V
		$I_F = 8\text{A}, T_J = 125^{\circ}\text{C}$		0.87	1.01	V
Reverse current @ rated $V_R$ <sup>(2)</sup>		$T_J = 25^{\circ}\text{C}$	$I_R$	-	5	$\mu\text{A}$
		$T_J = 125^{\circ}\text{C}$		-	60	$\mu\text{A}$
Junction capacitance	TUAS8D TUAS8G TUAS8J	1MHz, $V_R = 4.0\text{V}$	$C_J$	62	-	pF
	TUAS8K TUAS8M			54	-	pF

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> <sup>(1)</sup>	<b>PACKAGE</b>	<b>PACKING</b>
TUAS8x	TO-277A (SMPC4.6U)	6,000 / Tape & Reel


**Notes:**

1. "x" defines voltage from 200V(TUAS8D) to 1000V(TUAS8M)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

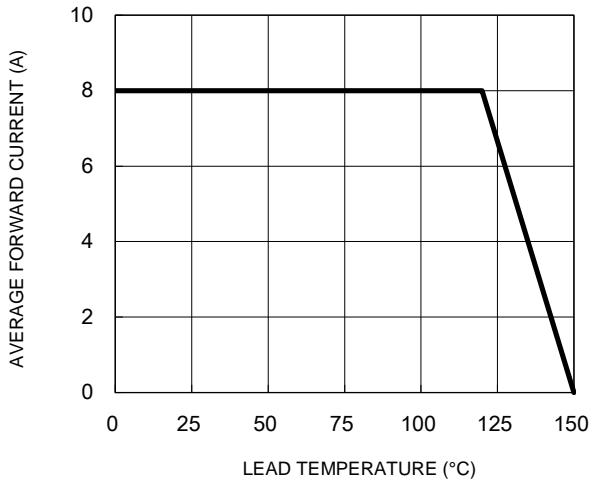


**Fig.2 Typical Junction Capacitance**

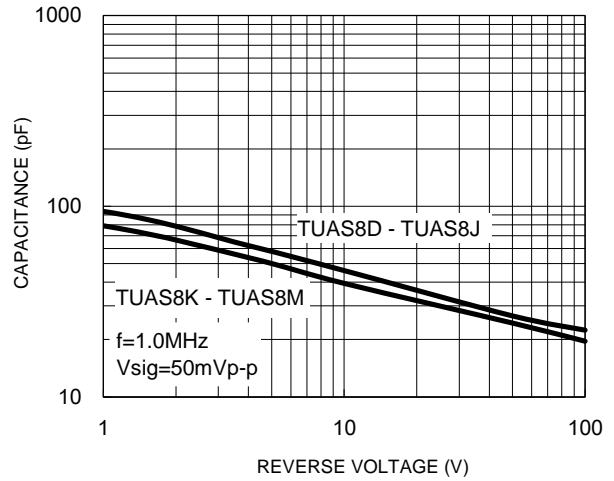


**Fig.3 Typical Reverse Characteristics**

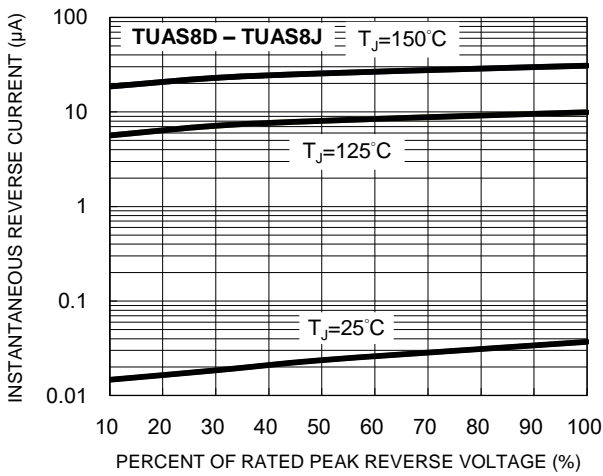


**Fig.4 Typical Forward Characteristics**

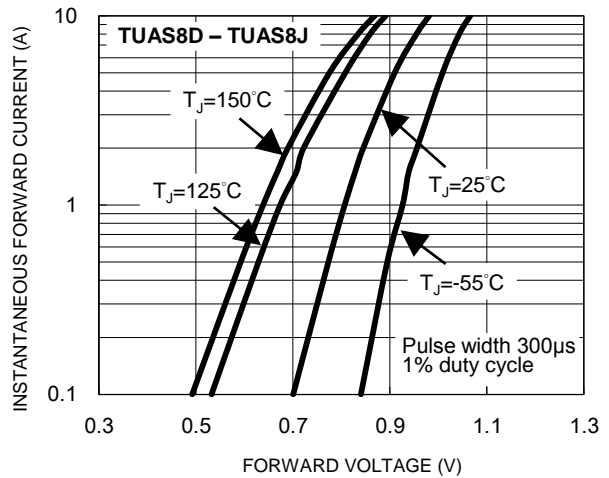

**Fig.5 Typical Reverse Characteristics**

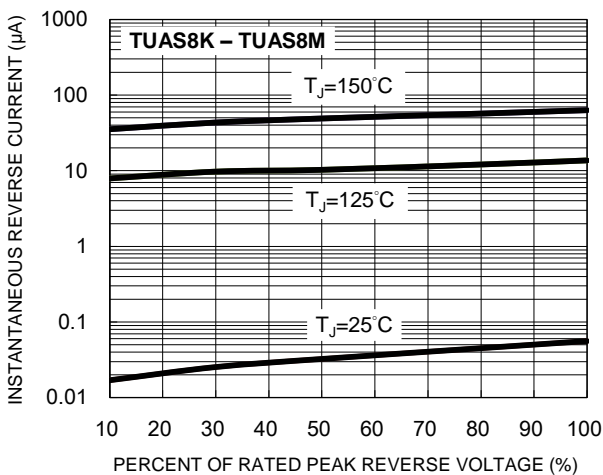


**Fig.6 Typical Forward Characteristics**

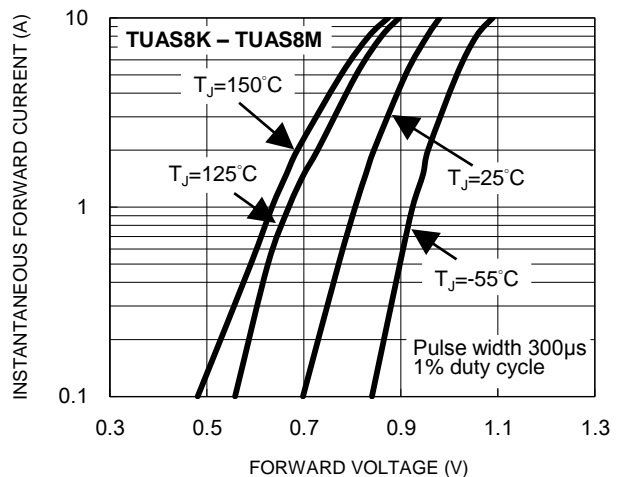

**CHARACTERISTICS CURVES**


( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.7 Typical Transient Thermal Impedance**

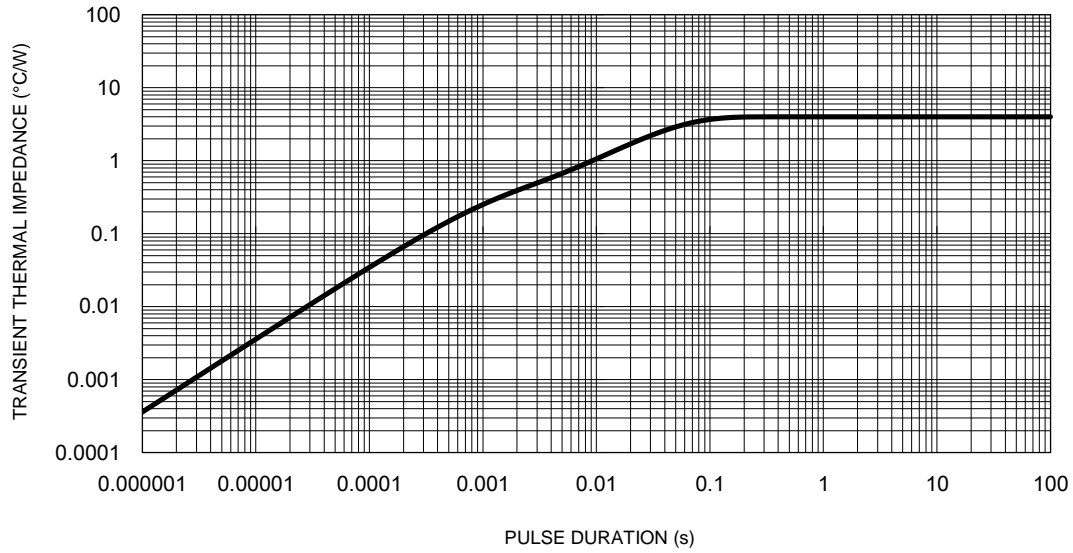

**PACKAGE OUTLINE DIMENSIONS**


TO-277A (SMPC4.6U)

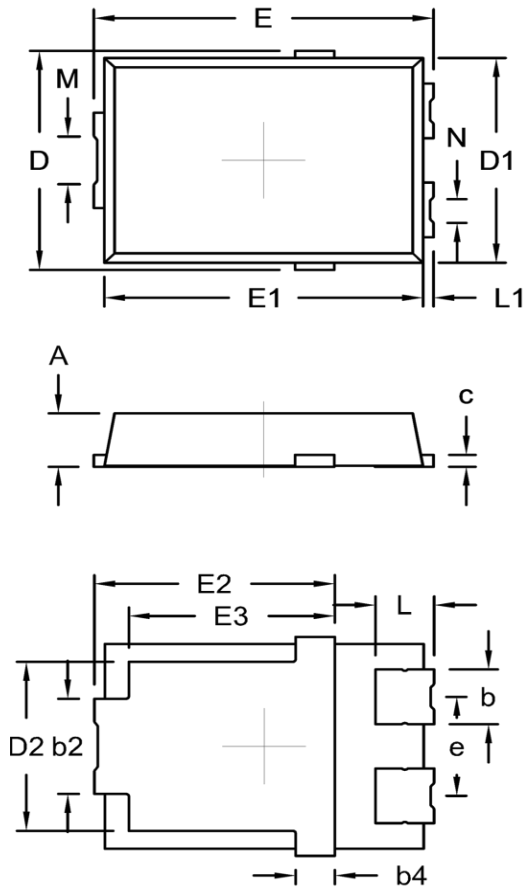

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.00	1.20	0.039	0.047
b	1.05	1.35	0.041	0.053
b2	1.90	2.20	0.075	0.087
b4	0.75 (NOM.)		0.030 (NOM.)	
c	0.15	0.40	0.006	0.016
D	4.45	4.75	0.175	0.187
D1	4.25	4.35	0.167	0.171
D2	3.40	3.70	0.134	0.146
E	6.35	6.65	0.250	0.262
E1	6.05	6.15	0.238	0.242
E2	4.40	4.80	0.173	0.189
E3	3.94 (NOM.)		0.155 (NOM.)	
e	2.08 (NOM.)		0.082 (NOM.)	
L	0.94	1.24	0.037	0.049
L1	0.05	0.35	0.002	0.014
M	0.65	1.15	0.026	0.045
N	0.25	0.75	0.010	0.030

Package body size D1 and E1 do not include mold flash  
Mold flash shall not exceed 0.1mm per side

**SUGGESTED PAD LAYOUT**

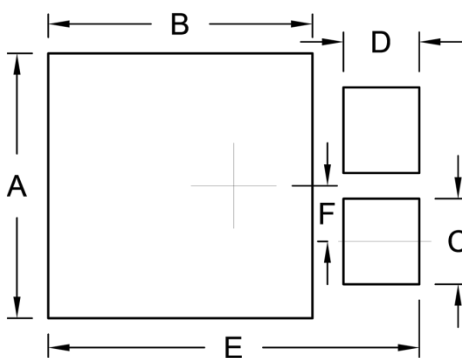

Symbol	Unit (mm)	Unit (inch)
A	4.95	0.195
B	4.95	0.195
C	1.60	0.063
D	1.42	0.056
E	6.95	0.274
F	1.04	0.041

**MARKING DIAGRAM**



P/N = Marking Code  
YW = Date Code  
F = Factory Code