
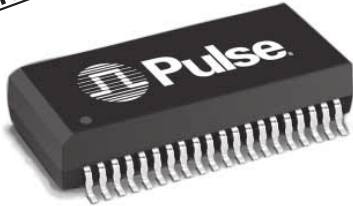


T1/E1/CEPT/ISDN-PRI TRANSFORMER

Quad Port SMT Transformer/Choke Modules, 1500 Vrms, Extended Temperature Range

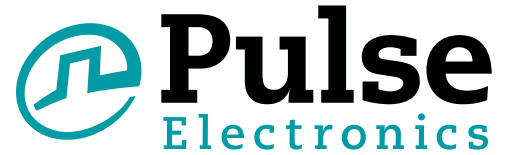

- Ⓡ RoHS peak reflow temperature rating: 245°C
- Ⓡ Optimized for enhanced EMC performance
- Ⓡ Quad-port SMT package contains Transformers with optional Common Mode Chokes on both transmit and receive channels
- Ⓡ Extended temperature range
- Ⓡ Isolation Voltage: 1500 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


RoHS Compliant Part Number		Turns Ratio (Pri:Sec ±2%)		Line Side OCL (mH MIN)	Cw/w (pF MAX)	Primary Pins	
w/CMC	wo/CMC	TX	RX			TX	RX
TX1263NL	TX1262NL	1:2	1:2	1.2	35	1-2, 6-7, 11-12, 16-17	3-4, 8-9, 13-14, 18-19
TX1267NL	TX1266NL	1:2	1:1	1.2	35	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20

- NOTES:**
- Other Transformer/Choke modules available. Please contact Pulse Applications Engineering. Please refer to data sheet T622 for a list of additional Octal Transformers without Common Mode Chokes.
 - RoHS compliant parts have an "NL" suffix at the end of the part number, TX1267NL.
 - To order Tape & Reel packaging add a "T" suffix to the part number (i.e. TX1263NL becomes TX1263NLT).


Mechanical

Schematic


TX1263NL / 1267NL

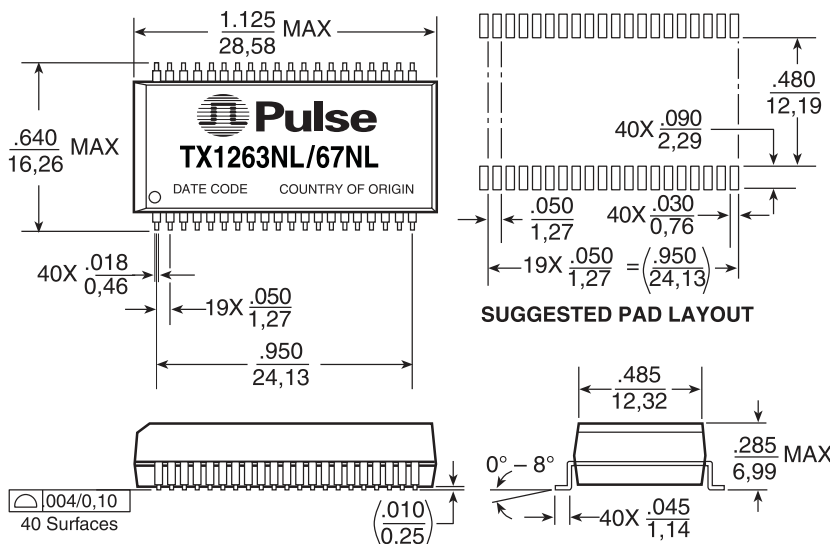

TX1263NL

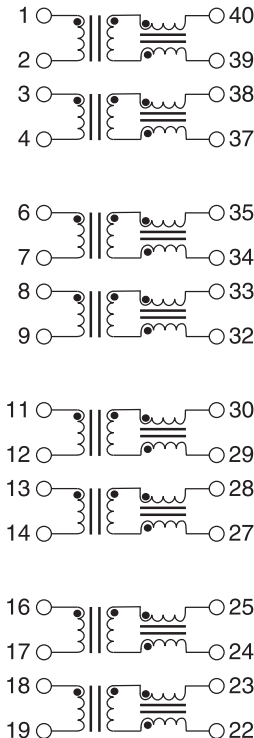


TX1267NL

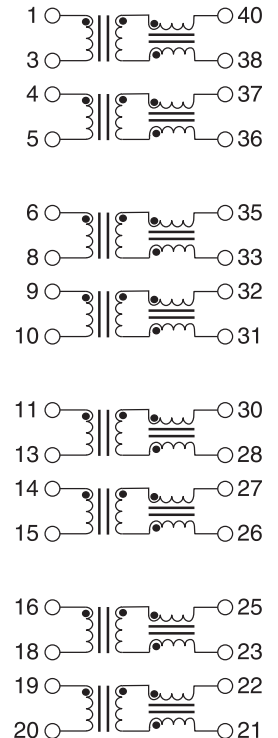

Weight.....5.0 grams Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Tape & Reel..... 250/reel Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$
 Tube..... 15/tube

T1/E1/CEPT/ISDN-PRI TRANSFORMER




Quad Port SMT Transformer/Choke Modules, 1500 Vrms, Extended Temperature Range

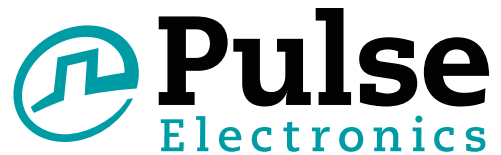

Mechanical

Schematics


TX1262NL, TX1266NL

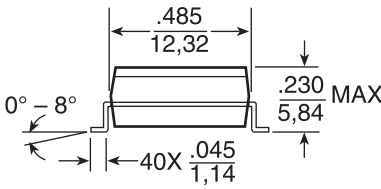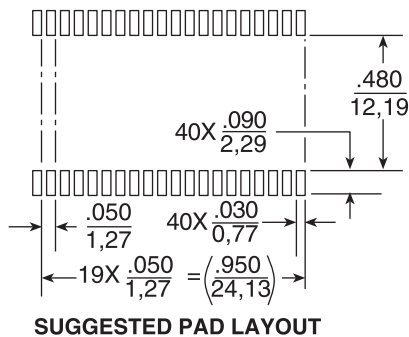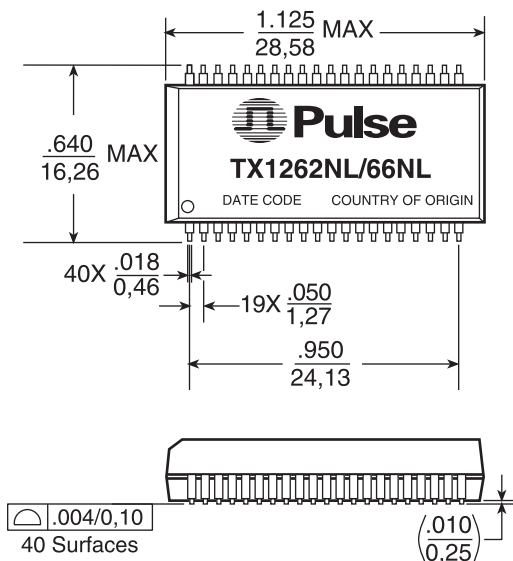


Weight.....4.0 grams
 Tape & Reel..... 250/reel
 Tube.....15/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

TX1262NL

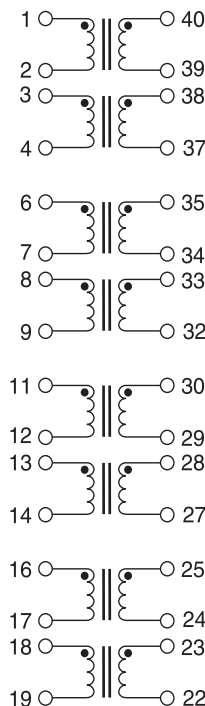

TX1266NL

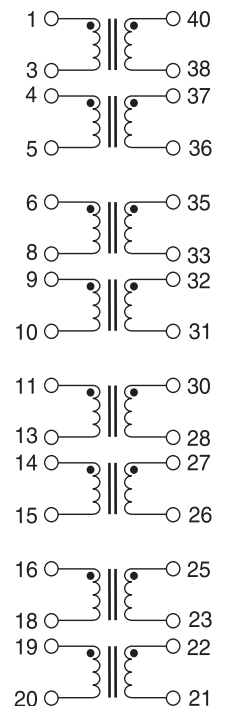

For More Information:

Pulse North American Headquarters
 12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.

Pulse European Headquarters
 Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Rd.
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057

Pulse North China
 Room 1503
 XinYin Building
 No. 888 YiShan Rd.
 Shanghai 200233
 China

Pulse South Asia
 150 Kampong Ampat
 #07-01/02
 KA Centre
 Singapore 368324

Pulse North Asia
 No. 26
 Kao Ching Rd.
 Yang Mei Chen
 Taoyuan Hsien
 Taiwan, R. O. C.
 32667

TEL: 858 674 8100
 FAX: 858 674 8262

TEL: 49 7032 7806 0
 FAX: 49 7032 7806 12

TEL: 86 755 33966678
 FAX: 86 755 33966700

TEL: 86 21 32181071
 FAX: 86 21 32181396

TEL: 65 6287 8998
 FAX: 65 6280 0080

TEL: 886 3 4643715
 FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. Pulse and the Squarewave logo are trademarks of Pulse Electronics Corporation, registered in the U.S. and other countries. © Copyright, 2011. Pulse Electronics Corporation. All rights reserved.