



DUAL CELLULAR / DUAL WI-FI
MOBILE ACCESS ROUTER



Manage this device with
Digi Remote Manager

DIGI TX54

Rugged and secure cellular router for mission critical industrial and transportation applications, including models for public safety networks

The versatility and performance of Digi TX54 routers make them ideal for mission critical applications requiring continuous connectivity, field longevity and edge computing. Digi TX54 provides secure routing and gateway functionality across wired and wireless communication networks. Local private subnets are bridged across public networks to safeguard privacy and integrity.

Digi TX54 is available with dual Wi-Fi radios to segment passenger Wi-Fi from fare collection, data, video and other applications, and offers models with both single and dual LTE-Advanced or LTE-Advanced Pro cellular modules.

Designed to meet the demands of first responders, Digi TX54 includes concurrent and independent dual cellular interfaces that prioritize critical communications. The industrial-grade design supports the most rugged conditions, including vibration and temperature changes. A Python development environment allows for edge computing and intelligence.

Four Gigabit Ethernet ports connect other IP-capable systems, each configurable as an isolated secure LAN, or all four can function as a Layer 2 switch. Digi TrustFence®, a suite of hardware and firmware features, ensures the integrity of Digi TX54 security functions. Chip-level encryption protects the onboard file system.


FEATURES AND BENEFITS

- Global models are available in both single and dual cellular options
- Future-built with dual-core 880 MHz MIPS processor and PCIe 2.0 internal bus
- Capable of segmenting private and public data communication across dual 600 Mbps LTE-Advanced Cat 11 or LTE-Advanced Pro Cat 12 cellular modules
- High-speed 867 Mbps 802.11ac Wi-Fi for WAN or LAN service and optional dual Wi-Fi radios
- Cryptographic co-processor with secure key generation
- Securely deploy, monitor and control devices with Digi Remote Manager®

RELATED PRODUCTS



APPLICATION EXAMPLE

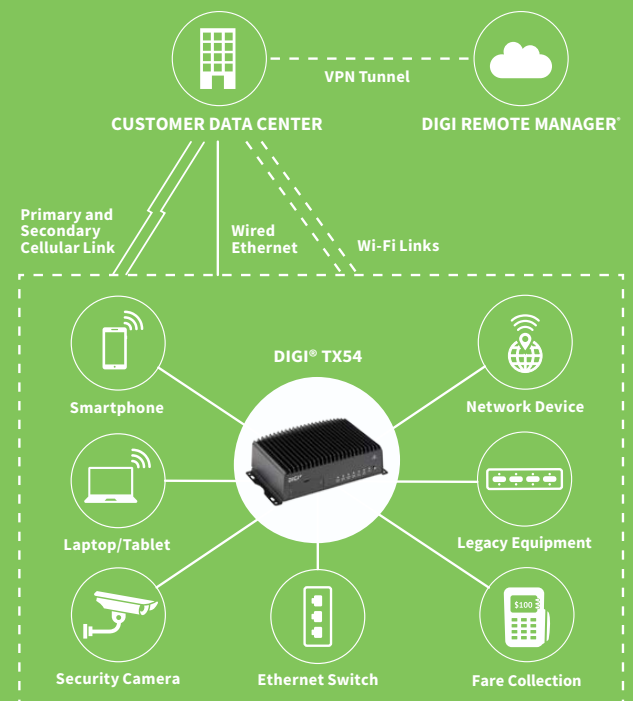

SPECIFICATIONS

DIGI TX54


CELLULAR	
LTE-ADVANCED WORLDWIDE	LTE FDD: B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B7 (2600), B8 (900), B12 (700ac), B13 (700c), B17 (700), B20 (800DD), B25 (1900), B26 (850), B28 (700 APAC), B29 (700), B30 (2300 Rx only), B66 (1700AWS); LTE TDD: B38 (2600), B40 (2300), B41 (2500); 3G HSPA+: B1 (2100), B2 (1900), B4 (1700AWS), B5 (850), B8 (900); Transfer rate (max): 600 Mbps down, 75 Mbps up (Cat 11)
LTE-ADVANCED PRO UNITED STATES / CANADA	LTE FDD: B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B7 (2600), B8 (900), B9 (1800), B12 (700ac), B13 (700c), B14 (700PS), B18 (850), B19 (800), B20 (800DD), B26 (US 850 Ext), B29 (US 700de Lower), B30 (2300), B32 (1500), B48 (3600), B66 (AWS-3); LTE TDD: B41 (2500), B42 (3500), B43 (3600), B46 (5200); 3G HSPA: B1 (2100), B2 (1900), B4 (1700AWS), B5 (850), B6 (800), B8 (900), B9 (1700), B19 (800); Transfer rate (max): 600 Mbps down, 150 Mbps up (Cat 12)
CONNECTOR	Single cellular models: (2) 50 Ω SMA (center pin: female) Dual cellular models: (4) 50 Ω SMA (center pin: female)
SIM SLOTS	Single cellular models: (2) Mini-SIM (2FF) Dual cellular models: (4) Mini-SIM (2FF)
SIM SECURITY	Screw-down SIM cover
WI-FI	
MODULE	2 x 2 MIMO 2.4/5 GHz 802.11 a/b/g/n/ac, 867 Mbps (max); dual Wi-Fi modules in TX54-A112
HOTSPOT	Captive portal, customizable splash page
AUTHENTICATION	Basic ToS acceptance, enterprise RADIUS
THIRD-PARTY SERVICES	Content filtering, embedded advertising
MODES	Up to 4 access points and 1 client per Wi-Fi module (8+2 total)
SECURITY	WPA/WPA2-personal, WPA/WPA2-enterprise
CONNECTORS	2 x 50 Ω RP-SMA (center pin: male)
GPS	
TECHNOLOGY	Multi-constellation: concurrent reception of up to 3 GNSS (GPS, Galileo, GLONASS, BeiDou)
SENSITIVITY	-163 dB
PROTOCOL	Protocol NMEA 0183 V2.3 sentence output
CONNECTOR	1 x 50 Ω SMA (center pin: female); +3.3 VDC active antenna drive
ETHERNET	
PORTS	(4) RJ-45; 10/100/1000 Mbps (auto-sensing)
SERIAL	
PORTS	(1) DB9-M; RS-232 DTE ; Signal support TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI software (XON/XOFF), hardware supported
USB	
PORTS	(1) USB 3.0 Type A connector
PHYSICAL	
DIMENSIONS (L X W X H)	14.61 cm x 20.95 cm x 6.35 cm (5.75 in x 8.25 in x 2.5 in)
WEIGHT	1.5 kg (3.3 lbs)
STATUS LEDS	Power on, WWAN signal strength, WWAN service
ENCLOSURE	Die-cast aluminium / IP54
POWER REQUIREMENTS	
POWER INPUT	9 - 36 VDC, 30 W minimum power source required
POWER CONSUMPTION	13 W typical (idle); 20 W typical (peak Tx/Rx)
ENVIRONMENTAL	
MOUNTING OPTIONS	Flexible mounting options
OPERATING TEMPERATURE	-34° C to 74° C (-29° F to 165° F)
STORAGE TEMPERATURE	-40° C to 85° C (-40° F to 185° F)
RELATIVE HUMIDITY	5% to 95% (non-condensing)
APPROVALS	
CELLULAR	PTCRB, AT&T, OnGo, Sprint, Verizon, Anatel; see part numbers for more details on certifications on each SKU
SAFETY	EN60950, EN62368
VEHICLE	ISO 7637-2/3, ISO 10605, ISO 16750-2 Pulses 4/5a/5b, SAE J1113, E-Mark
RAIL	EN50155, EN45545-2, EN50121-3-2
ENVIRONMENTAL	MIL-STD-810G (temperature, humidity, vibration, shock, dust)
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
WARRANTY	
PRODUCT WARRANTY	3-year

*Transfer rates are network operator dependent

ENTERPRISE SOFTWARE	DESCRIPTION
PROTOCOL SUPPORT	HTTP, HTTPS, FTP client, SSL, TLS v1.2, SCP (client and server), SFTP, SMTP client for use by scripts and the command line, SNMP (v2/v3), SSH; remote management via Digi Remote Manager®; Protocol analyzer, ability to capture PCAP for use with Wireshark; DynDNS; Dynamic DNS client compatible with BIND9/No-IP/DynDNS; Captive portal, Intelliflow; X.509 certificate management; Dead Reckoning
SECURITY	IP filtering, stateful firewall, custom firewall rules (iptables), address and port translation; SSL, SSLv2, SSLv3; Authentication: RADIUS, TACACS+; certificates; MAC address filtering; VLAN support
VPN	IPSec with IKEv1, IKEv2, NAT Traversal; OpenVPN client and server; GRE VPN tunnels; Cryptology: SHA-1/256/384/512, MD5, RSA; Encryption: 3DES and AES up to 256-bit (CBC mode for IPsec); Diffie Hellman: DH groups 1-32 (CURVE448)
ROUTING/FAILOVER	IP pass-through; NAT, NAPT with IP port forwarding; Ethernet bridging; GRE; Multicast routing; Routing protocols: RIP (v1, v2) OSPF, BGP; IP failover: VRRP; automatic failover, Digi SureLink®
OTHER PROTOCOLS	DHCP; Dynamic DNS client compatible with No-IP/DynDNS; Nagios, DNS server, NTP server, Multicast, mDNS, IPerf
LOCAL MANAGEMENT	Web interface (HTTP/HTTPS); CLI (SSH, serial port)
MANAGEMENT / TROUBLESHOOTING PROTOCOLS	Protocol analyzer with PCAP for Wireshark, event and system logging (with Syslog), accessible from Digi Remote Manager, SFTP or SCP
PROGRAMMING TOOLS / ENVIRONMENTS	Python v3.6.4

PRODUCT IMAGES

FRONT

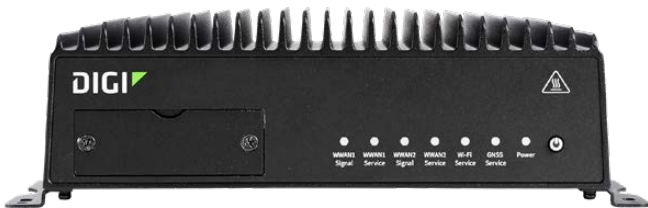

BACK



POWER SUPPLY*



ACCESSORY KIT*

