


DASH NO	MODEL NO	Ω
-1	BJ228	50
-2	UBJ228	75

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.




REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
C	REVISED PER ECO 14093	6-6-01	MM.

RED INDICATES ORIGINAL



SCALE 1/1

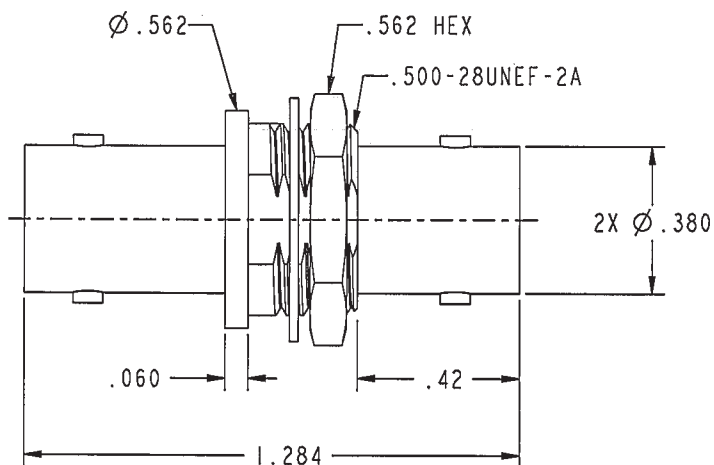


RECOMMENDED PANEL CUTOUT
SCALE 1/1

3. SOCKET CONTACT COAXIAL BNC TYPE INSULATED FEED THRU BULKHEAD JACK, 50 AND 75 OHM VERSIONS

2. MAX PANEL THICKNESS: .156

1. FINISH: TFS-1Y (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1°		 <p>TROMPETER RF connectivity <small>a cinch connectivity solutions brand</small></p>	
DRN	JCM	6-5-01	MATERIAL:		
CHK	MM.	6/5/01	FINISH:	SIZE	CAGE CODE
APPROVED	MM.	6/5/01	DO NOT SCALE DWG	A	14949
PROVE FILE NO.	105-2057	DATE	6/13/00	DRAWING NO.	105-2057
NEXT ASSY		SCALE	2/1	REV.	C
		DATE	6/13/00	SHEET	1C