


GSD

UG-536C/U

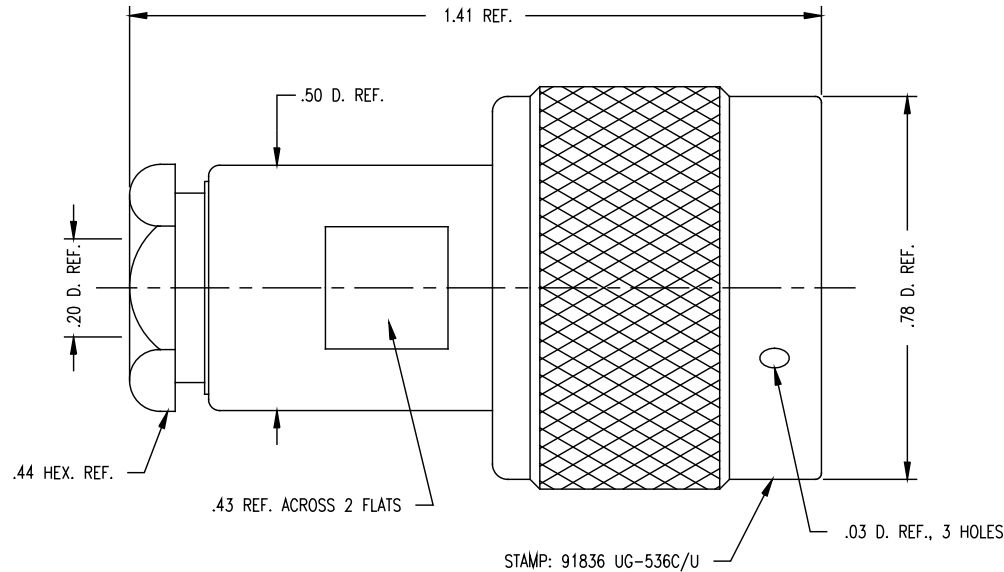

NOTES:

1. FOR USE WITH RG-55/U & RG-58/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1014.
3. INTERFACE PER MIL-STD-348, FIG. 304-1.
4. MATERIALS:
 INSULATOR: TEFLON, ASTM-D-1457
 GASKETS: SILICONE RUBBER, ZZ-R-765
 C-RING & OUTER CONTACT: PHOSPHOR BRONZE, QQ-B-750
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
 CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHz.

STAMP: 91836 UG-536C/U

REVISIONS

ISSUE	CHANGES
5	CN 32748 C WJM 01/15/91

WJM1684

SCALE 4:1

APPROX SURFACE AREA

KN-58-07

USED ON

REF: RE-B-49090 B

PLUG, N

DRAWN WJM DATE 01/15/92

DESIGN WJB DATE 01/17/92

APPR. DATE

KINGS
 ELECTRONICS CO., INC.
 TUCKAHOE, NEW YORK 10707

UG-536C/U

GSD