

**GLASS PASSIVATED SUPER FAST RECTIFIER**


**VOLTAGE RANGE 50 to 200 Volts CURRENT 1.0 Ampere**

**FEATURES**

- \* High reliability
- \* Low leakage
- \* Low forward voltage
- \* High current capability
- \* Super fast switching speed
- \* High surge capability
- \* Good for switching mode circuit

**MECHANICAL DATA**

- \* Case: Molded plastic
- \* Epoxy: Device has UL flammability classification 94V-0
- \* Lead: MIL-STD-202E method 208C guaranteed
- \* Mounting position: Any
- \* Weight: 0.33 gram

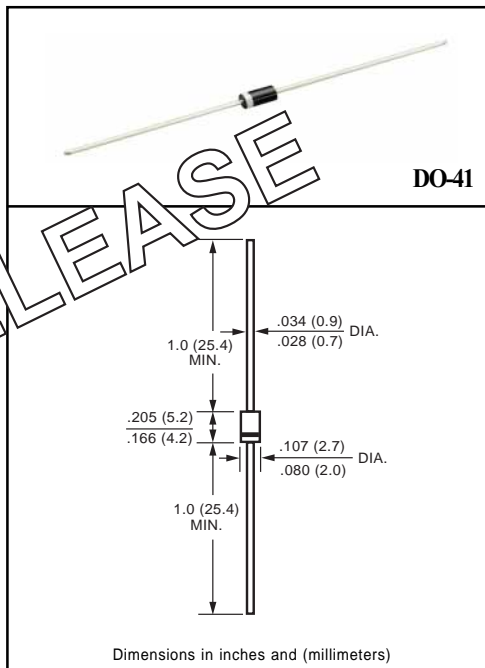

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

**MAXIMUM RATINGS** (At TA = 25°C unless otherwise noted)

| RATINGS   | SYMBOL   | USF11        | USF12 | USF13 | USF14 | UNITS |
|---|----------|--------------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage  | VRRM     | 50           | 100   | 150   | 200   | Volts |
| Maximum RMS Volts   | VRMS     | 35           | 70    | 105   | 140   | Volts |
| Maximum DC Blocking Voltage   | Vdc      | 50           | 100   | 150   | 200   | Volts |
| Maximum Average Forward Current at TA = 55°C  | Io       | 1.0          |       |       |       | Amps  |
| Peak Forward Surge Current IFM (surge):8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | IFSM     | 30           |       |       |       | Amps  |
| Typical Junction Capacitance (Note 2)   | CJ       | 7            |       |       |       | pF    |
| Operating and Storage Temperature Range   | TJ, TSTG | -55 to + 150 |       |       |       | °C    |


**ELECTRICAL CHARACTERISTICS** (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS   | SYMBOL       | USF11 | USF12 | USF13 | USF14 | UNITS |
|---|--------------|-------|-------|-------|-------|-------|
| Maximum Forward Voltage at 1.0A DC                      | VF           | 0.92  |       |       |       | Volts |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | @ TA = 25°C  | 5.0   |       |       |       | uAmps |
|   | @ TA = 100°C | 100   |       |       |       |       |
| Maximum Reverse Recovery Time (Note 1)                  | trr          | 20    |       |       |       | nSec  |

NOTES : 1. Test Conditions: IF=0.5A, IR=-1.0A, IRR=-0.25A.  
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

# RATING AND CHARACTERISTIC CURVES ( USF11 THRU USF14 )

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

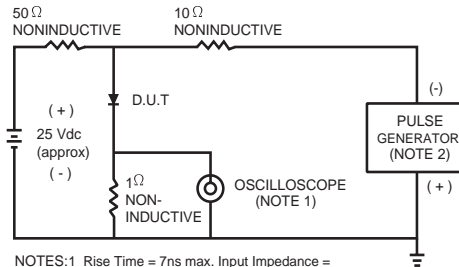

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm, 22pF.  
 2. Rise Time = 10ns max. Source Impedance = 50 ohms.




FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

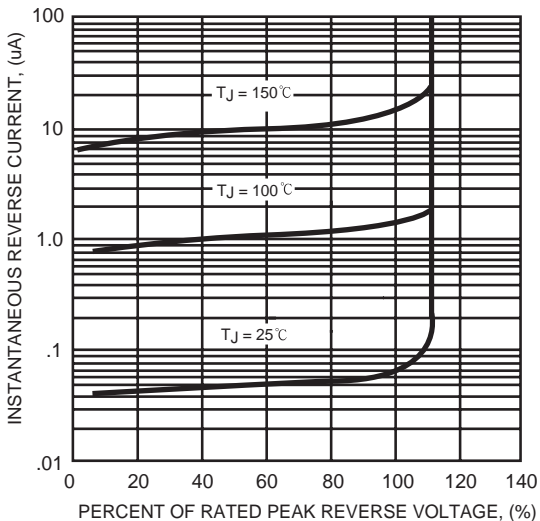


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

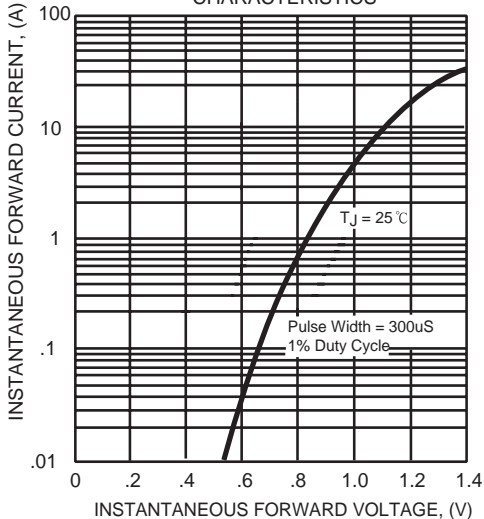


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

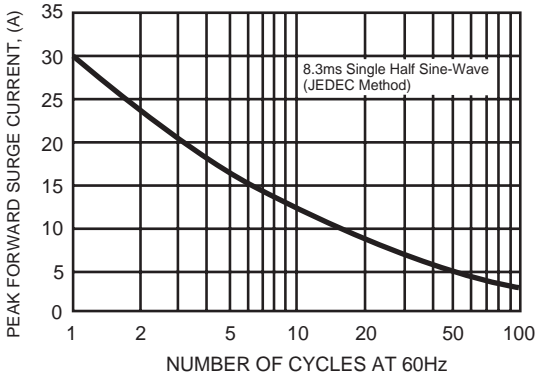


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

