RoHS COMPLIANT

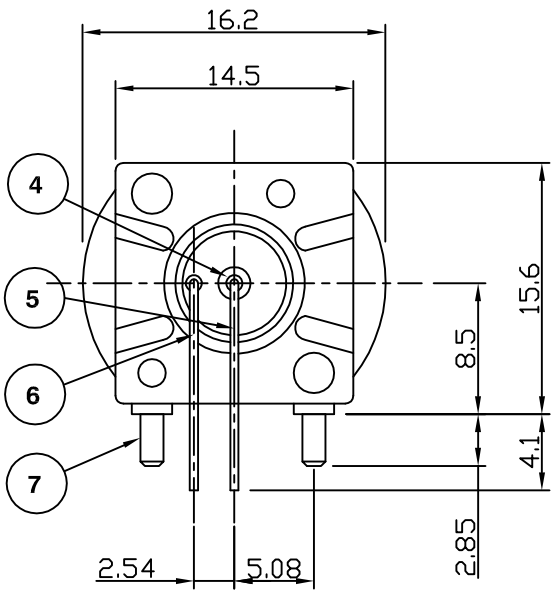

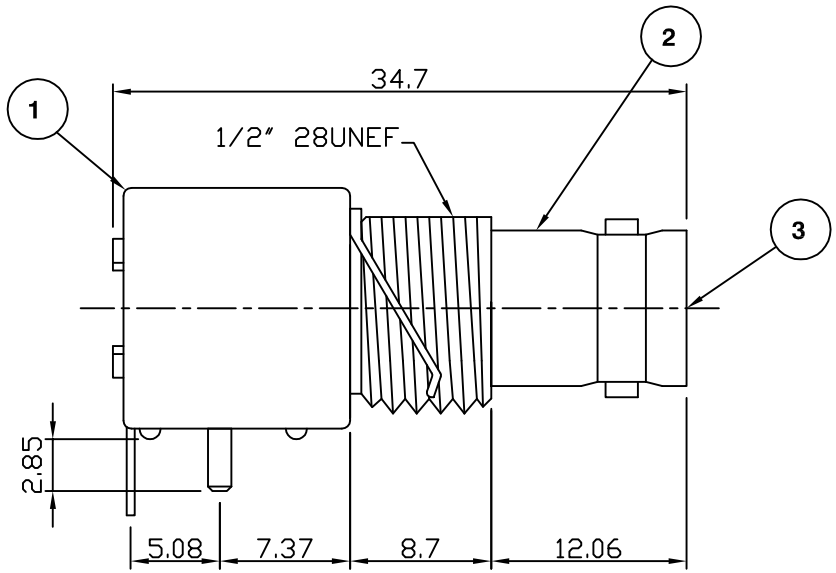

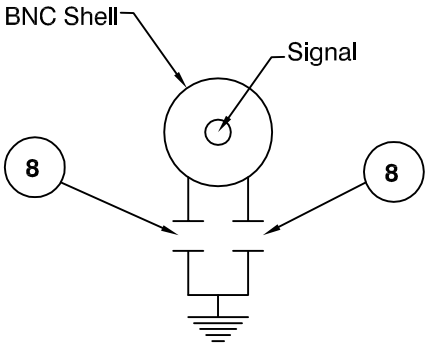

Capacitor Circuit Diagram

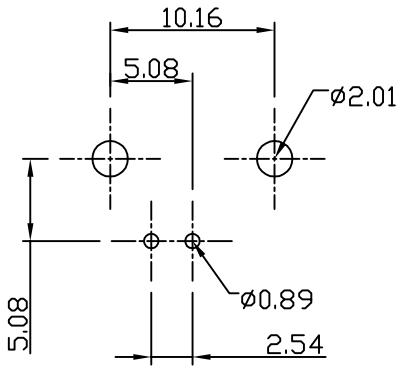

Recommended PCB Layout

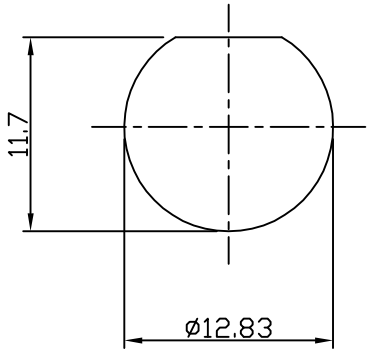

Panel Cutout

Electrical Characteristics

Nominal Impedance:	50 ohms
Frequency Range:	DC to 1 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	3.0 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-65 °C to +165 °C

	PART	DESCRIPTION
1	Body	PBT + 30% Glass Fibre (UL 94V-0)
2	Body	Zinc Alloy, nickel plated
3	Dielectric	Polypropylene UL 94HB
4	Contact	Phosphor bronze, gold plated (interface)
5	Signal Contact	Phosphor bronze, tin plated
6	Ground Contact	Copper, tin plated
7	Mounting Post	Brass, tin plated
8	Ceramic Chip Capacitor	4700 pF±10%

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Corrected note Item 5, was tin lead	MS	2	5 Sep 13
First Issue	SN	1	04 Feb 02

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
11 Bilton Road,
Chelmsford,
Essex, CM1 2UP
UK
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	
DIMENSIONS: mm	
TOLERANCES: ± 0.2mm unless otherwise stated	
DRAWN BY:	S Nash
CHECKED BY:	S Nash
APPROVED BY:	M Nielsen
DATE:	04 Feb 02

TITLE:

BNC Right Angle PCB Mount Jack Filter Connector

PART NUMBER:

VBF201

PAGE: 1 of 1

COPYRIGHT © 2002 VITELEC ELECTRONICS LIMITED

THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION