

# VFJA1491C

## Jitter Attenuator / Clock Generator

### Features



- Frequency Range 10MHz to 200 MHz
- 14mm x 9mm Surface Mount Package
- Dual LVCMOS Outputs
- Low Jitter/Phase Noise
- Tape and Reel Packaging

### Applications

- Telecom Switching
- Wireless Communication
- Timing over Packet

### Description

The VFJA1491P is a Jitter Attenuator which accepts an input reference clock up to 200 MHz and provides an output frequency up to 200 MHz. The output frequency is determined by a VCXO designed for low phase noise. The VFJA1491P is available in a 14 mm x 9 mm surface mount package.

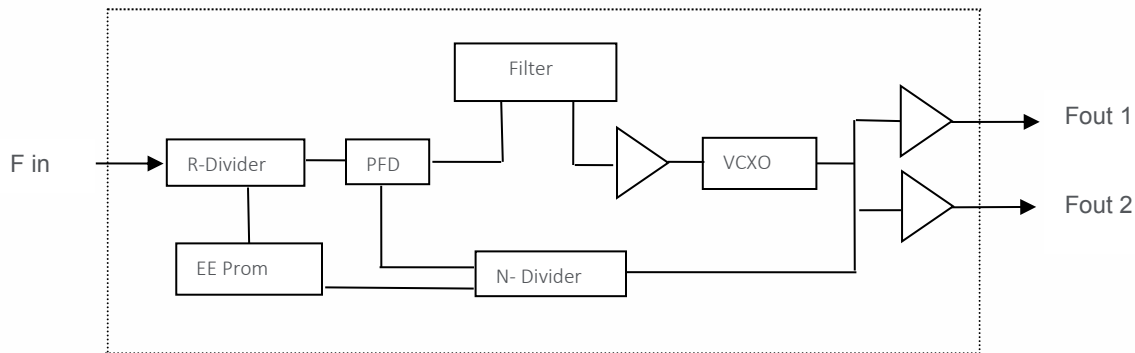

Block Diagram



### Electrical Specifications

Parameter	Symbol	Conditions & Remarks	Min	Typical	Max	Unit	
Input Frequency	$F_{in}$	Slew Rate 1.0V/ns	10	-	200	MHz	
Input Level		DC coupled internally	0.4		3.3	Vp-p	
Output Frequency	$F_{out}$		10		200	MHz	
Output Voltage Levels	$V_{OH}$	$R_L = 10K \Omega // 10pF$	$.9 V_{CC}$		$V_{CC}$	V	
	$V_{OL}$		0		$.1V_{CC}$	V	
Duty Cycle		@ 50% $V_{out}$ (p-p)	45		55	%	
Rise / Fall Times	$T_r/T_f$	20% to 80%			0.5	ns	
Lock Range	APR		$\pm 20$			ppm	
Modulation BW	MBW		10			Hz	
Operating Temperature Range	$T_a$		-40		+85	$^{\circ}C$	
Jitter $F_o < 50MHz$		12kHz to 20 MHz		190	220	fs	
Jitter $F_o > 100 MHz$				85	100		
SSB Output Phase Noise @ 25 MHz	$\Phi_n$	100 Hz offset		-117		dBc/Hz	
		1K Hz offset		-132			
		10K Hz offset		-153			
		100K Hz offset		-160			
		1M Hz offset		-161			
Start up Time				2	3	s	
Supply Voltage			+3.15	3.30	+3.45	V	
Input Current				85	100	mA	
Enable / Disable		Logic "0" (< 0.5V or floating) Output Enabled Logic "1" (> 2.2V) Output Disabled					LVC MOS
Enable/Disable Time					100	ns	


### Absolute Maximum Ratings

Parameter	Conditions & Remarks	Min	Typical	Max	Unit
Supply Breakdown Voltage	$V_{CC}$	-0.5		+4.0	V
Storage Temperature	$T_s$	-50		+95	$^{\circ}C$

## Mechanical and Environmental

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	Per MIL-STD-883, Method 2007, Condition A
Soldering Conditions	260°C for 10s max
Hermetic Seal	Leak rate less than $5 \times 10^{-8}$ atm.cc/s of helium (crystal only)

## Phase Noise Performance @ Fout = 25.00 MHz

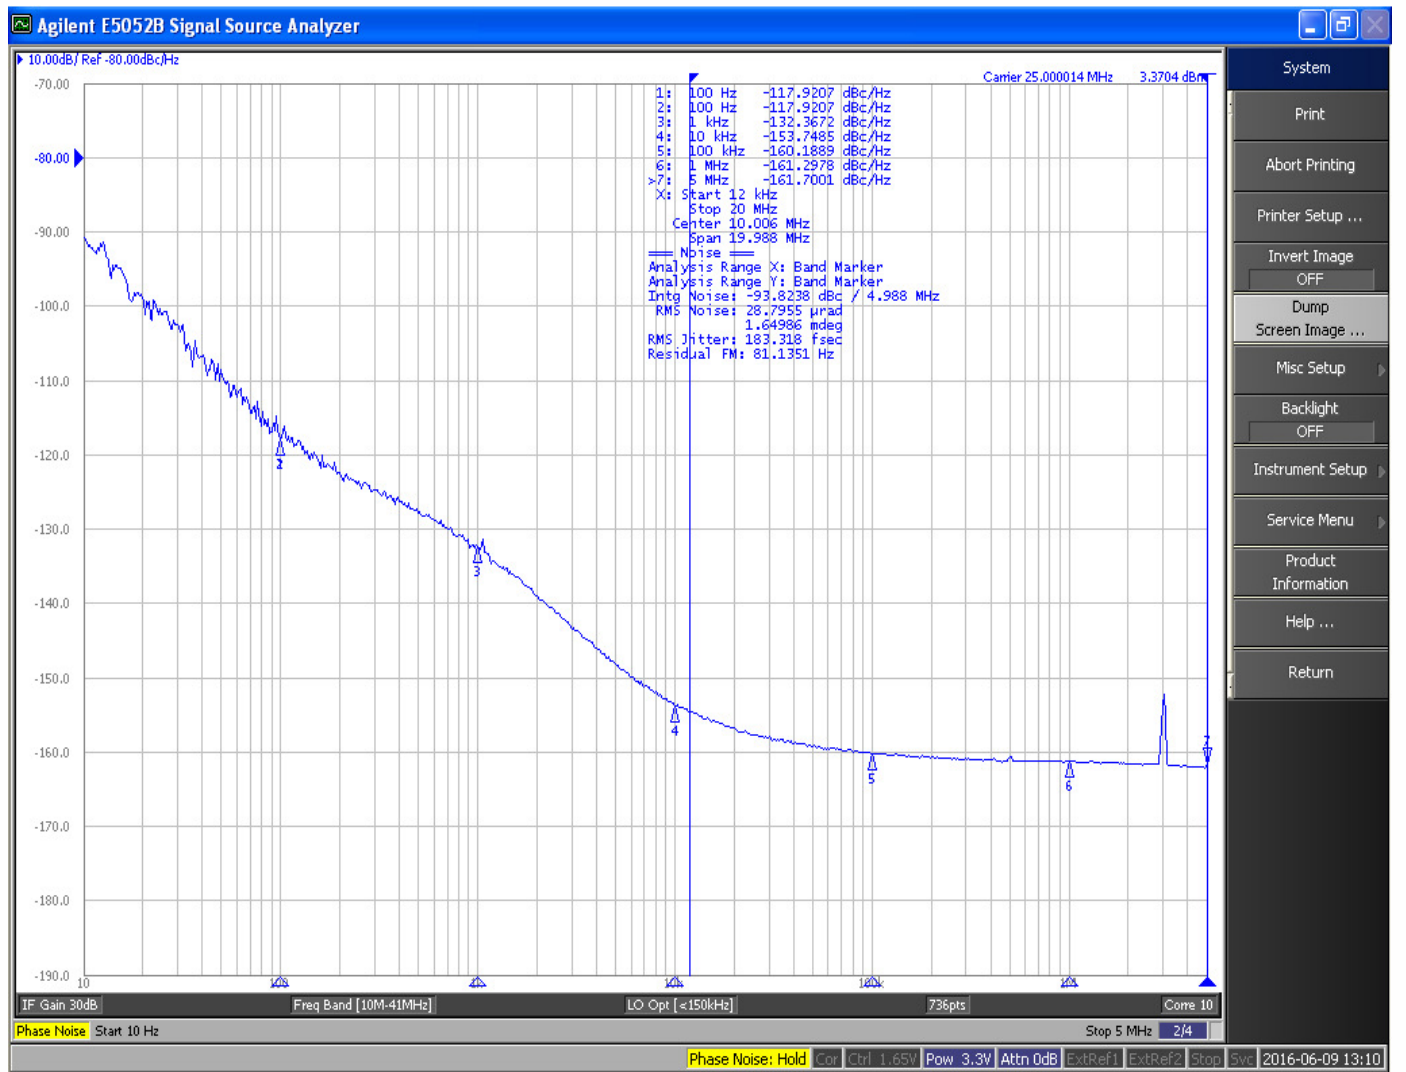

Notes:



## Standard Frequencies

Part Number	Output Frequency	Input Frequency	Loop BW
VFJA1491C-125.000M-25.000M	125.00 MHz	25.00 MHz	15 Hz
VFJA1491C-100.000M-10.000M	100.00 MHz	10.00 MHz	15 Hz
VFJA1491C-25.000M-25.000M	25.00 Mhz	25.00 MHz	35 Hz

Consult factory for more frequency and bandwidth options.

## How to Order

Model Number	Output Frequency	Input Frequency
VFJA1491P	XXX.XXX M	XXX.XXX M

## Marking

VFJA1491C xxx.xxx MHz (Fout) xxx.xxx MHz (Fin) ●      XXYY (Date)
--