



Power MOSFET Stage for Boost Converters

Module for Power Factor Correction

$I_{D25} = 35 \text{ A}$
 $V_{DSS} = 500 \text{ V}$
 $R_{DS(on)} = 0.12 \Omega$

$V_{RRM(Diode)}$	V_{DSS}	Type
V	V	
600	500	VUM 24-05N

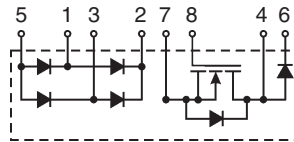

Symbol	Conditions	Maximum Ratings		
V_{DSS}	$T_{VJ} = 25^\circ\text{C to } 150^\circ\text{C}$	500	V	
V_{DGR}	$T_{VJ} = 25^\circ\text{C to } 150^\circ\text{C}; R_{GS} = 10 \text{ k}\Omega$	500	V	
V_{GS}	Continuous	± 20	V	
I_D	MOSFET $T_S = 85^\circ\text{C}$	24	A	
I_D		$T_S = 25^\circ\text{C}$	35	
I_{DM}		$T_S = 25^\circ\text{C}, t_p = \textcircled{1}$	95	
P_D	$T_S = 85^\circ\text{C}$	170	W	
I_S	$V_{GS} = 0 \text{ V}, T_S = 25^\circ\text{C}$	24	A	
I_{SM}	$V_{GS} = 0 \text{ V}, T_S = 25^\circ\text{C}, t_p = \textcircled{1}$	95	A	
V_{RRM}	Boost Diode $T_S = 85^\circ\text{C}, \text{rectangular } \delta = 0.5$	600	V	
I_{dAV}		40	A	
I_{FSM}		$T_{VJ} = 45^\circ\text{C}, t = 10 \text{ ms (50 Hz)}$	300	A
	$t = 8.3 \text{ ms (60 Hz)}$	320	A	
I_{FSM}	$T_{VJ} = 150^\circ\text{C}, t = 10 \text{ ms (50 Hz)}$	260	A	
	$t = 8.3 \text{ ms (60 Hz)}$	280	A	
P	$T_S = 85^\circ\text{C}$	36	W	
V_{RRM}	Rectifier Diodes $T_S = 85^\circ\text{C}, \text{sinus } 180^\circ$	800	V	
I_{dAV}		40	A	
I_{FSM}		$T_{VJ} = 45^\circ\text{C}, t = 10 \text{ ms (50 Hz)}$	300	A
	$t = 8.3 \text{ ms (60 Hz)}$	320	A	
I_{FSM}	$T_{VJ} = 150^\circ\text{C}, t = 10 \text{ ms (50 Hz)}$	260	A	
	$t = 8.3 \text{ ms (60 Hz)}$	280	A	
P	$T_S = 85^\circ\text{C}$	33	W	
T_{VJ}	Module	-40...+150	$^\circ\text{C}$	
T_{JM}		150	$^\circ\text{C}$	
T_{stg}		-40...+150	$^\circ\text{C}$	
V_{ISOL}	50/60 Hz	$t = 1 \text{ min}$	3000	V~
	$I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ s}$	3600	V~
M_d	Mounting torque (M5)	2-2.5/18-22	Nm/lb.in.	
Weight		28	g	

Features

- Package with DCB ceramic base plate
- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Low $R_{DS(on)}$ HDMOS™ process
- Low package inductance for high speed switching
- Ultrafast boost diode
- Kelvin source for easy drive

Applications

- Power factor pre-conditioner for SMPS, UPS, battery chargers and inverters
- Boost topology for SMPS including 1~ rectifier bridge
- Power supply for welding equipment

Advantages

- 3 functions in one package
- Output power up to 5 kW
- No external isolation
- Easy to mount with two screws
- Suitable for wave soldering
- High temperature and power cycling capability
- Fits easily to all available PFC controller ICs

$\textcircled{1}$ Pulse width limited by T_{VJ}

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_{DSS}	$V_{GS} = 0\text{ V}, I_D = 2\text{ mA}$	500		V
$V_{GS(th)}$	$V_{DS} = 20\text{ V}, I_D = 20\text{ mA}$	2		V
I_{GSS}	$V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}$			± 500 nA
I_{DSS}	$V_{DS} = 500\text{ V}, V_{GS} = 0\text{ V}$			2 mA
$R_{DS(on)}$	$T_{VJ} = 25^{\circ}\text{C}$			0.12 Ω
R_{Gint}	$T_{VJ} = 25^{\circ}\text{C}$			1.5 Ω
g_{fs}	$V_{DS} = 15\text{ V}, I_{DS} = 12\text{ A}$		30	S
V_{DS}	$I_{DS} = 24\text{ A}, V_{GS} = 0\text{ V}$			1.5 V
$t_{d(on)}$	$V_{DS} = 250\text{ V}, I_{DS} = 12\text{ A}, V_{GS} = 10\text{ V}$ $Z_{gen.} = 1\ \Omega, L\text{-load}$			100 ns
$t_{d(off)}$				220 ns
C_{iss}	$V_{DS} = 25\text{ V}, f = 1\text{ MHz}, V_{GS} = 0\text{ V}$			8.5 nF
C_{oss}				0.9 nF
C_{rss}				0.3 nF
Q_g	$V_{DS} = 250\text{ V}, I_D = 12\text{ A}, V_{GS} = 10\text{ V}$		350	nC
R_{thJH}	with heat transfer paste			0.38 K/W
V_F	$I_F = 22\text{ A}; T_{VJ} = 25^{\circ}\text{C}$			1.65 V
	$T_{VJ} = 150^{\circ}\text{C}$			1.4 V
I_R	$V_R = 600\text{ V}, T_{VJ} = 25^{\circ}\text{C}$			1.5 mA
	$V_R = 480\text{ V}, T_{VJ} = 25^{\circ}\text{C}$			0.25 mA
	$T_{VJ} = 125^{\circ}\text{C}$			7 mA
V_{T0}	For power-loss calculations only			1.14 V
r_T	$T_{VJ} = 125^{\circ}\text{C}$			10 m Ω
I_{RM}	$I_F = 30\text{ A}; -di_F/dt = 240\text{ A}/\mu\text{s}$			
	$V_R = 350\text{ V}, T_{VJ} = 100^{\circ}\text{C}$	10	11	A
R_{thJH}	with heat transfer paste			1.8 K/W
V_F	$I_F = 20\text{ A}, T_{VJ} = 25^{\circ}\text{C}$			1.4 V
	$T_{VJ} = 125^{\circ}\text{C}$			1.4 V
I_R	$V_R = 800\text{ V}, T_{VJ} = 25^{\circ}\text{C}$			0.25 mA
	$V_R = 640\text{ V}, T_{VJ} = 125^{\circ}\text{C}$			2 mA
V_{T0}	For power-loss calculations only			1.05 V
r_T	$T_{VJ} = 125^{\circ}\text{C}$			16 m Ω
R_{thJH}	with heat transfer paste			2 K/W

Dimensions in mm (1 mm = 0.0394")

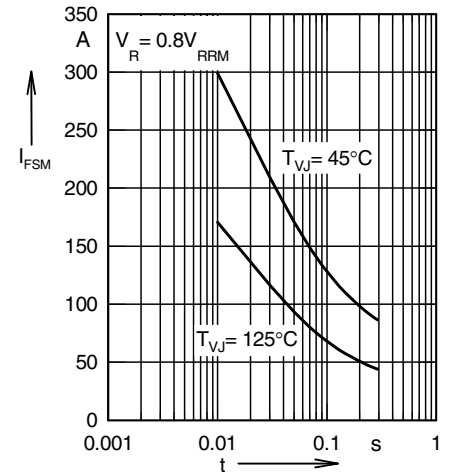
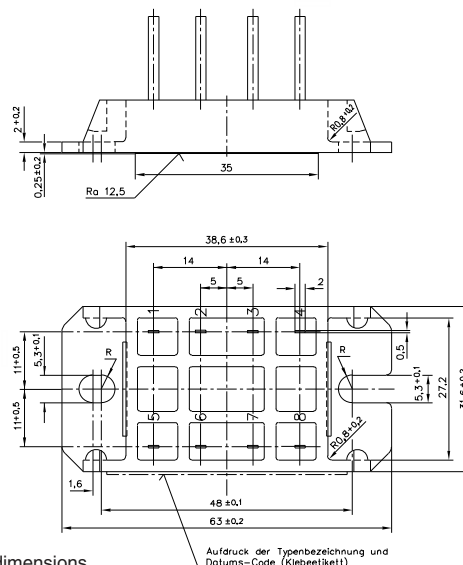


Fig. 1 Non-repetitive peak surge current (Rectifier Diodes)

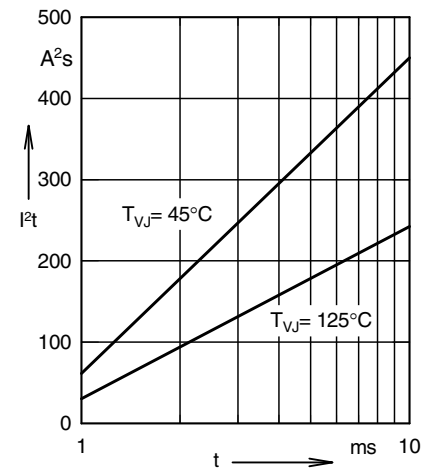


Fig. 2 I^2t for fusing (Rectifier Diodes)

IXYS reserves the right to change limits, test conditions and dimensions

Freimaßstab: DIN ISO 2768 c

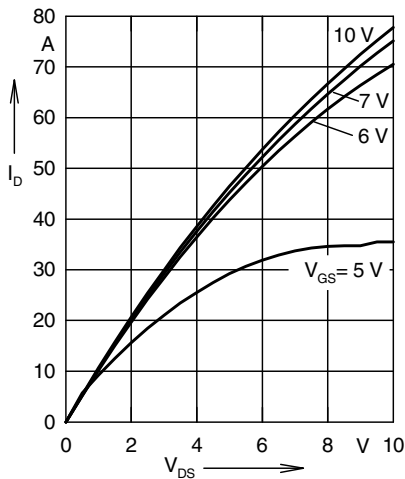


Fig. 3 Typ. output characteristic $I_D = f(V_{DS})$ (MOSFET)

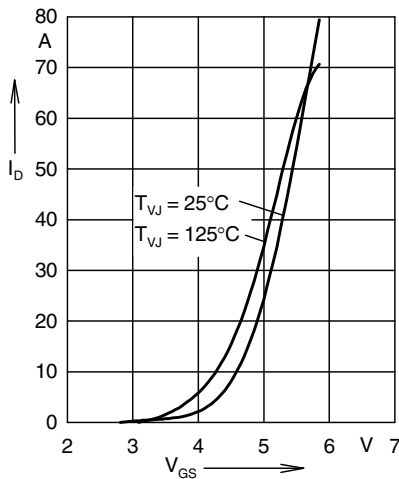


Fig. 4 Typ. transfer characteristics $I_D = f(V_{GS})$ (MOSFET)

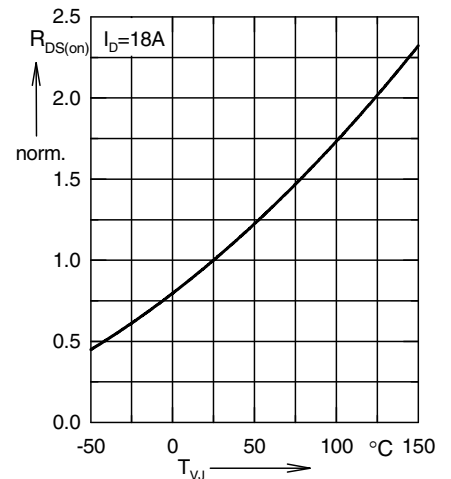


Fig. 5 Typ. normalized $R_{DS(on)} = f(T_{VJ})$ (MOSFET)

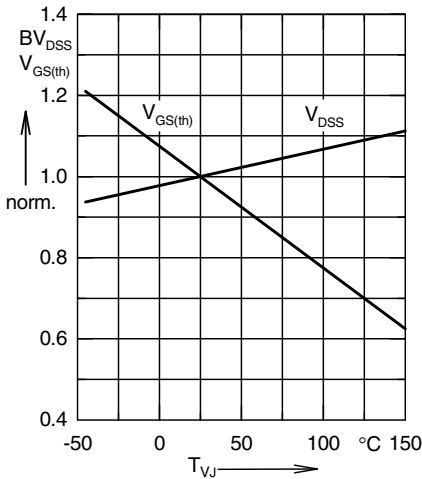


Fig. 6 Typ. normalized $BV_{DS(sat)} = f(T_{VJ})$
 $V_{GS(th)} = f(T_{VJ})$ (MOSFET)

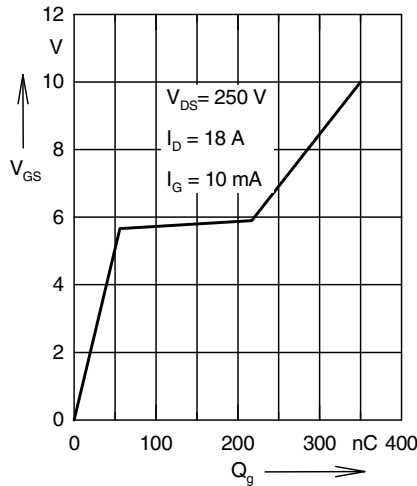


Fig. 7 Typ. turn-on gate charge characteristics, $V_{GS} = f(Q_g)$ (MOSFET)

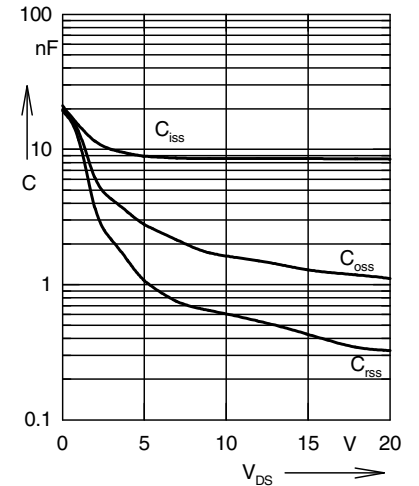


Fig. 8 Typ. capacitances $C = f(V_{DS})$, $f = 1 \text{ MHz}$ (MOSFET)

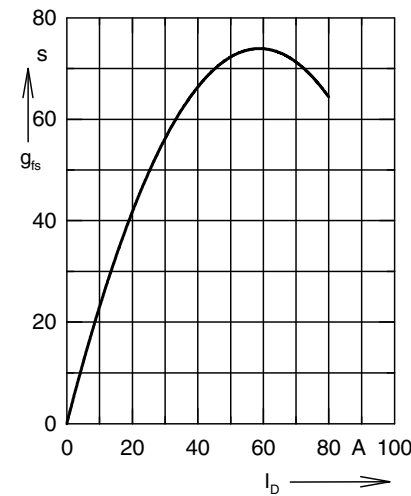


Fig. 9 Typ. transconductance, $g_{fs} = f(I_D)$ (MOSFET)

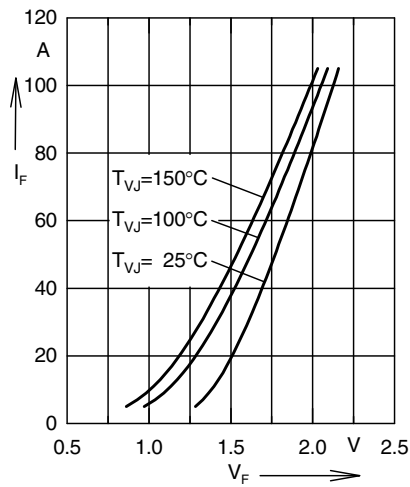


Fig. 10 Forward current versus voltage drop (Boost Diode)

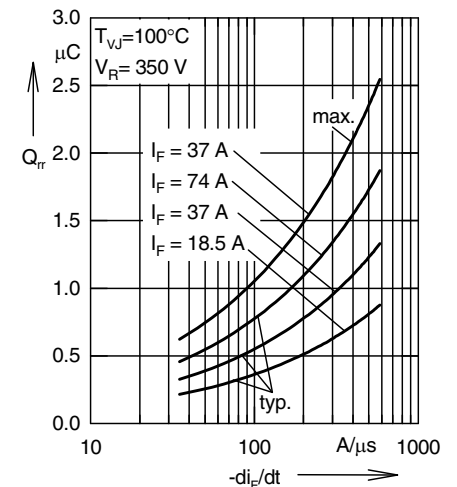


Fig. 11 Recovery charge versus $-di_F/dt$ (Boost Diode)