


#### **TECHNICAL DATA SHEET**

**Description: Ceramic Single Feed GNSS/BT** 

Antenna

PART NUMBER: W3056

### Features:

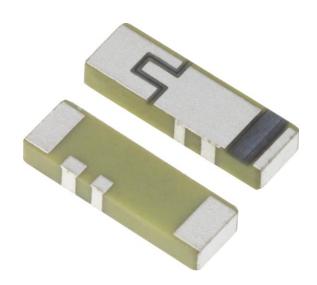

- Frequency: 1558-1616/2400-2500MHz
- Omni directional radiation
- Low profile
- Size W x L x H (10 x 3.2 x 1.5mm)
- · Lead free materials
- Fully SMD compatible
- MSL Level 1
- RoHS Compliant

## **Applications:**

- Combo 2-in-1 Antenna
- Single feed point
- GNSS L1 band
- Bluetooth, WLAN, WiFi (2.4 2.5GHz)

All dimensions are in mm / inches

Issue: 2049

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



#### **TECHNICAL DATA SHEET**

**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 

PART NUMBER: W3056

### **ELECTRICAL SPECIFICATIONS**

Antenna Type Ceramic Chip

Frequency 1558-1616MHz/2.4-2.5GHz

Nominal Impedance 50  $\Omega$ 

Return Loss / Max ( BD / GPS / GLONASS / BT) -4 / -5 / -3 / -7 ( dB )

Radiation Pattern – XY Plane & ZY Plane Omni

Radiation Pattern – ZX Plane Directional

Gain / Min (BD / GPS / GLONASS / BT) -0.5 / 0.5 / 0 / 2 (dBi)

Efficiency / Min (BD / GPS / GLONASS / BT) 35% / 45% / 45% / 65%

Polarization Linear-Vertical

Power Withstanding 1W

## **MECHANICAL SPECIFICATIONS**

Overall Length 10mm
Weight 0.24g
Antenna Color White

### **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature  $-40 \sim +85^{\circ}$  C Storage Temperature  $-40 \sim +85^{\circ}$  C

RoHS Compliant Yes




#### **TECHNICAL DATA SHEET**

**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 

PART NUMBER: W3056

## **MECHANICAL DRAWING**

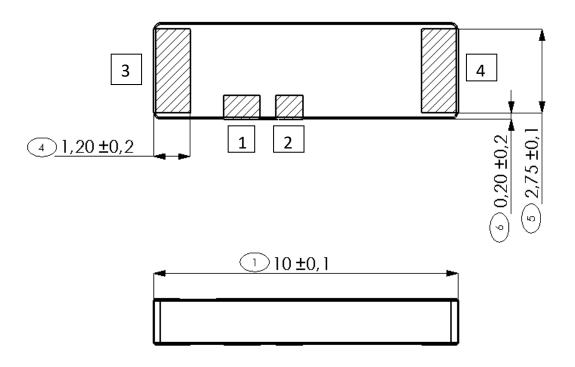

No.	Terminal Name	Terminal Dimensions
1	Feed	1.34 x 0.80 mm
2	GND	1.00 x 0.80 mm
3	GND	2.75 x 1.20 mm
4	GND	2.75 x 1.20 mm



#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 

PART NUMBER: W3056

### **TEST SETUP**

### Test board information

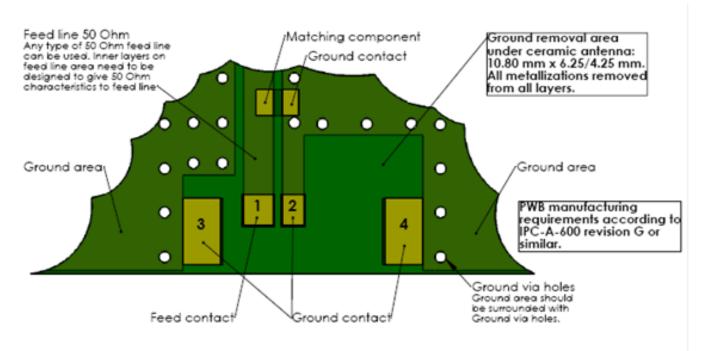

Note: Electrical characteristics are measured on test pwb with matching circuit (2.2 nH shunt matching inductor on feed).

## Recommended Antenna Pad Dimensions on PWB Layout (top surface)

PWB features			
No.	Terminal Name	Terminal Dimensions	
1	Feed	1.45 x 1.34 mm	
2	GND	1.45 x 1.00 mm	
3	GND	3.00 x 1.70 mm	
4	GND	3.00 x 1.70 mm	





#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 


PART NUMBER: W3056

### **TEST SETUP**

Recommended ground clearance area under antenna on PWB (top surface)

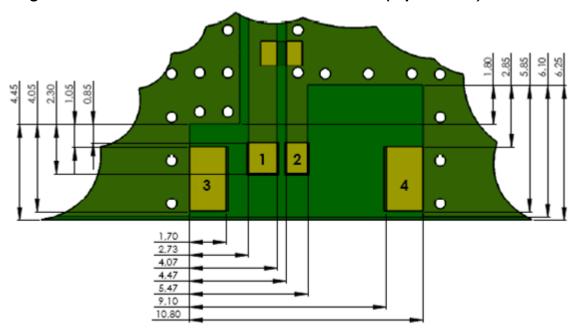

Recommended ground clearance area under antenna on PWB (bottom surface)

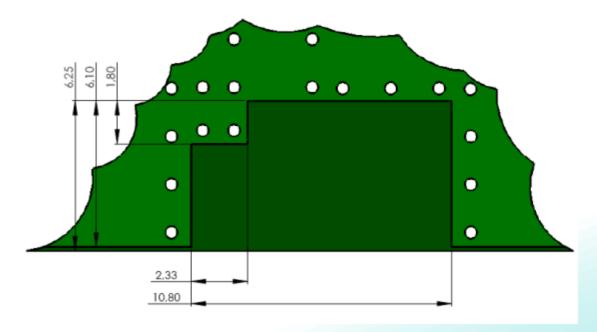





#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 

PART NUMBER: W3056

## **CHARTS**

# **Return Loss/GNSS**

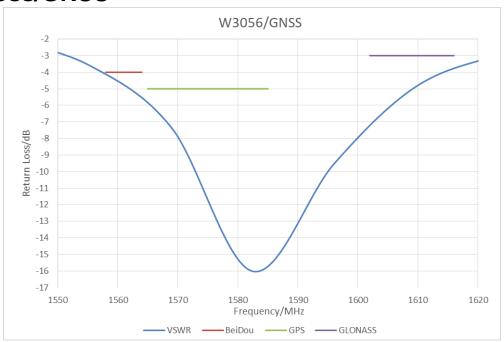

# **Return Loss/BT**





#### TECHNICAL DATA SHEET

**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 


PART NUMBER: W3056

## **CHARTS**

# **Peaking Gain/ GNSS**



Rad Efficiency/ GNSS

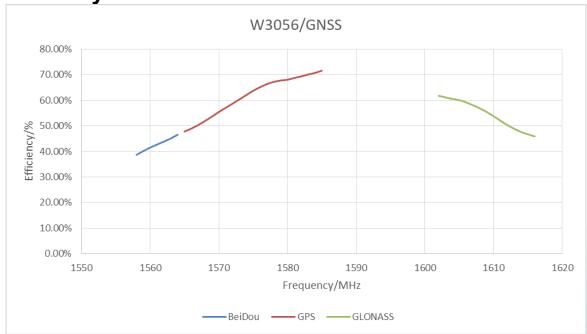





#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 


**Antenna** 


PART NUMBER: W3056


### **CHARTS**

# Typical Free Space Radiation Patterns / BeiDou

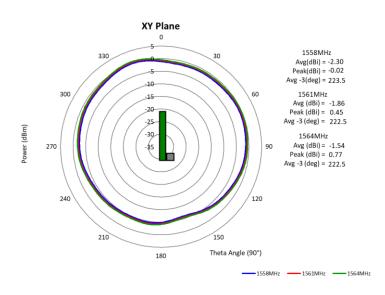

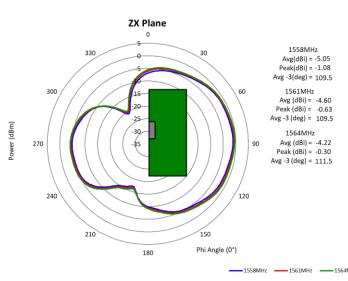

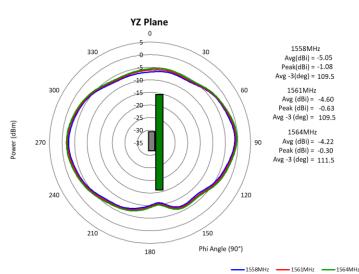

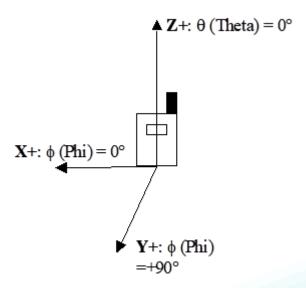



# TECHNICAL DATA SHEET

**Description: Ceramic Single Feed GNSS/BT** 


**Antenna** 


PART NUMBER: W3056


**Series: Ceramic Antenna** 


### **CHARTS**

# Typical Free Space Radiation Patterns / GPS

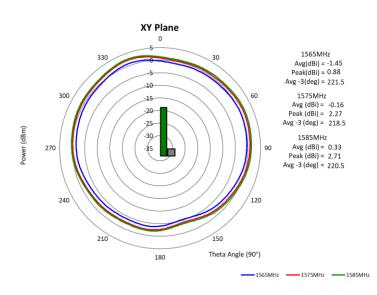

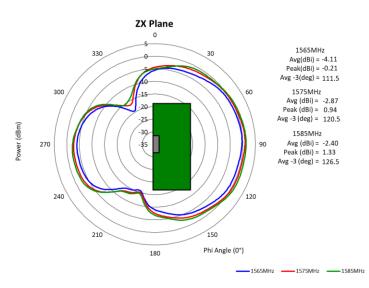

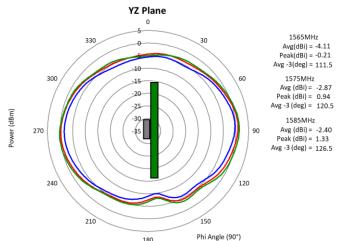

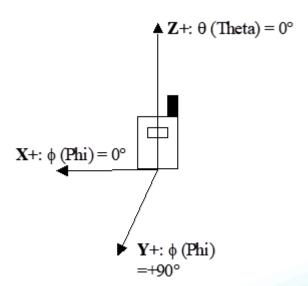



#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 


**Antenna** 


PART NUMBER: W3056


### **CHARTS**

# **Typical Free Space Radiation Patterns / GLONASS**

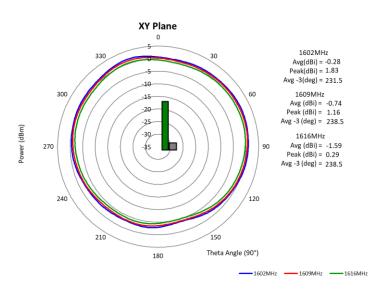

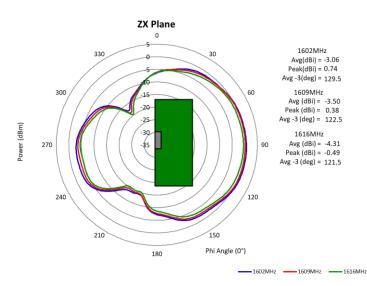

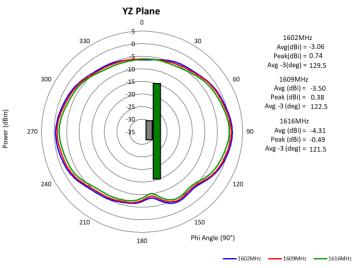

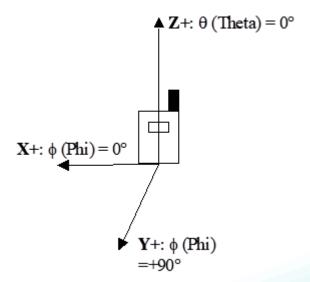



#### **TECHNICAL DATA SHEET**


**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 


PART NUMBER: W3056

### **CHARTS**

# Peaking Gain/BT(2.4G-2.5G)

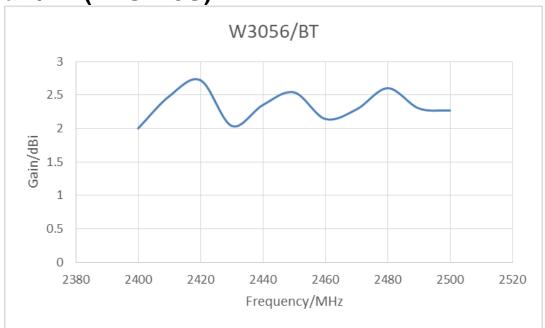

# Rad Efficiency/ BT(2.4G-2.5G)

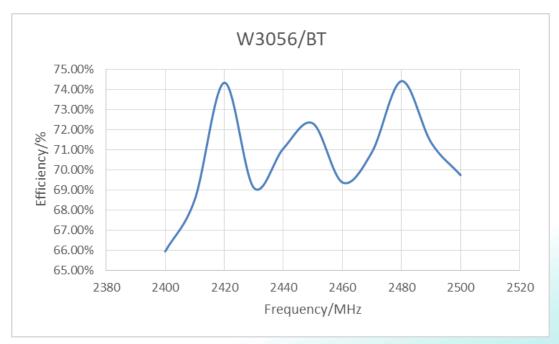

Issue: 2049

ROHS

11



#### **TECHNICAL DATA SHEET**

**Description: Ceramic Single Feed GNSS/BT** 

**Antenna** 

**PART NUMBER: W3056** 

### **CHARTS**

# Typical Free Space Radiation Patterns / BT(2.4G-2.5G)

