


Internal Single-Band Dipole Antenna 4.9-5.85 GHz

Pulse Part Number W3593B0100

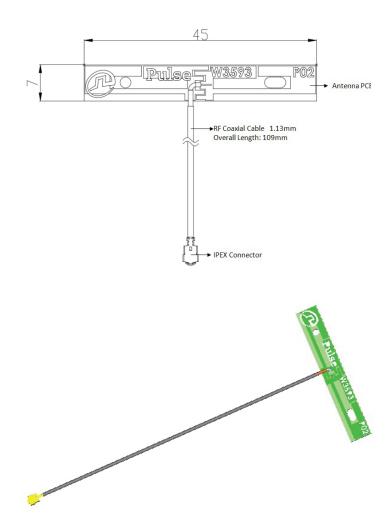

The W3593B antennas are internal PCB Single Band dipoles that cover the entire 4.9 – 5.85 GHz band. The W3593B0100 has a 100MM cable assembly with a standard IPEX connector for ease of connection on the board. With efficiency over 50% and a gain of 2dbi, the W3593 antennas are perfect internal options for WiFi applications. The wideband coverage is an ideal solution for industrial applications and data transmission and communication especially in IoT devices. The W3593B0100 is also an excellent internal solution for many applications in the Public Safety market.

Features

- Size WxLxH (7 x 45 x .8mm)
- For WiFi devices using 4.9 5.8 GHz and other applications in 4.9 5.8 GHz band
- Omnidirectional radiation pattern provides broad 360° coverage
- 10 inches cable length
- Various cable length from 3.9 to 10 inch also available
- RoHS Compliant

Applications

- WiFi in the 4.9 5.85 GHz band
- Data Transmission in IoT devices
- Industrial Applications
- Public Safety

| Part Number | Cable Type | Cable Length (Inches/Meters) | Connector Type & Gender |
|-------------|-------------------|------------------------------|-------------------------|
| W3593B0100 | RF Coaxial 1.13mm | 10/109mm | IPEX |

Confidential and Proprietary — Pulse Electronics — All Rights Reserved — 2015

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

San Diego, California 858 674 8100 Vancouver, Washington 360 944 7551

Europe 49 7032 7806 0 China 86 512 6807 9998



Internal Single-Band Dipole Antenna 4.9-5.85 GHz

Pulse Part Number W3593B0100

Electrical Specifications

| Frequency | Freq 1 | 4.9-5.85 GHz |
|--------------------------------|--------|--------------|
| Nominal Impedance [Ω] | | 50 |
| Efficiency (Typical) Freq. | | 50% |
| VSWR | Freq 1 | 2:1 Max |
| Peak Gain Frequency | | 2 dBi |
| RL | | -10 dB Min |

Environmental Specifications

| Operating Temperature | -40/ +85 C° |
|-----------------------|-------------|
| operating remperature | +0/ 100 C |

Mechanical Specifications

| Antenna PCB | Base Material: Single side FR4 |
|-------------------------|---|
| Coaxial Cable (In/MM) | 10/1.13mm RF Coaxial Cable with IPEX Connector |
| Weight (lbs/grams) | 0.84 g |
| Thickness of PCB | 0.8 mm |
| Overall Length of PCB | 45 x 7 mm |
| Overall Length of Cable | 109 mm |
| Mounting | Internal |

San Diego, California 858 674 8100 Vancouver, Washington 360 944 7551

Europe 49 7032 7806 0 China 86 512 6807 9998