

# WLS15 Pro LED Strip Light with PICK-IQ



## Datasheet

This guide is designed to help you set up and install the WLS15 Pro LED Strip Light with PICK-IQ. For complete information on programming, performance, troubleshooting, dimensions, and accessories, please refer to the Instruction Manual and Device Register Map at [www.bannerengineering.com](http://www.bannerengineering.com). Search for p/n 219136 to view the Instruction Manual and p/n 219137 to view the Device Register Map. Use of this document assumes familiarity with pertinent industry standard and practices.



**Important:** Read the following instructions before operating the light. Please download the complete WLS15 Pro LED Strip Light with PICK-IQ technical documentation, available in multiple languages, from [www.bannerengineering.com](http://www.bannerengineering.com) for details on the proper use, applications, Warnings, and installation instructions of this device.




**Important:** Lea el siguiente instructivo antes de operar el luminario. Por favor descargue desde [www.bannerengineering.com](http://www.bannerengineering.com) toda la documentación técnica de los WLS15 Pro LED Strip Light with PICK-IQ, disponibles en múltiples idiomas, para detalles del uso adecuado, aplicaciones, advertencias, y las instrucciones de instalación de estos dispositivos.



**Important:** Lisez les instructions suivantes avant d'utiliser le luminaire. Veuillez télécharger la documentation technique complète des WLS15 Pro LED Strip Light with PICK-IQ sur notre site [www.bannerengineering.com](http://www.bannerengineering.com) pour les détails sur leur utilisation correcte, les applications, les notes de sécurité et les instructions de montage.

## Models

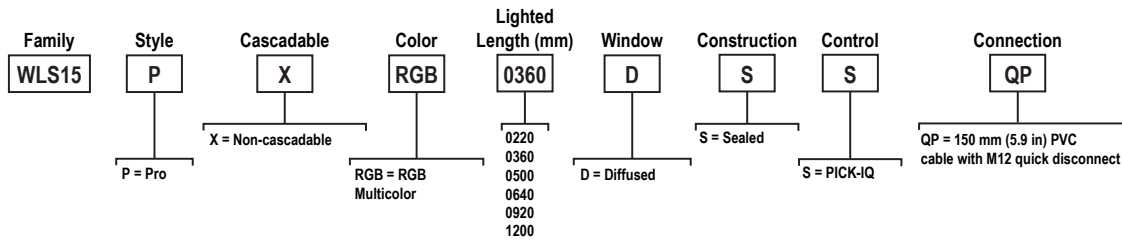

## Wiring Diagrams

Male	Pin	Wire Color	Description
	1	Brown	12 V DC to 30 V DC
	2	White	RS-485 (+)
	3	Blue	DC common
	4	Black	RS-485 (-)



## Specifications

### Supply Voltage

12 V DC to 30 V DC  
 Use only with suitable Class 2 power supply (UL) or a SELV power supply (CE)  
 See electrical characteristics on product label

Light Length	Typical Current			Maximum Current A
	12 V DC	24 V DC	30 V DC	
0220 mm	0.120	0.060	0.050	0.125
0360 mm	0.240	0.120	0.100	0.250
0500 mm	0.360	0.180	0.150	0.375
0640 mm	0.480	0.240	0.200	0.500
0920 mm	0.720	0.360	0.300	0.750
1200 mm	0.960	0.480	0.400	1.000

### Supply Protection Circuitry

Protected against reverse polarity and transient voltages



**Note:** Do not spray cable with high-pressure sprayer, or cable damage will result.

### Construction

Clear anodized aluminum housing  
 Polycarbonate outer housing  
 Polyamide end caps

### Connections

150 mm (6 in) PVC cable with a 4-pin M12 male quick disconnect  
 Models with a quick disconnect require a mating cordset

### Mounting

Integral mounting slots for M4 (#8) screws, tighten to 0.56 N-m (5 in-lbf) max torque  
 Multiple bracket options available  
 Secure cables within 150 mm (5.9 in) of the light



**Note:** It is recommended to use the provided mounting bushings when mounting using the endcaps. Center the mounting bushings in each slot to allow for expansion and contraction. Install using a M4 (#8) screw in each bushing torqued to a maximum of 0.45 N-m (4 in-lbf). For 920 mm and 1200 mm models in environments that vary more than 10 °C (18 °F), it is recommended to use one of the mounting bracket options instead of the end cap slots. If using the LMBWLS15 clip bracket and additional attachment is desired, only one end may be fastened using one of the spacers provided in the LMBWLS15 hardware packet to allow the opposite end to expand and contract. See mounting options in the instruction manual for bracket and tape options that allow expansion and contraction over temperature variations.

### Environmental Rating

Rated IEC IP66 and IEC IP67  
 Suitable for wet locations per UL 2108

### Vibration and Mechanical Shock

Vibration: 10 Hz to 55 Hz, 1.0 mm peak-to-peak amplitude per IEC 60068-2-6  
 Shock: 15G 11 ms duration, half sine wave per IEC 60068-2-27

### Operating Temperature


-40 °C to +50 °C (-40 °F to +122 °F)

**Storage Temperature:** -40 °C to +70 °C (-40 °F to +158 °F)

### Certifications



## Dimensions

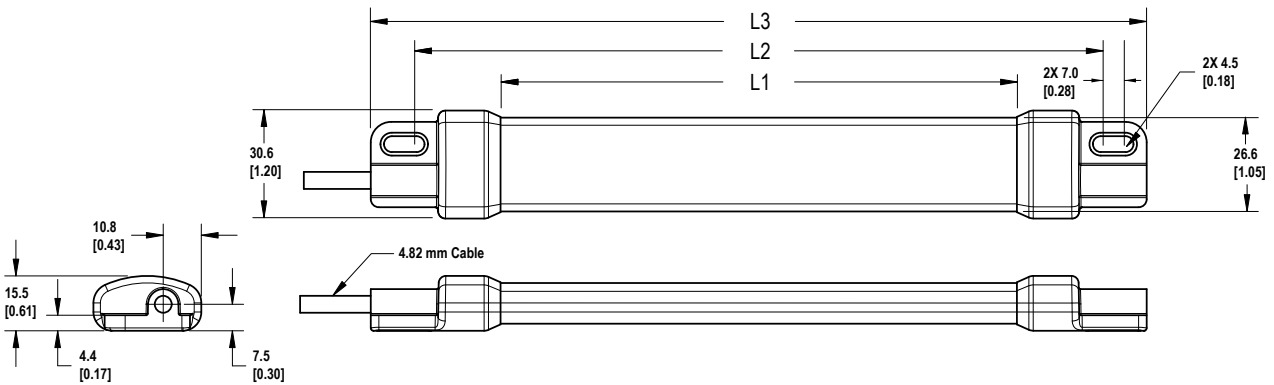

Models	L1	L2	L3
WLS15..0220..	146.4 mm (5.76 inches)	194 mm (7.64 inches)	220 mm (8.66 inches)
WLS15..0360..	286.4 mm (11.28 inches)	334 mm (13.15 inches)	360 mm (14.17 inches)
WLS15..0500..	426.4 mm (16.79 inches)	474 mm (18.66 inches)	500 mm (19.69 inches)
WLS15..0640..	566.4 mm (22.3 inches)	614 mm (24.17 inches)	640 mm (25.2 inches)
WLS15..0920..	846.4 mm (33.32 inches)	894 mm (35.2 inches)	920 mm (36.22 inches)
WLS15..1200..	1126.4 mm (44.35 inches)	1174 mm (46.22 inches)	1200 mm (47.24 inches)