

# WLS70 Industrial LED Strip Light (AC)



## Quick Start Guide

This guide is designed to help you set up and install the WLS70 Industrial LED Strip Light (AC). For complete information on programming, performance, troubleshooting, dimensions, and accessories, please refer to the Instruction Manual at [www.bannerengineering.com](http://www.bannerengineering.com). Search for p/n 220753 to view the Instruction Manual. Use of this document assumes familiarity with pertinent industry standards and practices.



**Important:** Read the following instructions before operating the light. Please download the complete WLS70 Industrial LED Strip Light (AC) technical documentation, available in multiple languages, from [www.bannerengineering.com](http://www.bannerengineering.com) for details on the proper use, applications, Warnings, and installation instructions of this device.




**Important:** Lea el siguiente instructivo antes de operar el luminario. Por favor descargue desde [www.bannerengineering.com](http://www.bannerengineering.com) toda la documentación técnica de los WLS70 Industrial LED Strip Light (AC), disponibles en múltiples idiomas, para detalles del uso adecuado, aplicaciones, advertencias, y las instrucciones de instalación de estos dispositivos.



**Important:** Lisez les instructions suivantes avant d'utiliser le luminare. Veuillez télécharger la documentation technique complète des WLS70 Industrial LED Strip Light (AC) sur notre site [www.bannerengineering.com](http://www.bannerengineering.com) pour les détails sur leur utilisation correcte, les applications, les notes de sécurité et les instructions de montage.

## Models

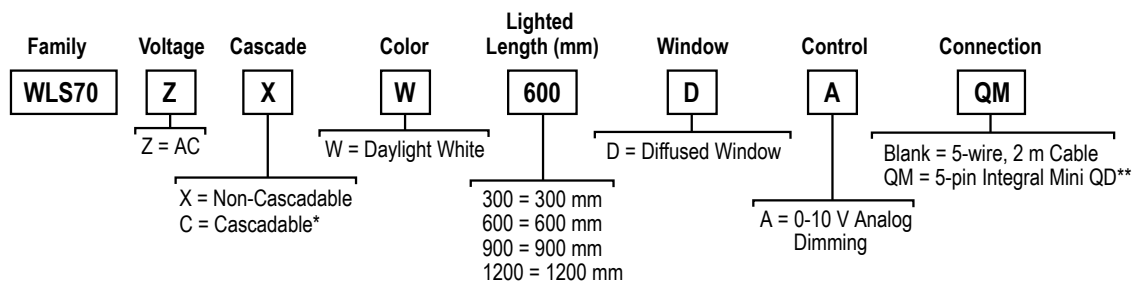

\*Cascadable models only available with QM connection.

\*\*Models with a quick disconnect require a mating cordset. See [Cordsets](#) on p. 3.

## Installing the WLS70 Industrial LED Strip Light

Figure 1. Attaching the Clamp Brackets (Step 3)


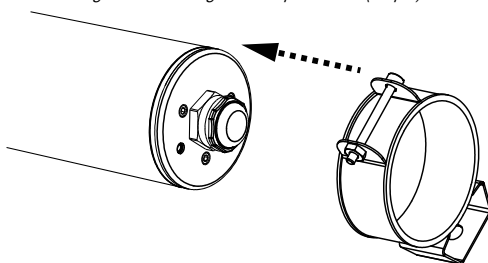


Figure 2. Verifying the Cascade Cover is Attached (Step 10)



1. Turn off power at fuse or circuit breaker box.
2. Remove the light from the packaging and inspect it for damage before installing it.
3. Attach the included LMBWLS70T clamp brackets to the light. Slide on gasket if desired.  
Refer to the instruction manual for a complete list of compatible brackets.
4. Select a suitable horizontal or vertical mounting location.
5. Place the light in the mounting location and mark the positions of the bracket mounting holes.  
The optional LMBWLS70HK bracket can be used to hang the light in conjunction with the LMBWLS70T (see [Brackets](#) on p. 3).
6. Drill the holes and use appropriate screws to secure the bracket to the mounting location.



7. Clamp the light onto the brackets.
8. When daisy chaining multiple lights, follow steps 1 through 5 to mount additional lights. See the application note in [Specifications](#) on p. 2 for the maximum allowed lights daisy chained together and maximum allowed cable run when choosing mounting locations.
9. Connect the daisy chained units together using cascade cordsets (see [Cordsets](#) on p. 3).
10. Verify the supplied cascade cover is on the output connector of the last light in the chain.
11. Attach cables (cabled model) or cordsets (quick-disconnect model) per the wiring diagram. Terminate wire as appropriate per application.

Installation is complete. Turn on electricity at fuse or circuit breaker box.



**WARNING:**

- Risk of electric shock
- Failure to follow these instructions could result in serious injury or death.
- Disconnect or turn off power before installing, removing, or servicing the device.
- Install and connect the device in accordance with the National Electrical Code (NEC) and any applicable local code requirements and supply the device with an appropriate fuse box or circuit breaker (see [Specifications](#)).

Wiring Diagram

Diagram	Wire	Connection	Pinout (Male)	Pinout (Female)
	L - Black	Line/Hot	<p>1 = Purple 2 = White 3 = Yellow/Green 4 = Black 5 = Gray</p>	<p>1 = Purple 2 = White 3 = Yellow/Green 4 = Black 5 = Gray</p>
	N - White	Neutral		
	- Green/Yellow	Earth ground		
	Dim (+) - Purple	0-10 V DC analog dimming		
	Dim (-) - Gray	Return analog dimming		

Specifications

**Supply Voltage**

Nominal voltage: 120 V AC to 277 V AC, 60 Hz in North America  
 Nominal voltage: 100 V AC to 277 V AC, 50/60 Hz outside North America  
 Power factor: > 0.95 at 120 V AC and > 0.90 at 277 V AC  
 Total harmonic distortion (THD): < 20%  
 See electrical characteristics on product label

**Supply Current**

Lighted Length (mm)	Max. Current Draw (A) at 100 V AC	Typical Current Draw (A)		
		120 V AC	230 V AC	277 V AC
300	0.120	0.080	0.040	0.040
600	0.220	0.165	0.080	0.070
900	0.320	0.240	0.130	0.110
1200	0.420	0.315	0.160	0.140

**Dimming**

Compatible with 0-10 V analog LED dimming, dimmable to 5% intensity  
 Dimming current: <1.0 mA

**Supply Protection Circuitry**

Protected against transient voltages

**Construction**

Clear anodized aluminum housing; polycarbonate outer housing

**Mounting**

Several optional mounting brackets are available (see Accessories)

**Connections**

Integral 5-pin 7/8" Mini-style quick disconnect (8A / 300V / 2.5kV / 2), (5-pin connecting cordset required); or 2 m (6.5 ft) integral STOOV UL/HAR PVC cable  
 See [Cordsets](#) on p. 3

**Environmental Rating**

IEC IP65

**LED Lifetime**

When operating within specifications, output will decrease less than 30% after 50,000 hours.

**Application Notes**

When connecting continuous run/cascadable lights in series, it is important not to exceed maximum current limitations of 8A. For example: the typical current draw of a 1200 mm fixture at 120 V is 0.315A. 8A/0.315A yields a maximum of 25 fixtures cascaded together.  
 Two or more lights installed in parallel must maintain a 150 mm (6 inch) spacing to maintain a 50 °C operating temperature.

**Certifications and Approvals**



UL/cULus E338626

**Operating Temperature**

Surface Mount Installation: -40 °C to +50 °C (-40 °F to +122 °F)  
 85% at +50 °C maximum relative humidity (non-condensing)

**Storage Temperature**

-40 °C to +70 °C (-40 °F to +158 °F)

**Vibration and Mechanical Shock**

Vibration: 10 Hz to 55 Hz, 0.5 mm peak-to-peak amplitude per IEC 60068-2-6 (5 minute sweep, 30 minute dwell)  
 Shock: 15G 11 ms duration, half sine wave per IEC 60068-2-27  
 Impact: IK10 (IEC 60068-2-75)


**Light Characteristics**

Daylight White Efficacy: up to 143 lumens/watt typical at 120 V AC at 25 °C (77 °F)  
 CRI: 82, typical

Model	Color	Color Temperature (CCT)	Lumens (Typical at 25 °C)	Watts at 120 V AC	Luminous Efficacy (lm/w)
300	Daylight White	5000 K (±300 K)	1350	9.6	141
600	Daylight White	5000 K (±300 K)	2700	19.8	136
900	Daylight White	5000 K (±300 K)	4050	28.8	141
1200	Daylight White	5000 K (±300 K)	5400	37.8	143

## Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.

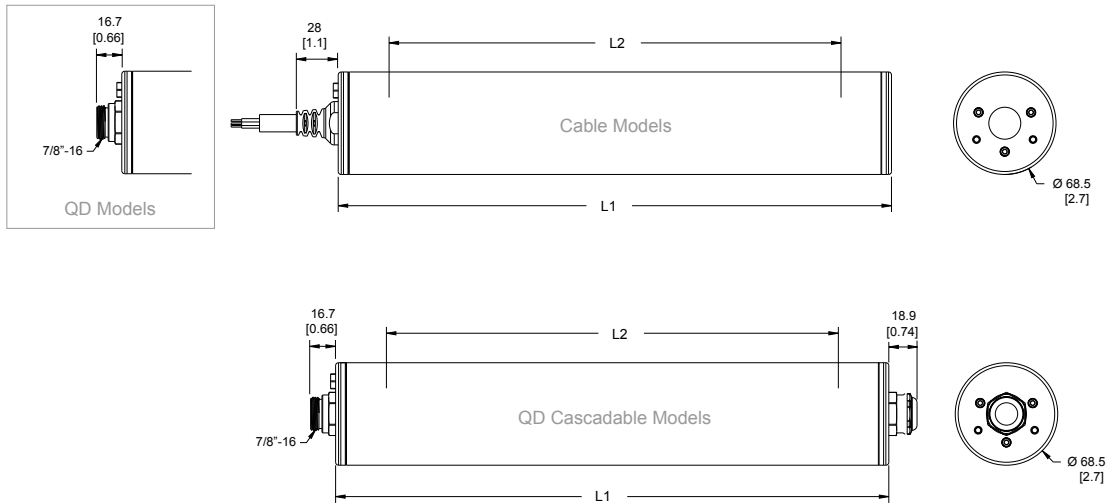

Model	Housing Length (L1)	Lighted Length (L2)
WLS70..300..	369.8	302
WLS70..600..	667.6	600
WLS70..900..	965.3	898
WLS70..1200..	1263	1196


## Accessories

### Brackets

All measurements are listed in millimeters, unless noted otherwise. Refer to the instruction manual for a complete list of compatible brackets.


#### LMBWLS70T

- Stainless steel
- Includes two clamp brackets for hanging or surface mount, two anti-rotation gaskets, and stainless steel hardware for securing the bracket to the light
- For use with M8 or 5/16" mounting hardware



#### LMBWLS70HK

- Hanging bracket kit allows for suspended installation
- Includes two hanging bracket assemblies
- For use with bracket LMBWLS70T



**Note:** The LMBWLS70T is supplied with the light.

## Cordsets

5-Pin Threaded 7/8-in Cordsets--Single Ended				
Model	Length	Style	Dimensions	Pinout (Female)
MBCCL-506	2 m (6.56 ft)	Straight		<p>1 = Purple 2 = White 3 = Yellow/Green 4 = Black 5 = Gray</p>
MBCCL-515	5 m (16.4 ft)			
MBCCL-530	9 m (29.5 ft)			