




**XP2301GN-HF**


**Halogen-Free Product**

**P-CHANNEL ENHANCEMENT MODE  
POWER MOSFET**

- ▼ Simple Drive Requirement
- ▼ Small Package Outline
- ▼ Surface Mount Device
- ▼ RoHS Compliant



$BV_{DSS}$	-20V
$R_{DS(ON)}$	130m $\Omega$
$I_D$	- 2.6A

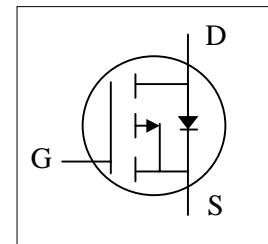

## Description

XP2301 series are innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The special design SOT-23 package with good thermal performance is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for voltage conversion or switch applications.

## Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	- 20	V
$V_{GS}$	Gate-Source Voltage	+12	V
$I_D @ T_A=25^\circ\text{C}$	Drain Current <sup>3</sup> , $V_{GS} @ 5\text{V}$	-2.6	A
$I_D @ T_A=70^\circ\text{C}$	Drain Current <sup>3</sup> , $V_{GS} @ 5\text{V}$	-2.1	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	-10	A
$P_D @ T_A=25^\circ\text{C}$	Total Power Dissipation	1.38	W
	Linear Derating Factor	0.01	W/ $^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient <sup>3</sup>	90	$^\circ\text{C}/\text{W}$

**Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-20	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-5\text{V}, I_{\text{D}}=-2.8\text{A}$	-	-	130	$\text{m}\Omega$
		$V_{\text{GS}}=-2.8\text{V}, I_{\text{D}}=-2.0\text{A}$	-	-	190	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-0.5	-	-1.25	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-5\text{V}, I_{\text{D}}=-2\text{A}$	-	4	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=-20\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	$\text{uA}$
	Drain-Source Leakage Current ( $T_j=70^\circ\text{C}$ )	$V_{\text{DS}}=-16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-10	$\text{uA}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 12\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	$\text{nA}$
$Q_g$	Total Gate Charge <sup>2</sup>	$I_{\text{D}}=-2\text{A}$	-	5	9	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=-16\text{V}$	-	1	-	$\text{nC}$
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	2	-	$\text{nC}$
$t_{\text{d}(\text{on})}$	Turn-on Delay Time <sup>2</sup>	$V_{\text{DS}}=-10\text{V}$	-	6	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	17	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_{\text{G}}=3.3\Omega$	-	16	-	ns
$t_f$	Fall Time	$V_{\text{GS}}=-10\text{V}$	-	5	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	270	-	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-20\text{V}$	-	70	-	$\text{pF}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	55	-	$\text{pF}$

**Source-Drain Diode**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$I_s$	Continuous Source Current ( Body Diode )	$V_D=V_G=0\text{V}, V_S=-1.2\text{V}$	-	-	-1	A
$I_{\text{SM}}$	Pulsed Source Current ( Body Diode ) <sup>1</sup>		-	-	-10	A
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$T_j=25^\circ\text{C}, I_s=-1.6\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V

**Notes:**

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board,  $t \leq 10\text{s}$  ;  $270^\circ\text{C}/\text{W}$  when mounted on min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

XSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. XSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

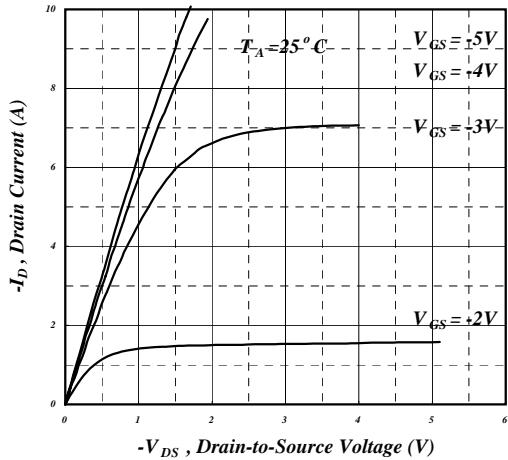


Fig 1. Typical Output Characteristics

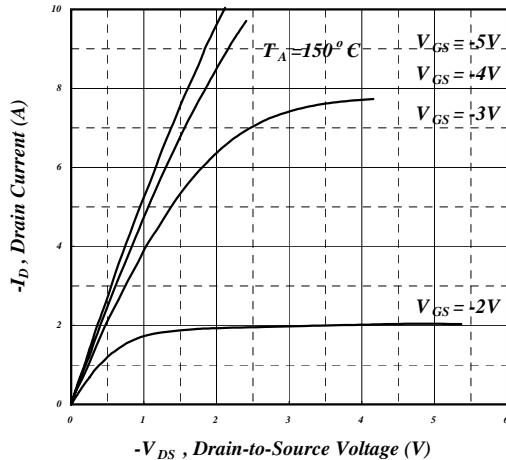


Fig 2. Typical Output Characteristics

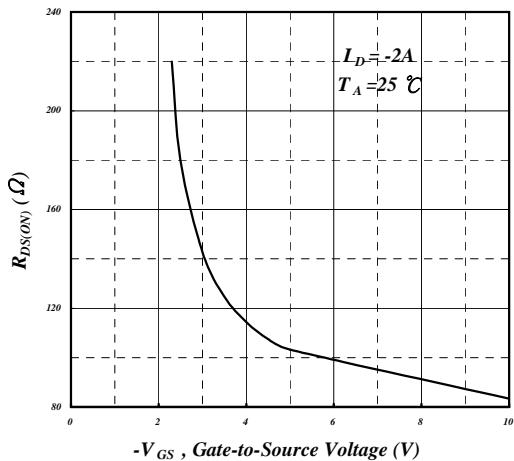


Fig 3. On-Resistance v.s. Gate Voltage

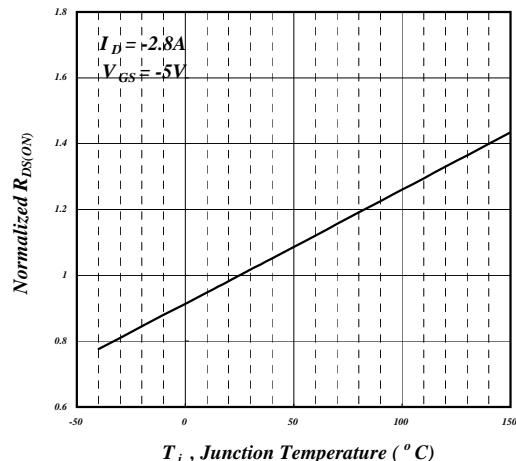


Fig 4. Normalized On-Resistance

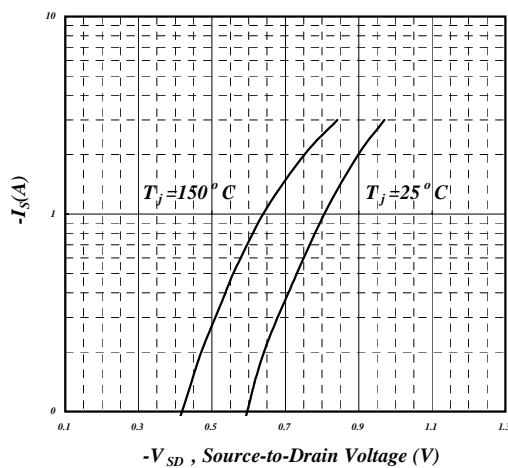


Fig 5. Forward Characteristic of Reverse Diode



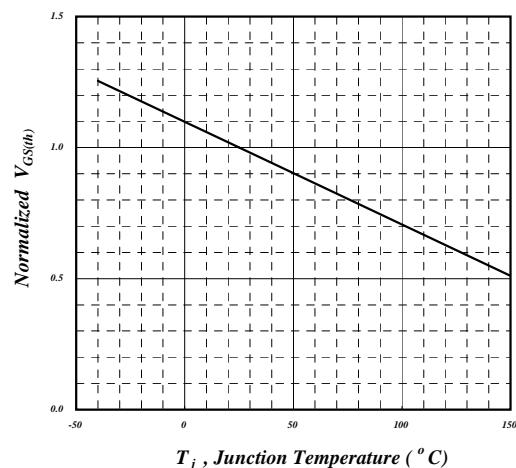



Fig 6. Gate Threshold Voltage v.s. Junction Temperature

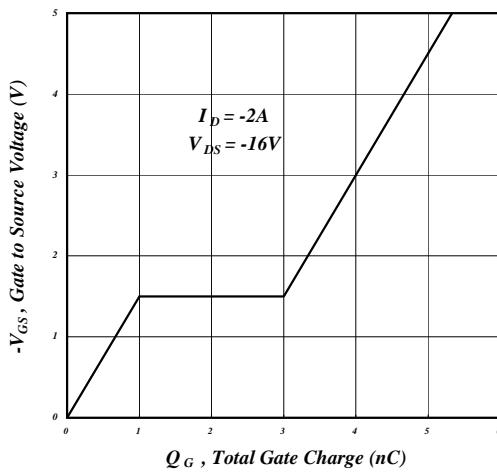


**Fig 7. Gate Charge Characteristics**

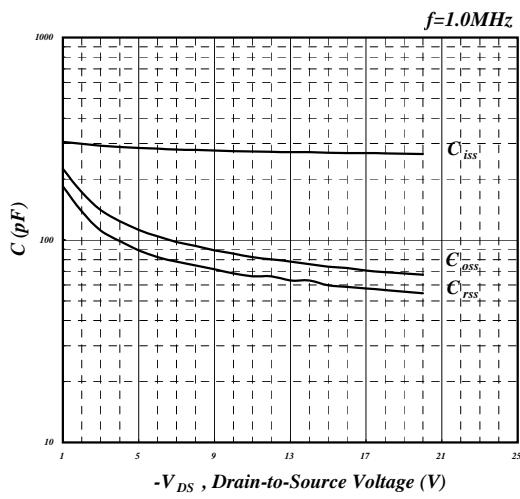


**Fig 8. Typical Capacitance Characteristics**

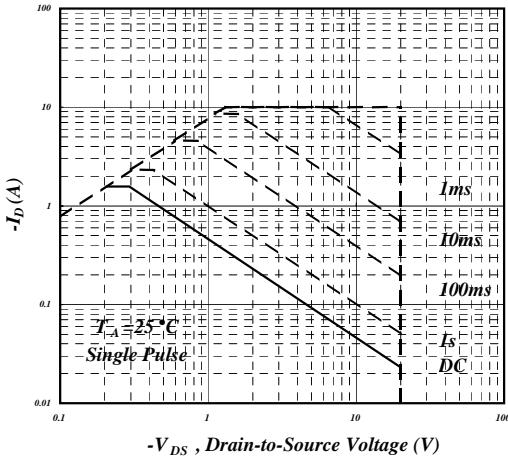


**Fig 9. Maximum Safe Operating Area**

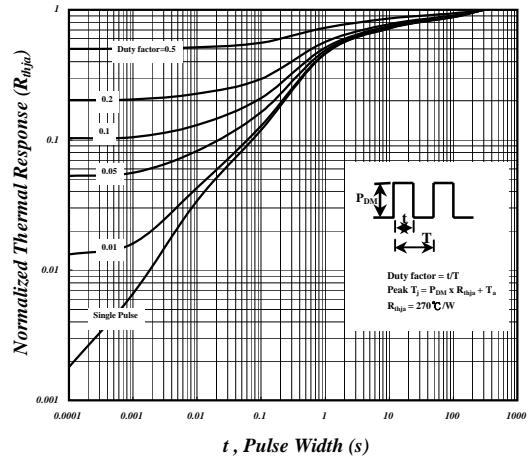

**Fig 10. Effective Transient Thermal Impedance**

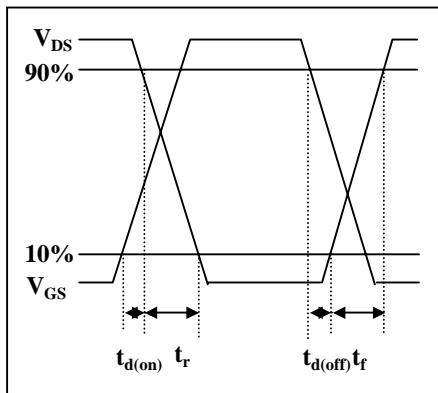

**Fig 11. Switching Time Waveform**

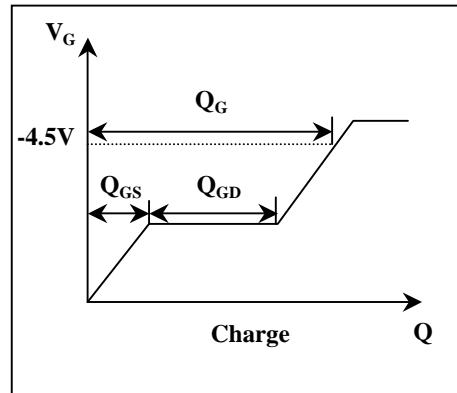

**Fig 12. Gate Charge Waveform**