

# Surface Mount Bandpass Filter

## SXBP-350+

50Ω 330 to 375 MHz

### Maximum Ratings


|                       |                |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| RF Power Input        | 0.5W Max.      |

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

|        |                  |
|--------|------------------|
| INPUT  | 1                |
| OUTPUT | 8                |
| GROUND | 2, 3, 4, 5, 6, 7 |

### Outline Drawing

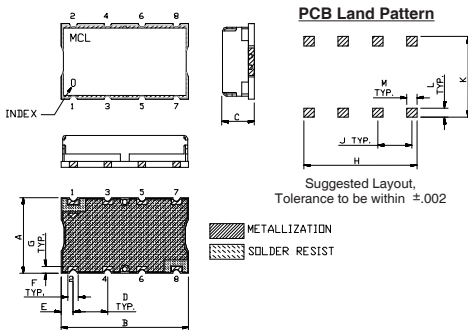


### Outline Dimensions (inch/mm)

|       |       |      |       |      |      |       |
|-------|-------|------|-------|------|------|-------|
| A     | B     | C    | D     | E    | F    |       |
| .44   | .74   | .27  | .200  | .07  | .060 |       |
| 11.18 | 18.80 | 6.86 | 5.08  | 1.78 | 1.52 |       |
| G     | H     | J    | K     | L    | M    | wt.   |
| .040  | .660  | .200 | .470  | .055 | .060 | grams |
| 1.02  | 16.76 | 5.08 | 11.94 | 1.40 | 1.52 | 3.0   |

Note: Please refer to case style drawing for details

### Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

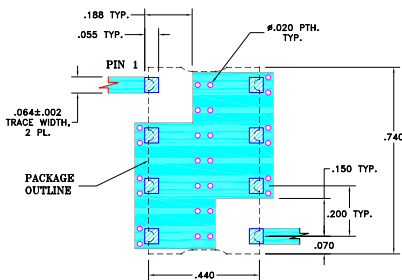


### Features

- high rejection
- Flat group delay @ passband
- good VSWR, 1.2:1 typ @ passband
- shielded case
- aqueous washable

### Applications

- radio link
- receivers / transmitters
- harmonic rejection



Generic photo used for illustration purposes only  
CASE STYLE: HF1139


### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Bandpass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

| CENTER FREQ. (MHz) | PASSBAND (MHz) (Loss < 3dB)     | STOPBANDS (MHz) |                |                |                | VSWR (:1) |      |      |
|--------------------|---------------------------------|-----------------|----------------|----------------|----------------|-----------|------|------|
|                    |                                 | Loss > 20dB     | Loss > 40dB    | Passband       | Stopband       | Typ.      | Max. | Typ. |
| F <sub>c</sub>     | F <sub>1</sub> - F <sub>2</sub> | F <sub>3</sub>  | F <sub>4</sub> | F <sub>5</sub> | F <sub>6</sub> |           |      |      |
| 350                | 330 - 375                       | 280             | 435            | 245            | 520 - 2000     | 1.2       | 1.5  | 20   |

### Typical Frequency Response



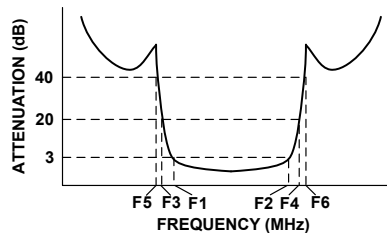


### Functional Schematic

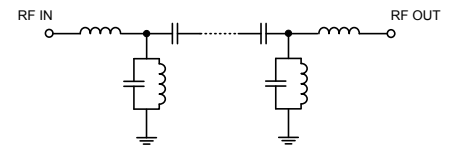

### Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) |          | Return Loss (dB) | Frequency (MHz) | Group Delay (nSec) |
|-----------------|---------------------|----------|------------------|-----------------|--------------------|
|                 | $\bar{x}$           | $\sigma$ |                  |                 |                    |
| 0.5             | 77.48               | 2.27     | 0.24             | 330.0           | 16.58              |
| 245.0           | 51.21               | 0.45     | 0.22             | 332.0           | 15.81              |
| 280.0           | 32.44               | 0.51     | 0.29             | 334.0           | 15.15              |
| 300.0           | 17.62               | 0.71     | 1.01             | 338.0           | 14.32              |
| 310.0           | 8.62                | 0.78     | 3.07             | 342.0           | 13.74              |
| 315.0           | 4.82                | 0.59     | 6.57             | 346.0           | 13.33              |
| 320.0           | 2.74                | 0.32     | 15.40            | 350.0           | 13.10              |
| 330.0           | 1.89                | 0.19     | 17.22            | 354.0           | 12.98              |
| 342.0           | 1.69                | 0.20     | 22.55            | 355.0           | 12.96              |
| 350.0           | 1.69                | 0.19     | 26.48            | 358.0           | 12.91              |
| 366.0           | 1.87                | 0.19     | 19.67            | 362.0           | 12.89              |
| 375.0           | 2.09                | 0.18     | 23.06            | 366.0           | 13.20              |
| 385.0           | 4.07                | 0.24     | 11.76            | 370.0           | 13.78              |
| 392.0           | 7.99                | 0.31     | 5.74             | 375.0           | 15.23              |
| 405.0           | 16.28               | 0.29     | 2.56             | 378.0           | 16.30              |
| 435.0           | 30.23               | 0.18     | 1.21             | 380.0           | 16.90              |
| 520.0           | 50.91               | 0.07     | 0.55             | 385.0           | 17.12              |
| 2000.0          | 56.91               | 0.26     | 0.35             | 390.0           | 15.07              |

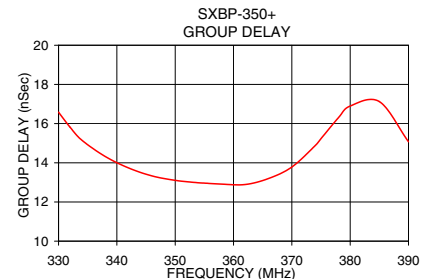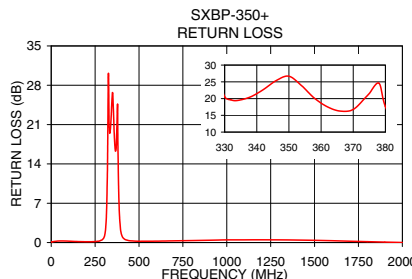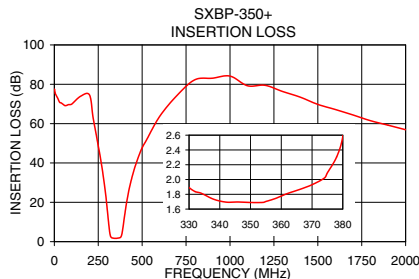

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

