



MMIC SURFACE MOUNT


# X2 Frequency Multiplier

## CY2-44+

50Ω Output 12.4 to 40 GHz

### THE BIG DEAL

- Wideband, output 12.4 to 40 GHz
- Low conversion loss, 14 dB typ.
- Good fundamental & harmonic suppression, F1, 26 dBc typ.; F3, 34 dBc typ.; F4, 18 dBc typ.
- Miniature size 3 x 3 x 0.89mm
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Synthesizers
- Local Oscillators
- 5G

### PRODUCT OVERVIEW

Mini-Circuits' CY2-44+ is an ultra-wideband MMIC frequency doubler, converting input frequencies from 6.2 to 20 GHz into output frequencies from 12.4 to 40 GHz. Its wide output range makes this model suitable for broadband systems as well as a wide variety of narrowband applications. Utilizing GaAs HBT technology, the multiplier comes housed in a tiny 3 x 3 x 0.89mm MCLP package and offers excellent repeatability, low inductance, and good thermal efficiency.

### KEY FEATURES

Features	Advantages
Broadband, 12.4 to 40 GHz output	With an output frequency range spanning 12.4 to 40 GHz, this multiplier supports broadband applications such as defense and instrumentation as well as a wide range of narrowband system requirements including 5G.
Low conversion loss, 14 dB typ.	With a low conversion loss, CY2-44+ produces higher output power, reducing the need for post amplification.
Excellent fundamental and harmonic suppression: <ul style="list-style-type: none"> <li>• F1, 26 dBc</li> <li>• F3, 34 dBc</li> <li>• F4, 18 dBc</li> </ul>	Reduces spurious signals and the need for additional filtering.
Wide input power range, +12 to +18 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low conversion loss.
3 x 3 mm, 12 lead MCLP package	Low inductance, repeatable transitions, and excellent thermal contact to the PCB





MMIC SURFACE MOUNT

# X2 Frequency Multiplier

CY2-44+

50Ω Output 12.4 to 40 GHz

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C

Parameter	Input Frequency (GHz)	Min.	Typ.	Max.	Unit
Multiplier Factor			2		
Frequency Range, Input (F1)		6.2 16	— —	16 20	GHz
Frequency Range, Output (F2)		12.4 32	— —	32 40	GHz
Input Power		12	—	18	dBm
Conversion Loss	6.2 - 16 16 - 20	— —	14 17	20 23	dB
Harmonic Output <sup>2</sup>	F1	6.2 - 16 16 - 20	— —	26 27	— —
	F3	6.2 - 16 16 - 16.5	— —	34 36	— —
	F4	6.2 - 12.4	—	18	—

1. At +15 dBm input power measured on Mini-Circuits test board TB-973-CY244C+

2. Harmonics of input frequency below the power of F2. Harmonics are measured to 50 GHz.

### MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
RF Input Power	+21 dBm

Permanent damage may occur if any of these limits are exceeded.

### PAD CONNECTIONS

INPUT	5
OUTPUT	11
GROUND	4,6,10,12 & paddle
NO CONNECTIONS	all others

### PRODUCT MARKING

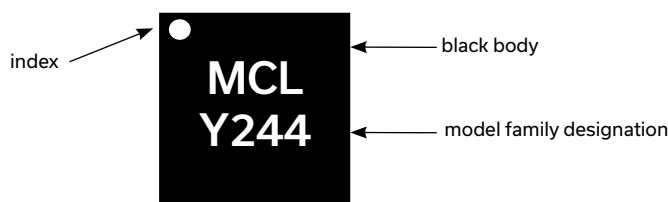

Marking may contain other features or characters for internal lot control





MMIC SURFACE MOUNT

# X2 Frequency Multiplier

## CY2-44+

Mini-Circuits

50Ω Output 12.4 to 40 GHz

### TYPICAL PERFORMANCE DATA

Input Frequency (MHz)	INPUT RF= +12 dBm				INPUT RF= +18 dBm			
	Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)		
		F2	F1	F3		F4	F2	F1
6.2	20.37	26.58	27.20	9.39	18.61	26.66	25.51	8.08
7.1	13.50	25.58	39.57	12.90	15.44	27.37	38.72	14.16
8.0	11.33	27.21	42.66	17.66	13.82	29.04	36.39	20.60
9.3	11.16	30.41	45.42	18.03	13.38	30.27	33.66	20.59
10.2	13.02	31.54	39.54	18.47	14.21	29.19	33.03	18.01
11.1	13.64	33.98	31.83	24.01	13.97	29.69	25.06	17.13
12.4	14.76	19.14	28.12	40.58	14.54	16.51	20.62	21.92
13.2	16.03	16.73	23.09	--	14.80	19.28	19.93	--
14.1	16.76	13.82	29.15	--	14.89	18.22	22.54	--
15.0	16.02	16.86	41.46	--	15.20	23.34	21.59	--
16.0	16.69	17.67	33.38	--	15.27	28.60	34.91	--
17.2	17.64	18.84	--	--	16.45	38.61	--	--
18.0	17.17	21.18	--	--	16.34	35.08	--	--
20.0	20.53	14.71	--	--	18.27	23.01	--	--

